





### specifications

CRI	Voltage	Ambient Temp (F)	Color Temp	Material	IP Rating	Efficacy	Gross Weight	Beam Angle	Warranty	Case QTY
80	100-277 V ⚡	-40° - 140°	5000K	copper free aluminum housing	IP 66	140 LM / W	11.02 lbs	120°	6 years	1 pcs

### select your fixture

Part Number	Color Temp	Consumption	Lumen Output	Emergency Driver	Dimensions
GI-EPR-C175-C1D2	5000K	30W	4,200	No	29.5" x 7.9" x 4.7"
GI-EPR-C175-EMC1D2	5000K	30W	4,200	Yes	29.5" x 7.9" x 4.7"

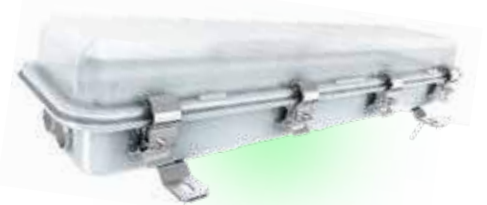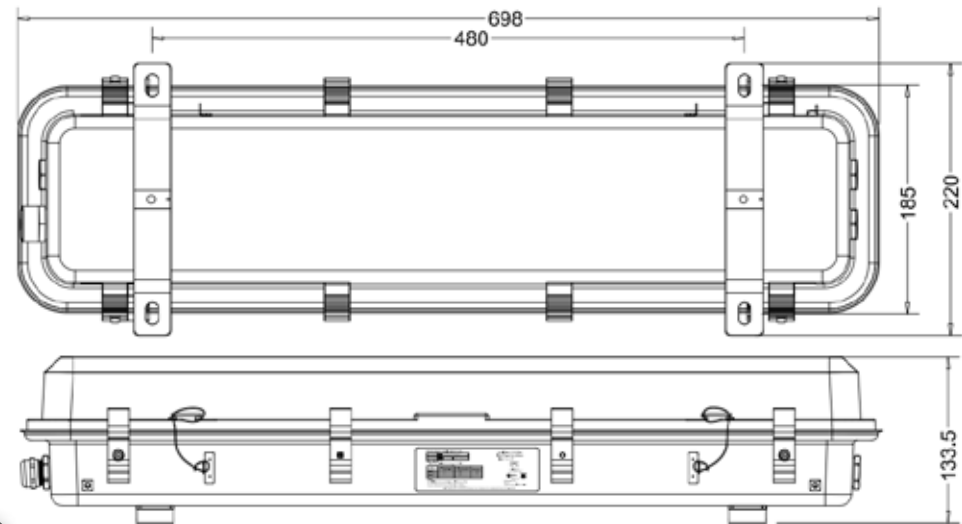

### Features

- Rated for high temperatures, humidity, dust and vapor locations
- Built for a variety of purposes such as spot light, tunnel light, and general illumination in hazardous locations
- Light weight design
- Heavy duty and high impact resistance
- Various installation options for particular applications
- Non-dimmable

### Distribution Diagram

Center Beam fc	Beam Width	
17ft	14fc	51ft
34ft	3fc	103ft
51ft	2fc	154ft
68ft	0.8fc	256ft
85ft	0.6fc	307ft

■ Vert, Spread; 120°  
■ Horiz, Spread; 120°



Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

