


### Z-PACK | Z-PACK 2mm HM

TE Internal #: 5352268-1 Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb /s, 22 Column, 5 Row, Mezzanine, 110 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM

#### View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > Hard Metric Backplane Connectors >

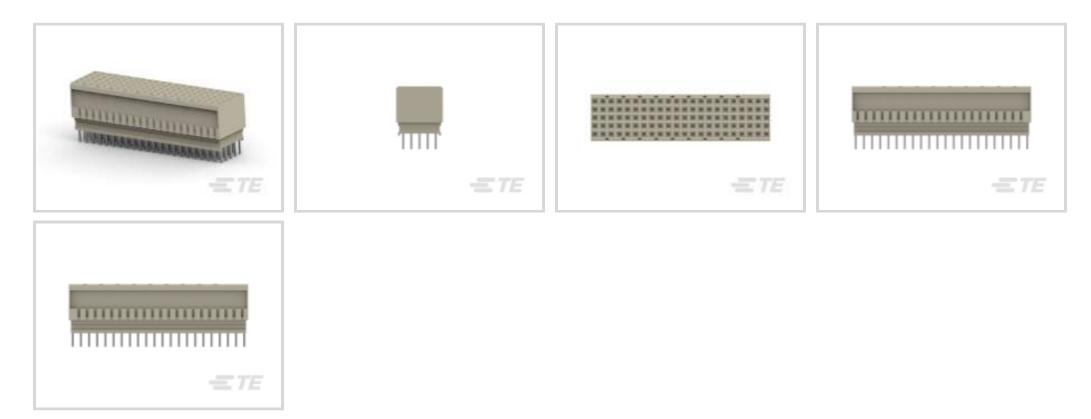

Hard Metric Backplane Receptacle Connector: Mezzanine, 2mm

PCB Connector Assembly Type: PCB Mount Receptacle

Data Rate: **≤1 Gb/s** 

Number of Columns: 22

Number of Rows: 5

Backplane Architecture: Mezzanine

All Hard Metric Backplane Receptacle Connector: Mezzanine, 2mm (27)



# Features

### **Product Type Features**

Backplane Interface Type	2mm HM
PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Mating & Unmating Configuration	Make First / Break Last
Rows Loaded	A, B, C, D, E
Number of Signal Positions	110
Number of Columns	22
Number of Rows	5
Backplane Architecture	Mezzanine

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 22 Column, 5 Row, Mezzanine, 110 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Number of Positions	110
PCB Mount Orientation	Vertical
Signal Characteristics	
Crosstalk Version	Standard
Data Rate	≤1 Gb/s
Body Features	
Primary Product Color	Gray
Contact Features	
Feedthrough Post Length	3.3 mm
CompactPCI Designation	None
Contact Type	Socket
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
Contact Current Rating (Max)	1.5 A

# Mechanical Attachment

Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester - GF
Centerline (Pitch)	2 mm[.078 in]
Dimensions	
Backplane Module Length	44 mm
Usage Conditions	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Shielded	No
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 22 Column, 5 Row, Mezzanine, 110 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



#### Packaging Features

Packaging Quantity	11
Packaging Method	Tube

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**




Also in the Series Z-PACK 2mm HM

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 22 Column, 5 Row, Mezzanine, 110 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



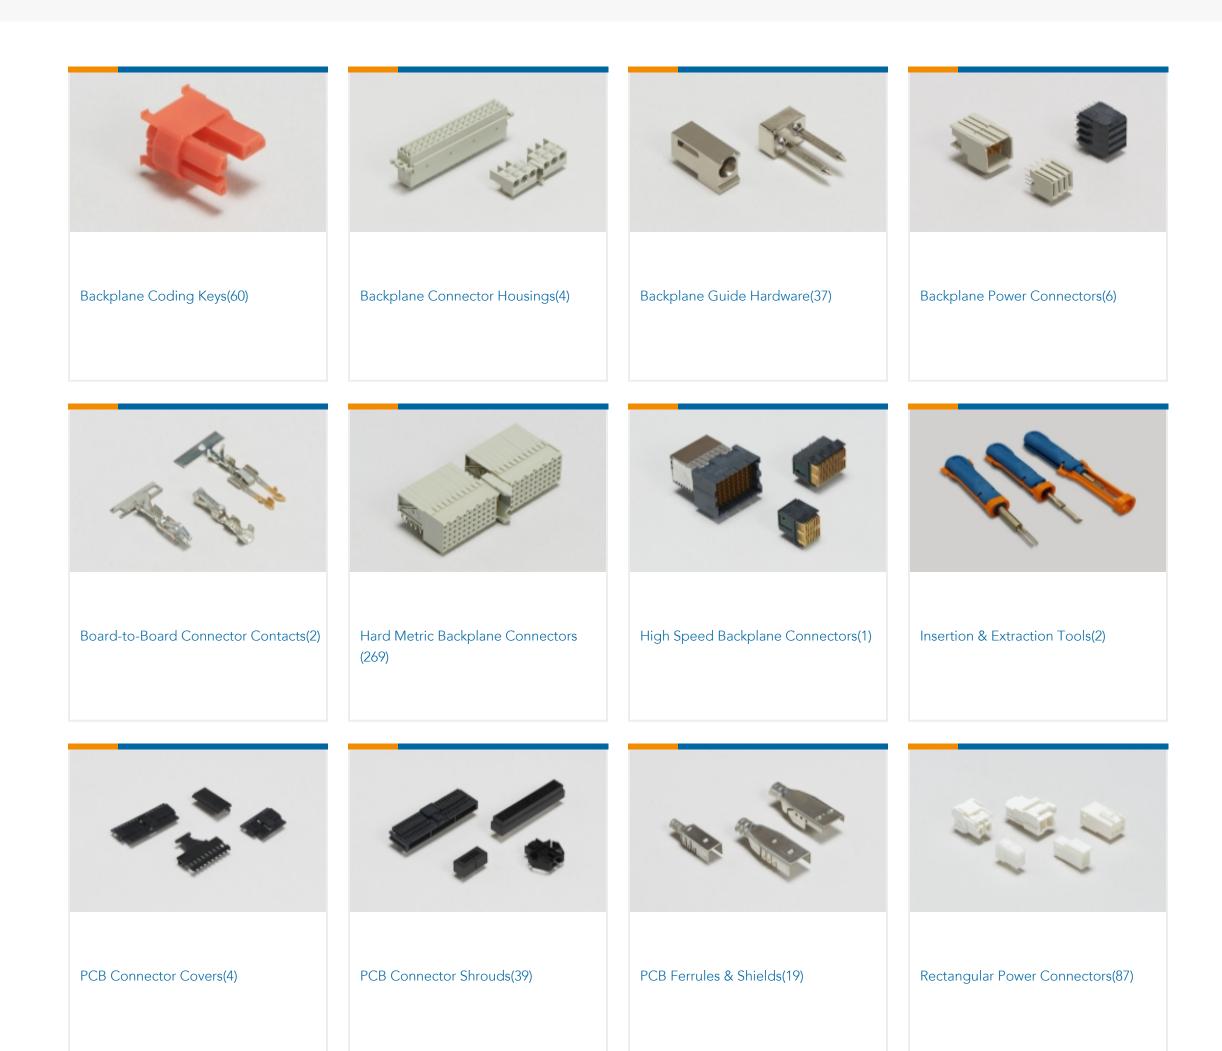

# Customers Also Bought

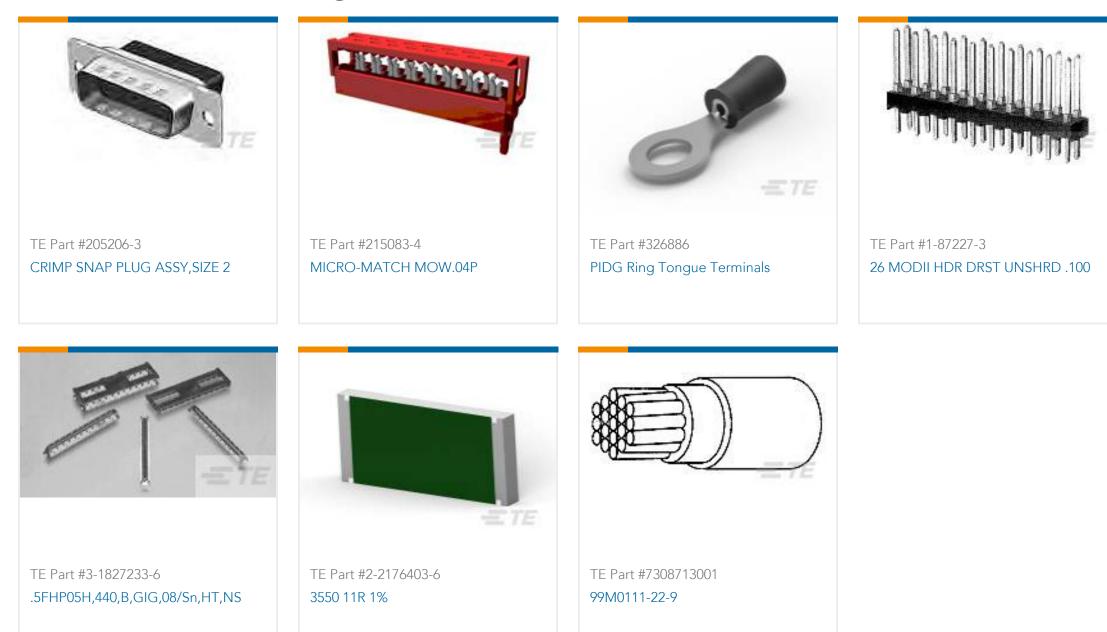

# Documents

**C** For support call+1 800 522 6752

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 22 Column, 5 Row, Mezzanine, 110 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Product Drawings Z-PACK/B22 VF 110P

English

**CAD** Files

Customer View Model ENG\_CVM\_CVM\_5352268-1\_A.2d\_dxf.zip

English

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_5352268-1\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_5352268-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Product Environmental Compliance MD\_5352268-1\_09172011938

English

MD\_5352268-1\_09172011938

English