

CTMPC100804F Series

From 0.24 μH to 2.2 μH

SPECIFICATIONS


Isat: DC current (A) that will cause L to drop approximately 30%.
 Irms: DC current (A) that will cause an approximate ΔT of 40°C.

Part Number	Inductance (μH)	L Test Freq. (MHz)	DCR Max. (m Ω)	Isat Max. (A)	Irms Max. (A)
CTMPC100804F-R24M	0.24	2.0	40	7.5	4.5
CTMPC100804F-R47M	0.47	2.0	46	5.2	3.1
CTMPC100804F-R68M	0.68	2.0	65	3.8	2.9
CTMPC100804F-1R0M	1.0	2.0	78	3.4	2.5
CTMPC100804F-1R5M	1.5	2.0	105	3.2	2.2
CTMPC100804F-2R2M	2.2	2.0	156	2.6	1.4



PHYSICAL DIMENSIONS

Size	A	B	C	D
mm	2.5 ± 0.2	2.0 ± 0.2	1.0	0.6 ± 0.2
inches	0.098 ± 0.008	0.079 ± 0.008	0.039	0.024 ± 0.008

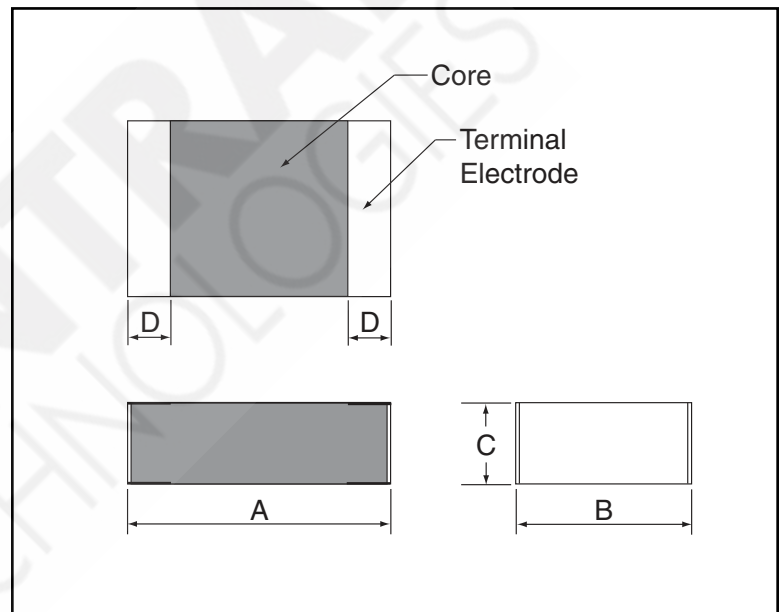

CHARACTERISTICS

Description: SMD Shielded Molded Power Inductor
Applications: Smartphone, Tablet PC, Hard Disk for Ultrabook, LTE Module, Portable Devices, etc.
Operating Temperature: -40°C to 125°C (including self-temperature rise)
Inductance Tolerance: ±20%
Testing: Inductance is tested on an E4991A/HP4287A+16197A, 2MHz, 0.2V.
Packaging: Tape and Reel.
Miscellaneous: **RoHS Compliant.**
Additional Information: Additional electrical & physical information available upon request.
Samples available. See website for ordering information.

PAD LAYOUT

