

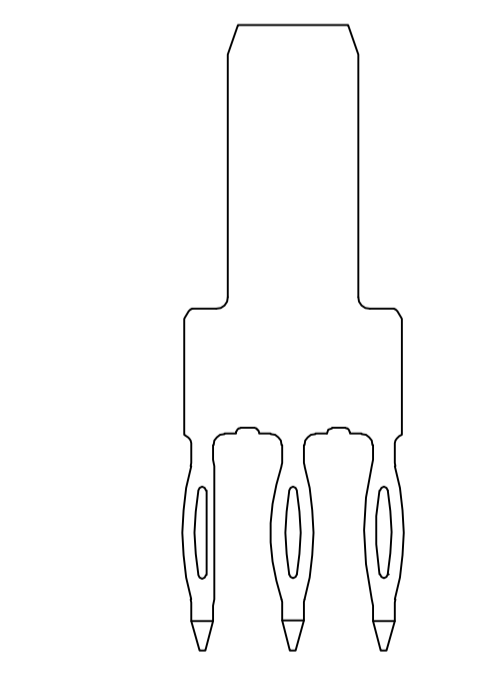


RECOMMENDED CIRCUIT PATTERN
 PER IPC-D300 TYPE II, CLASS C
 (COMPONENT SIDE)

- △ HOUSING MATERIAL: LIQUID CRYSTAL POLYMER.
COLOR: NATURAL.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ CONTACT FINISH:
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
FLASH GOLD PER ASTM B 488, OVER
0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR
0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.
ON LEADS:
0.00127 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.
- △ PART MARKING, LOCATED APPROXIMATELY AS SHOWN.
APPROXIMATELY AS SHOWN.

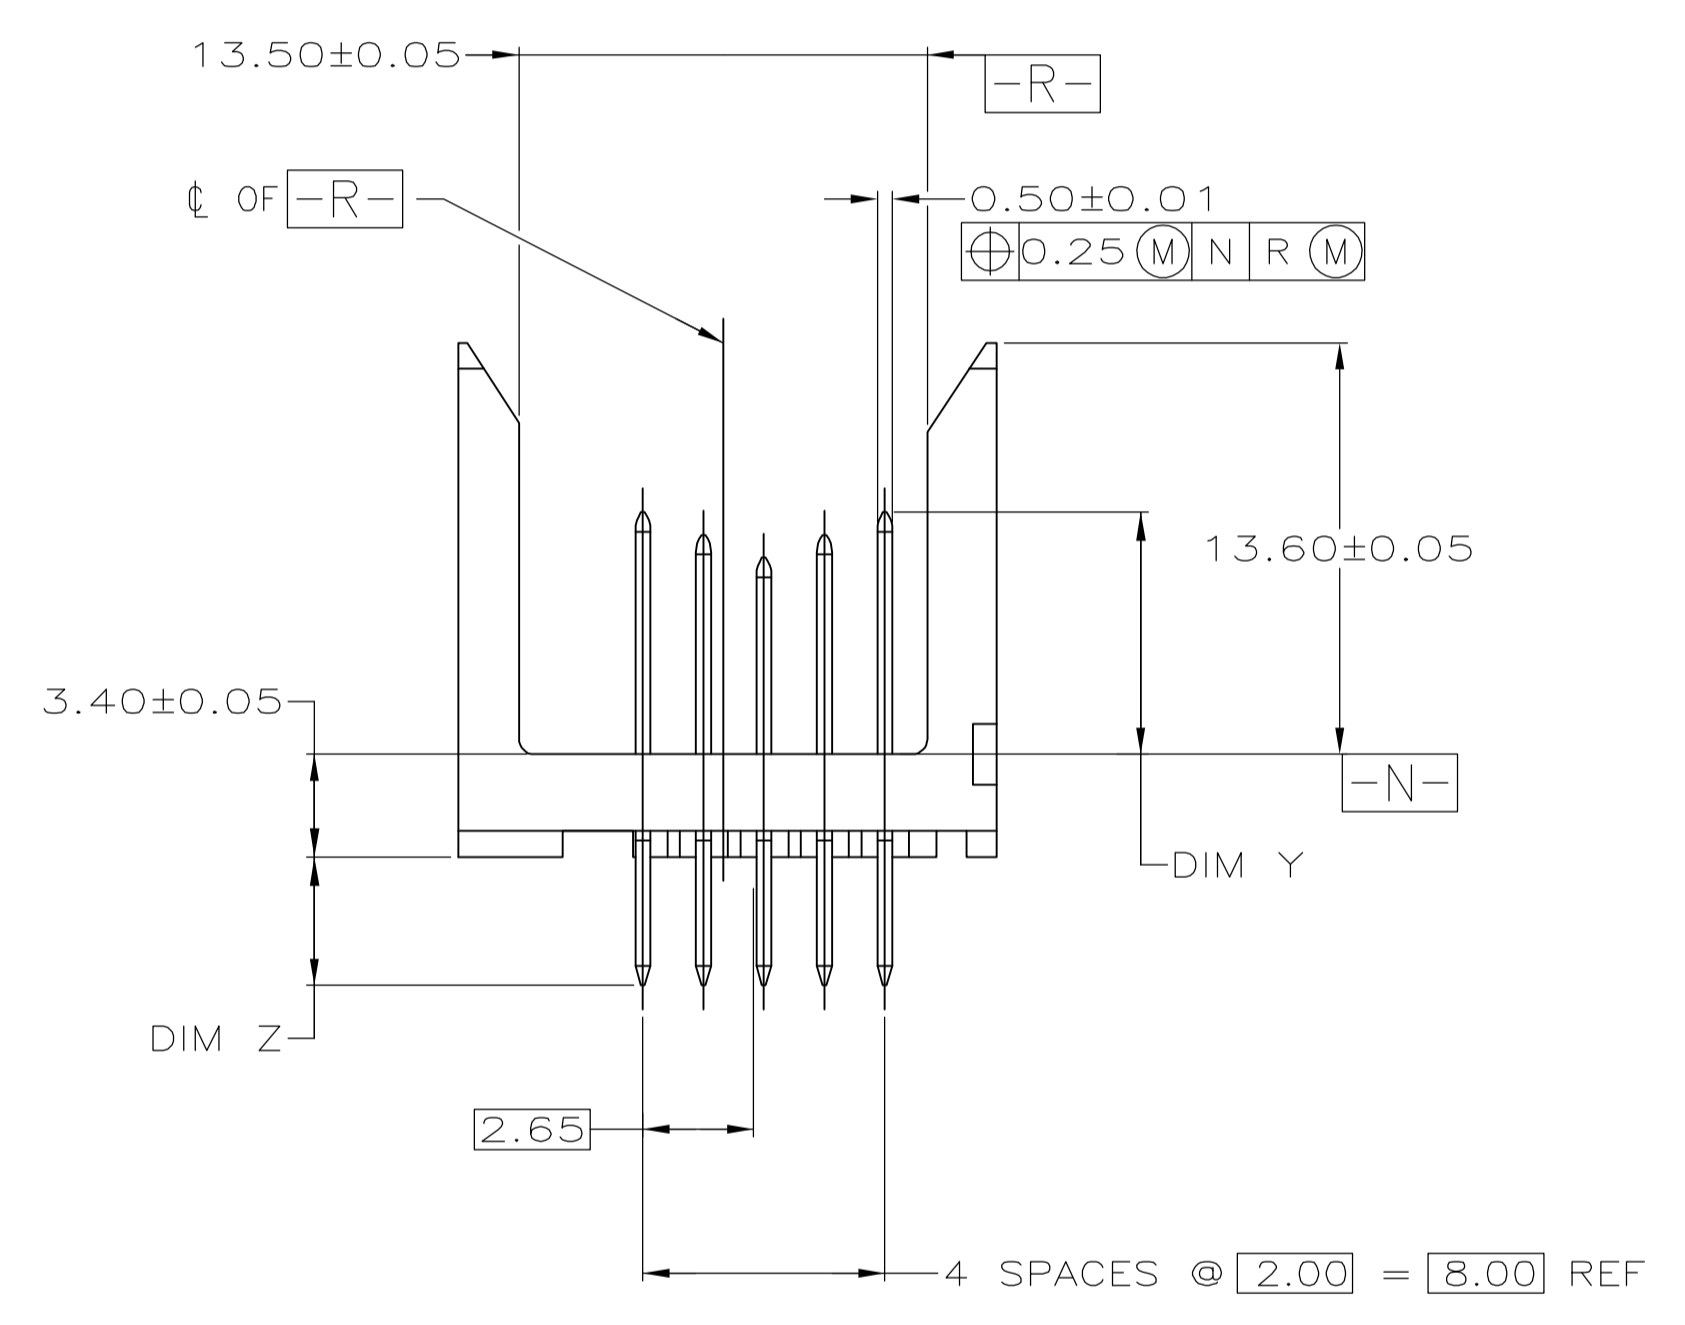

SECTION A-A
 SCALE 6:1

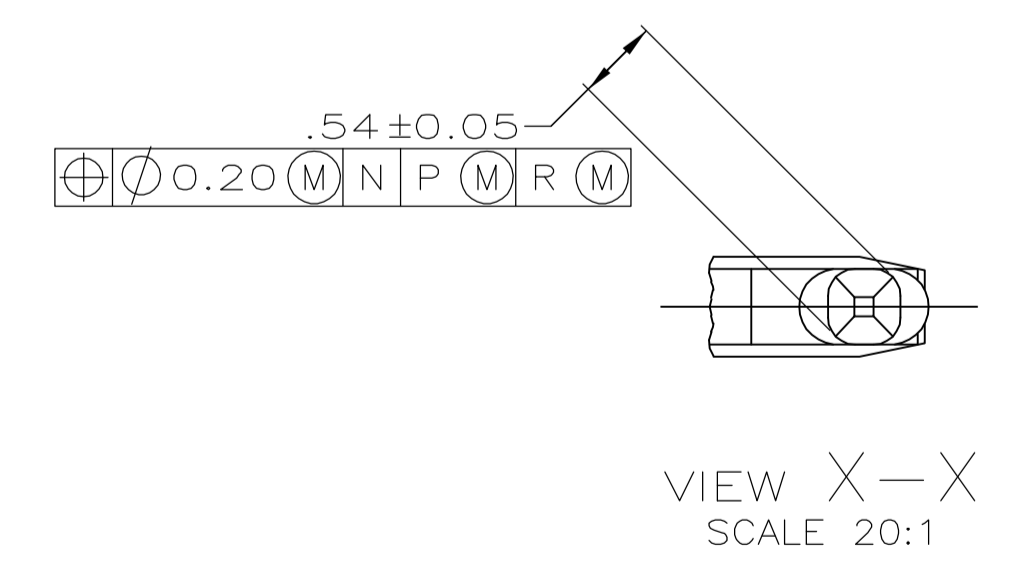

FINISH	5536673-1
PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN	T. SHUEY	4-21-98	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS:		CHK	D. KOVALICK	4-23-98	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		AP'D	D. KOVALICK	4-23-98	NAME PIN ASSY, POWER, VERTICAL, Z-PACK 2mm FB, PRESS FIT LEADS, SEQUENCED BY ROW
mm		PRODUCT SPEC			
0 PLC ± -		APPLICATION SPEC			SIZE
1 PLC ± -		RESTRICTED TO			
2 PLC ± 0.13		SCALE			SHEET 1 OF 1
3 PLC ± -		DRAWING NO			
4 PLC ± -		WEIGHT			REV A
ANGLES ± -		CUSTOMER DRAWING			
FINISH		SCALE 4:1			
MATERIAL		DRAWING NO			
FINISH		WEIGHT			
FINISH		DRAWING NO			
FINISH		WEIGHT			