

SAC-5P-M12MS/30,0-PUR SH - Sensor/actuator cable



1424080

<https://www.phoenixcontact.com/us/products/1424080>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 5-position halogen-free, shielded, Plug straight M12, coding: A, connected with unwired, on free cable end, cable length: 30 m

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1424080 |
| Packing unit | 1 pc |
| Minimum order quantity | 5 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF03 |
| Product key | BF1CKA |
| GTIN | 4055626367651 |
| Weight per piece (including packing) | 1,307 g |
| Weight per piece (excluding packing) | 1,300 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

1424080

<https://www.phoenixcontact.com/us/products/1424080>

Technical data

Product properties

| | |
|----------------------|-----------------------|
| Product type | Sensor/actuator cable |
| Number of positions | 5 |
| Application | Standard |
| No. of cable outlets | 1 |
| Coding | A |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Seal material | NBR |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |

Electrical properties

| | |
|-----------------------|----------------------------|
| Contact resistance | $\leq 5 \text{ m}\Omega$ |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 48 V AC |
| | 60 V DC |
| Nominal current I_N | 4 A |
| Protective circuit | unwired |

Mechanical properties

Mechanical data

| | |
|-----------------------------|------------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|------------|

Signaling

| | |
|------------------------|----|
| Status display | No |
| Status display present | No |

Connection data

Conductor connection

| | |
|-------------------|------------------------|
| Tightening torque | 0.4 Nm (M12 connector) |
|-------------------|------------------------|

Connector

SAC-5P-M12MS/30,0-PUR SH - Sensor/actuator cable



1424080

<https://www.phoenixcontact.com/us/products/1424080>

Connection 1

| | |
|---------------------|-------------------|
| Type | Plug straight M12 |
| Number of positions | 5 |
| Coding type | A |
| Number of positions | 5 |


Connection 2

| | |
|------|----------------|
| Type | free cable end |
|------|----------------|

Cable/line

| | |
|--------------|------|
| Cable length | 30 m |
|--------------|------|

PUR halogen-free black [PUR]

| | |
|---------------------------------|---|
| Dimensional drawing |  |
| Cable weight | 43 kg/km |
| UL AWM Style | 20549 / 10493 (80°C/300 V) |
| Number of positions | 5 |
| Shielded | yes |
| Cable type | PUR halogen-free black [PUR] |
| Conductor structure signal line | 42x 0.10 mm |
| AWG signal line | 22 |
| Conductor cross section | 5x 0.34 mm ² (Signal line) |
| Wire diameter incl. insulation | 1.27 mm ±0.02 mm (Signal line) |
| External cable diameter | 5.25 mm ±0.2 mm |
| Outer sheath, material | PUR |
| External sheath, color | black-gray RAL 7021 |
| Conductor material | Bare Cu litz wires |
| Material wire insulation | PP |
| Single wire, color | brown, white, blue, black, gray |
| Thickness, insulation | ≥ 0.21 mm |
| Thickness, outer sheath | approx. 0.5 mm |
| Overall twist | 5 wires around filler to the core |
| Optical shield covering | 80 % |
| Max. conductor resistance | max. 57 Ω/km (at 20 °C) |
| Insulation resistance | 70 GΩ*km (at 20 °C) |
| Nominal voltage, cable | 300 V (at 20 °C) |
| Test voltage Core/Core | 3000 V (at 20 °C) |

1424080

<https://www.phoenixcontact.com/us/products/1424080>

| | |
|---|---|
| Smallest bending radius, fixed installation | 26 mm |
| Smallest bending radius, movable installation | 52 mm (up to +60 °C) |
| Max. bending cycles | 10000000 |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |
| | in accordance with DIN EN 50267-2-1 |
| Flame resistance | in accordance with UL 758/1581 FT2 |
| | DIN EN 60332-2-2 (20 s) |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |
| Other resistance | Highly resistant to acids, alkaline solutions and solvents |
| | hydrolysis and microbe resistant |
| | Resistant to salt water |
| | partly UV-resistant in accordance with DIN EN ISO 4892-2-A |
| | abrasion-resistant |
| Special properties | Flexible cable conduit capable |
| | Silicone-free |
| | Free of substances which would hinder coating with paint or varnish |
| | Low adhesion surface |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -25 °C ... 80 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|--|
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| | -25 °C ... 80 °C (cable, fixed installation) |
| | -5 °C ... 80 °C (Cable, flexible installation) |


Standards and regulations

M12

| | |
|--------------------------|-----------------|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-101 |

Drawings

Dimensional drawing

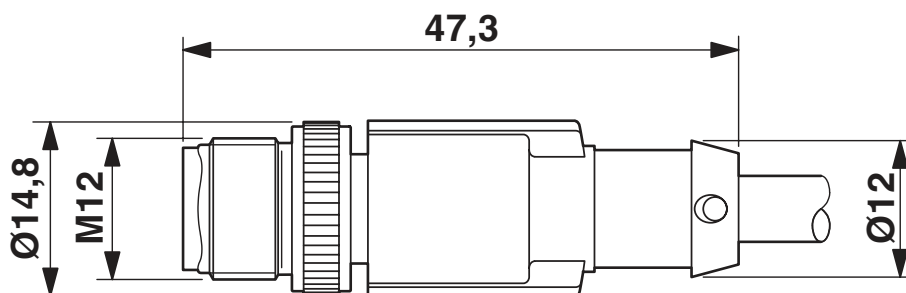


Plug, M12 x 1, straight, shielded

1424080

<https://www.phoenixcontact.com/us/products/1424080>


Diagram

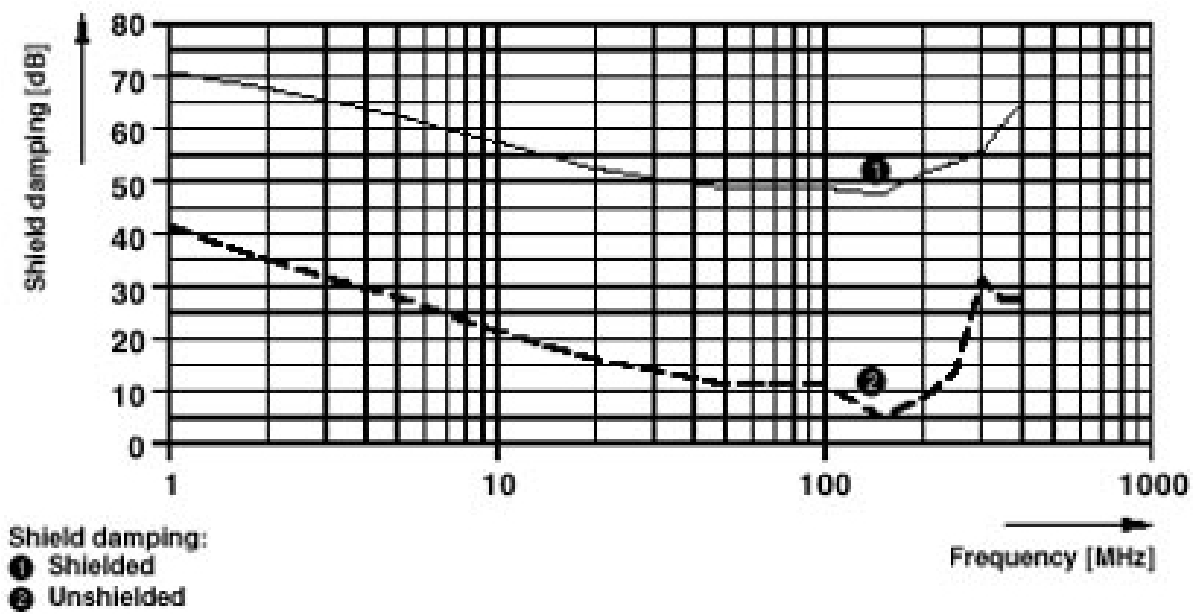

1424080

<https://www.phoenixcontact.com/us/products/1424080>

Schematic diagram

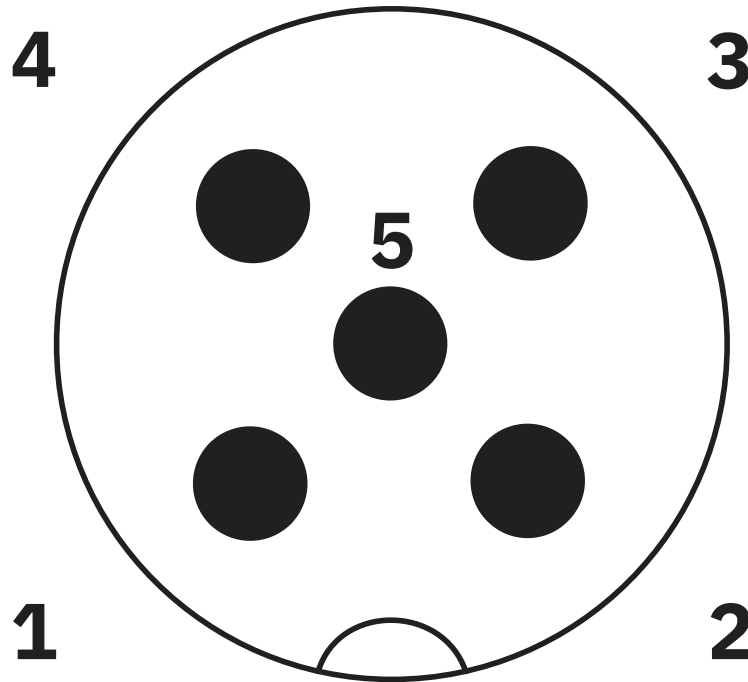

Pin assignment M12 male connector, 5-pos., A-coded, male side

Circuit diagram





1424080

<https://www.phoenixcontact.com/us/products/1424080>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424080>

|  UL Listed Approval ID: FILE E 221474 | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 125 V | 4 A | - | - |

|  cUL Listed Approval ID: FILE E 221474 | | | | |
|---|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 125 V | 4 A | - | - |

| cULus Listed | | | | |
|---------------------|--|--|--|--|
| | | | | |

1424080

<https://www.phoenixcontact.com/us/products/1424080>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC001855 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

SAC-5P-M12MS/30,0-PUR SH - Sensor/actuator cable



1424080

<https://www.phoenixcontact.com/us/products/1424080>

Environmental product compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com