


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
F2		NEW DRAWING PER ECO-11-019045	03APR12	KH	DR
F3		REVISED PER ECO-17-007400	29NOV2017	RS	DR

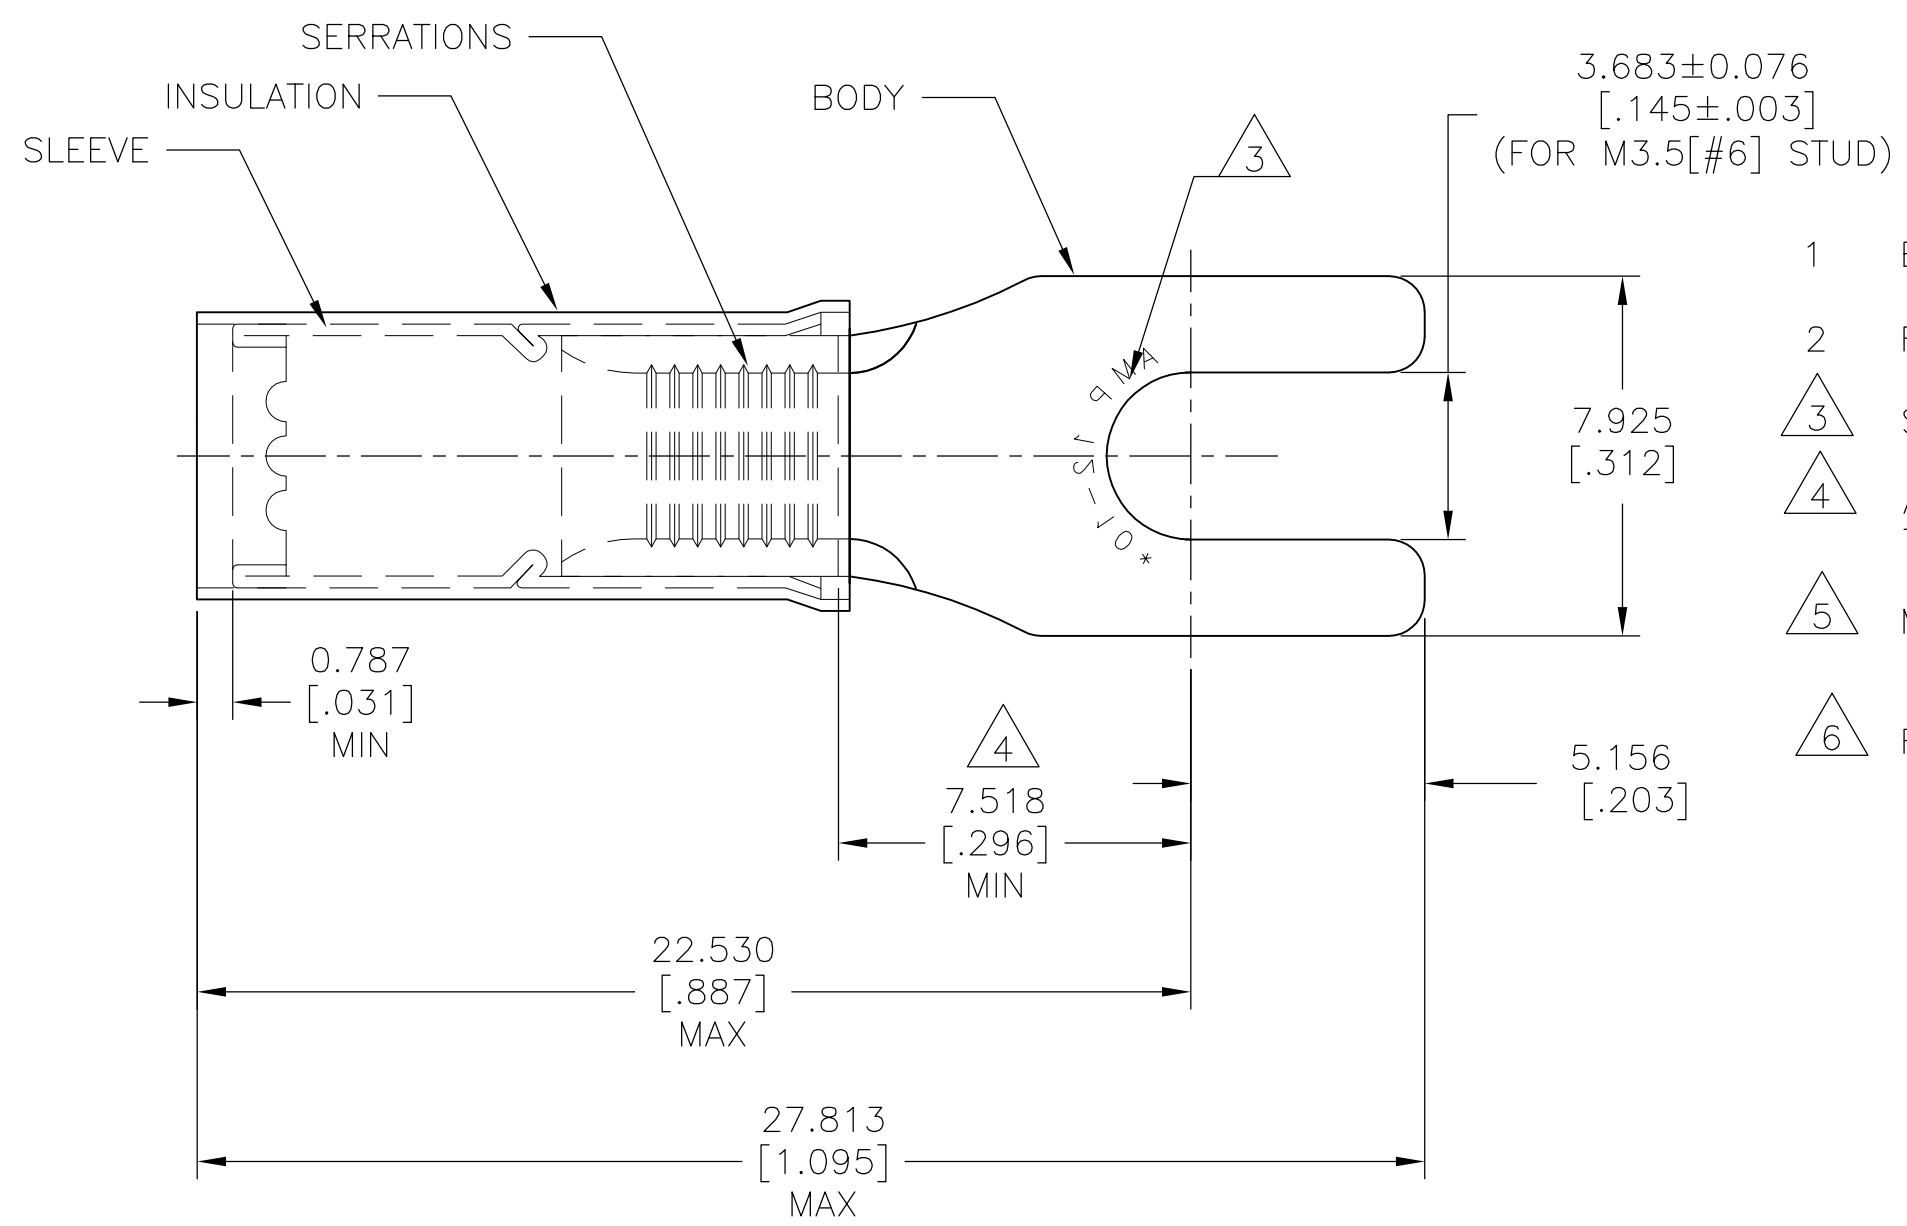

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

- 1 BODY MATERIAL THK: 1.016±0.051[.040±.002]
- 2 FOR WIRE INSULATION: ϕ 3.810-5.842[ϕ .150-.230]
- 3 STAMP AMP 12-10* APPROX AS SHOWN,
- 4 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD.
- 5 MATERIAL: BODY & SLEEVE: COPPER PER ASTM B152. INSULATION : NYLON
- 6 FINISH: BODY & SLEEVE: TIN PLATE PER ASTM B545. INSULATION: COLOR-YELLOW.

2500	ON TAPE REEL	2-326859-1
500	LOOSE PIECE	326859
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS: PRODUCT INFORMATION CENTER 1-800-522-6752

FOR APPLICATION TOOLING INFORMATION: TOOLING ASSISTANCE CENTER 1-800-722-1111

FOR ORDER ENTRY: 1-800-526-5142

RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]

VOLTAGE RATING: 300V MAX

WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm² [5,180-13,100] CIR.MIL SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± 0.127[.005]
4 PLC ANGLES	± - ±5°

MATERIAL:

FINISH:

DWN: KIRAN HOLAL 03APR12
 CHK: ROHDE DANIEL 03APR12
 APVD: ROHDE DANIEL 03APR12

NAME: WIRE TERMINAL P.I.D.G-SPADE, WIRE SIZE 12-10

PRODUCT SPEC: UL 486 A-B

APPLICATION SPEC: 114-2157

WEIGHT: -

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-326859 RESTRICTED TO: -

CUSTOMER DRAWING SCALE: 6:1 SHEET: 1 OF 1 REV: F3