




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	APR14/20	L.CHAN



ISOMETRIC VIEW
(SCALE 1:2)

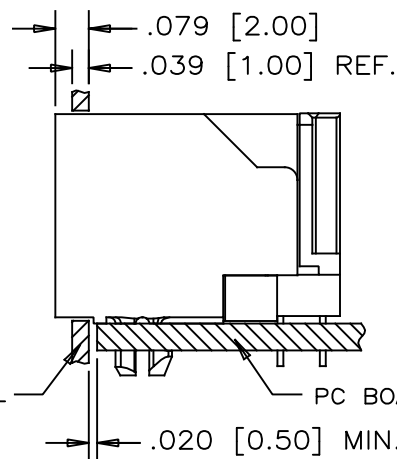

RECOMMENDED PANEL CUTOUT

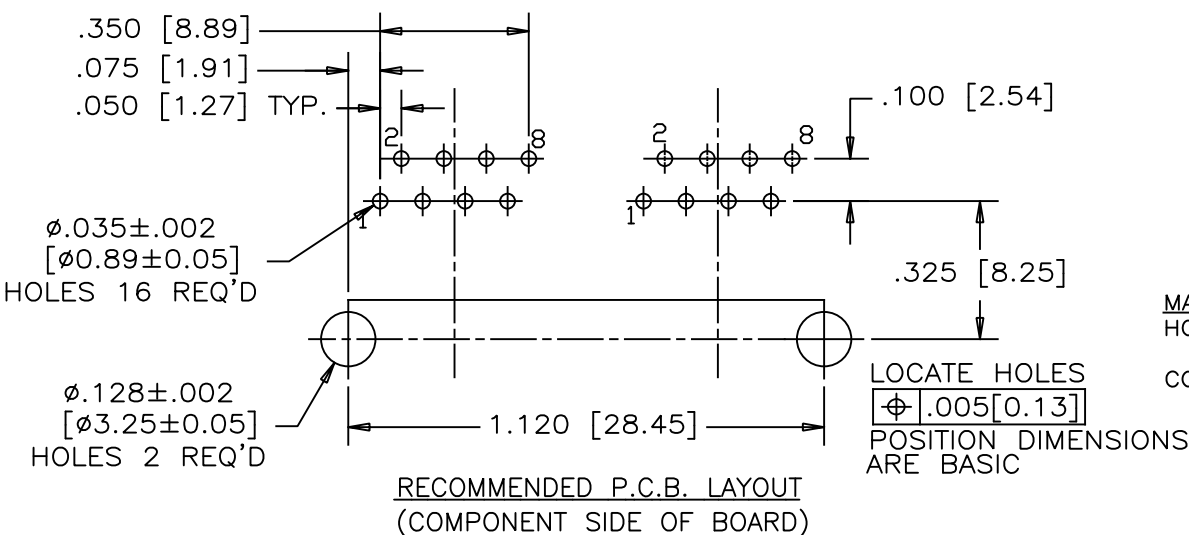

MATERIALS:

HOUSING: ENGINEERING THERMOPLASTIC, FLAMMABILITY RATING UL 94V-0, COLOR: BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACE, SEE PART NO. FOR THICKNESS.
50μ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100μ" [2.54 MICRONS] MIN. MATTE-TIN OR GOLD FLASH ON CONTACT TAILS.


RECOMMENDED SOLDERING TEMPERATURE:

WAVE SOLDERING AT 260° MAXIMUM FOR 5~8 SECONDS.

AMPHENOL PART NUMBER: RJSBE-X080-C2

GOLD PLATING OPTIONS:

- D= 6μ" GOLD PLATING
- G= 15μ" GOLD PLATING
- J= 30μ" GOLD PLATING
- 5= 50μ" GOLD PLATING

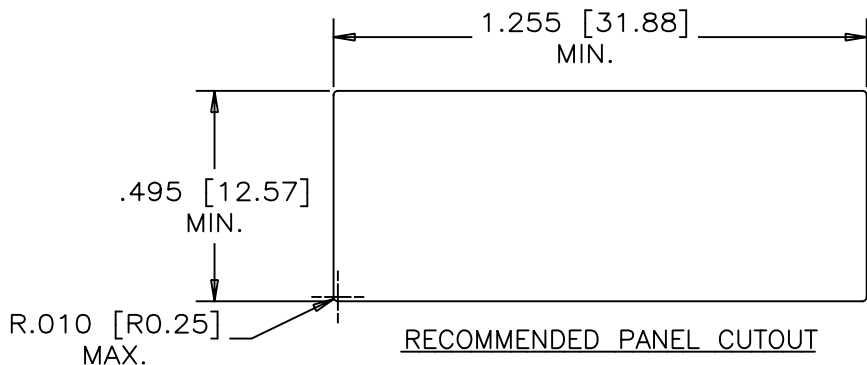

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	APR14/20	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCHES	CHECKED KELVIN.T	APR14/20	
SECONDARY MILLIMETERS	M.E. APP'D		TWO PORTS MODULAR JACK, 8 POSITION, 8 CONTACTS, UNSHIELDED GOLD PLATING OPTION, WITHOUT LED -ROHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		DWG NO. P-RJSBE-X080-C2
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		REV A
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	
ANGULAR DEGREES ±1.5°			CODE ID NO. 03554 DWG SIZE X SCALE 1:1 SHEET 1 OF 1