







DO NOT SCALE
DIMENSIONS IN mm

METRIC



NOTES:

- ① FOR USE ON STANDARD APPLICATORS (RIGHT- LEFT FEED).
- ② FOR USE ON MINIATURE APPLICATORS (LEFT- RIGHT FEED)
- ③ OBSOLETE

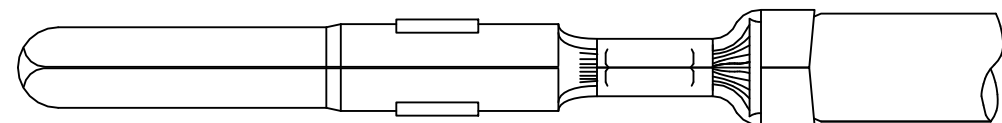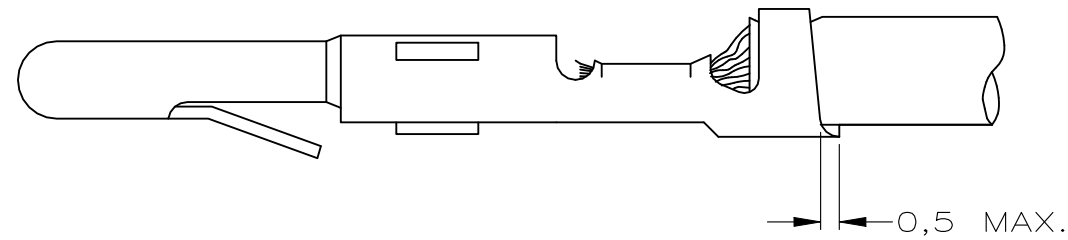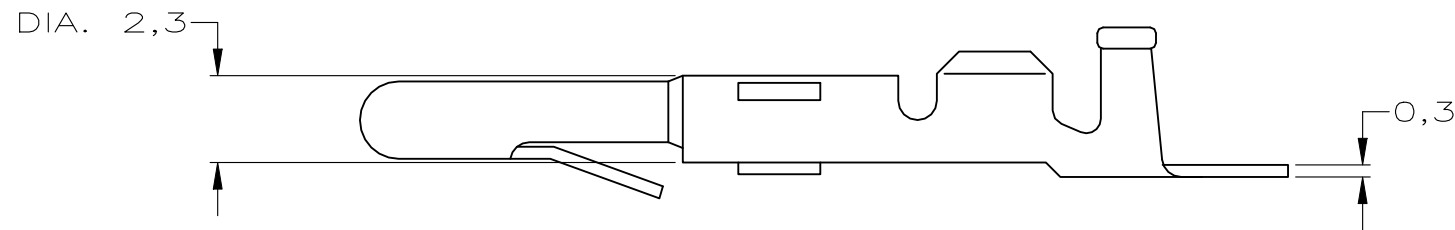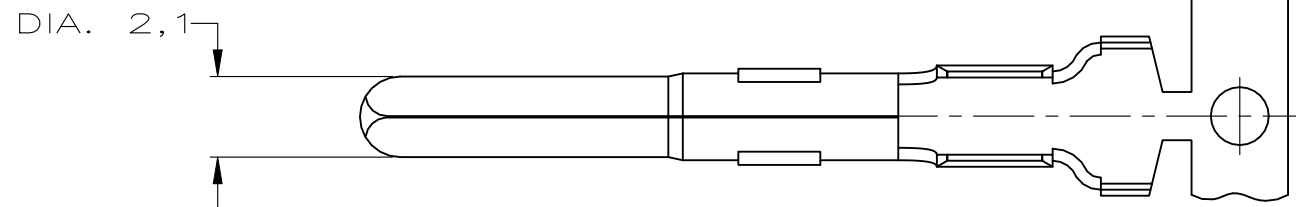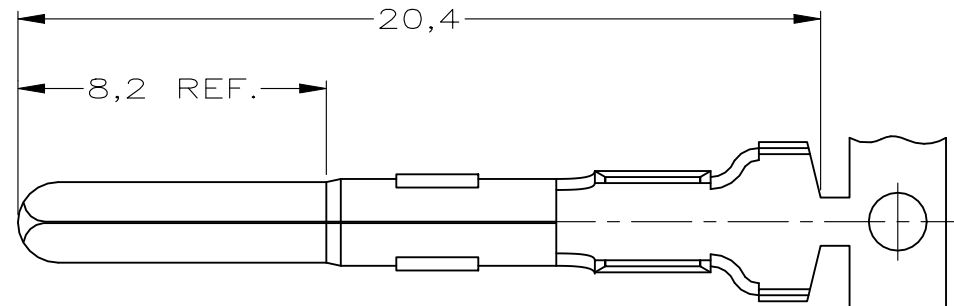

WIRE RANGE :
0,3-0,75mm
INSULATION RANGE :
1,4-2,4 DIA.

NOTES	PLATING	MATERIAL	PARTNUMBER
②	PRE-TINPLATED	PHOSPHOR BR.	163555-8
②	UNPLATED	PHOSPHOR BR.	163555-7
②	PRE-TINPLATED	BRASS	163555-6
②	UNPLATED	BRASS	163555-5
①	PRE-TINPLATED	PHOSPHOR BR.	163555-4
①	UNPLATED	PHOSPHOR BR.	163555-3
①	PRE-TINPLATED	BRASS	163555-2
①	UNPLATED	BRASS	163555-1

CUSTOMER DRAWING					FOR REFERENCE ONLY WILL NOT BE UPDATED	
© COPYRIGHT 19 - BY AMP HOLLAND B.V.					ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.	
THIS DRAWING IS UNPUBLISHED					RELEASED FOR PUBLICATION	
AMP			AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.			
PIN MATE-N-LOK.						
LTR.	REVISION RECORD		DR.	CHK.	DATE	
DR.:	J.v.LIEMPT	CHK.:	A.BIJNEN.	APP.:	M.v.DRIEL	DWG.No.
DATE:	24 OCT 96	DATE:	-	DATE:	-	C-163555
			REV.LTR.		SHEET	
			B2		1 OF 1	
					A3	