


# Automotive FLEX SUPPRESSOR Kit

## Sample Kit Contents

KEMET Part Number	Series	Thickness	Tape Thickness	Effective Frequency	Specific Gravity	Surface Resistivity	Approved Standard	Quantity
		mm	mm	GHz	Typical	$\Omega$ /sq. Typical		
FF1(100)-80X80T0800	FF1	0.1	0.03	1 MHz to 3 GHz	3.1	$1.0 \times 10^6$	UL94 V-0	2
FF1(200)-80X80T0800		0.2					UL File No. E176124	2
FF1(300)-80X80T0800		0.3					2	
EFF4(01)-80X80T0800	EFF4	0.1	0.03	1 MHz to 3 GHz	3.7	$1.0 \times 10^6$	UL94 V-0	2
EFF4(02)-80X80T0800		0.2					UL File No. E176124	2
EFF4(03)-80X80T0800		0.3					2	
EFF4(05)-80X80T0800		0.5					2	

### FF1

Permeability 100  $\mu$  typical, at 3 MHz

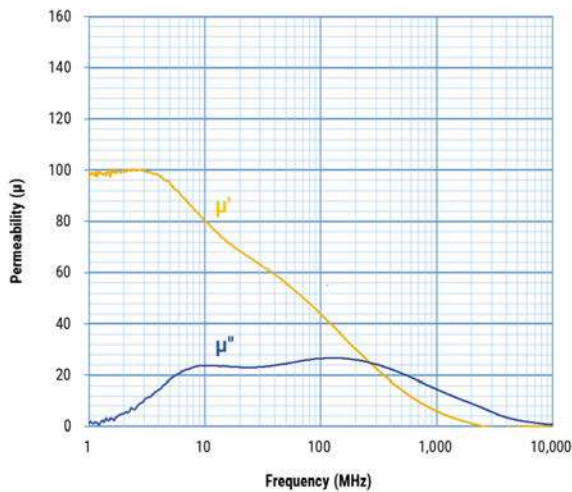

### EFF4

Permeability 140  $\mu$  typical, at 3 MHz

