
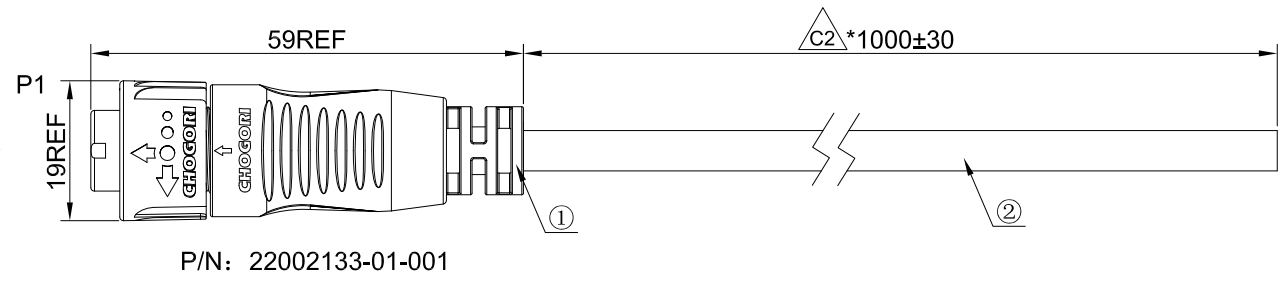


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.

1		2		3		4		5		6		7		8	
CUSTOMER No. :		REV. :		CATEGORY		IN LINE WITH THE TYPE		PAGE	REV. :	ECN&ECR No.	DESCRIPTION		DSN	DATE	
						YES	NO								
				NEW ENERGY VEHICLE PRODUCTS			√		C1	NA	Initial Drawing		XU	2022.05.23	
				INDUSTRIAL PRODUCTS		√		1	C2	NA	Change The Length To 1000mm		XU	2022.06.24	
				RoHS		√									
				REACH			√								
				Halogen-Free			√								
				CALIFORNIA 65			√								



- SPECIFICATIONS:**
- 1.INSULATION RESISTANCE: 10MΩ@500VDC/0.01S.
  - 2.VOLTAGE RATING: 300V.
  - 3.CURRENT RATING: 10A.
  - 4.OPERATION TEMPERATURE: -40℃~+80℃.
  - 5.WATERPROOF IPX7(MATED).
  - 6.RoHS COMPLIANT.

<b>C2</b>	2	900-00201-00049	1.06	M	UL2464 2*18AWG VW-1 PVC -40~80℃ 300V BLACK OD5.5
	1	22002133-01-001	1	PC	STANDARD SERIES 2PIN MALE CONNECTOR WITH MALE PIN(4 LOCKS,MOLDING,-501)
ITEM	PART NO		QTY	UNIT	DESCRIPTION

**MATERIAL OF BILL**

UNIT: mm		DESCRIPTION: STANDARD SERIES 2PIN MALE CONNECTOR WITH MALE PIN(4 LOCKS,MOLDING,-501) L= 1000MM			
未注线性和角度尺寸公差 UNSPECIFIED TOLERANCE		SCALE: 1:1	SHEET: 1 OF 1		
GB/T 1804-M	REV.: C2	SIZE: A4	ASME Y14.5-2009		

**CHOGORI**<sup>®</sup>  
深圳乔合里科技股份有限公司

PART No.:	11C03622051301		DRAWN BY:	XU	TECHNICS:	
MATERIAL:			PROOFREAD BY:	Kevin	QUALITY:	
MOLD No.:			CHECKED BY:		APPROVED BY:	
			STANDARDISATION:			

A B C D E F