

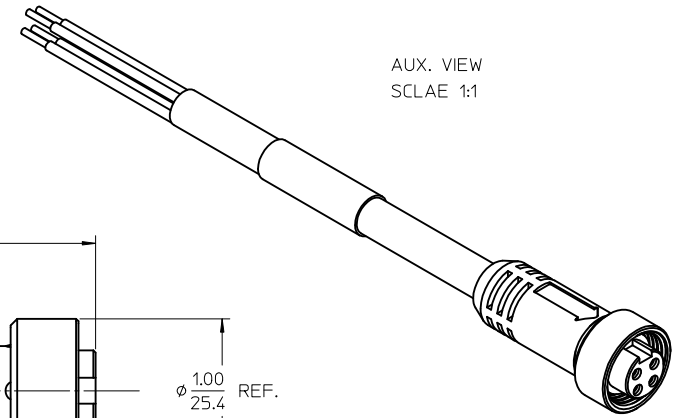


PART NUMBER	ENGINEERING NO.	LENGTH
848569113	84856-9113	3.28' +2.19" - 0 [1.0M +55.6mm - 0]
848569114	84856-9114	16.40' +6.50" - 0 [5.0M +165.1mm - 0]
848569115	84856-9115	32.80' +12.50" - 0 [10.0M +317.5mm - 0]

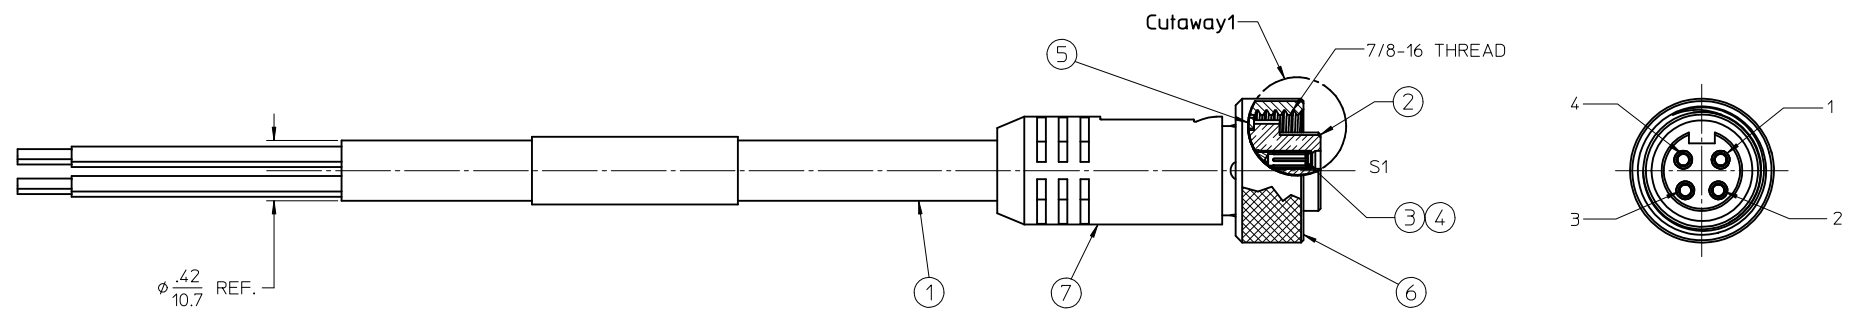

AUX. VIEW
SCLAE 1:1

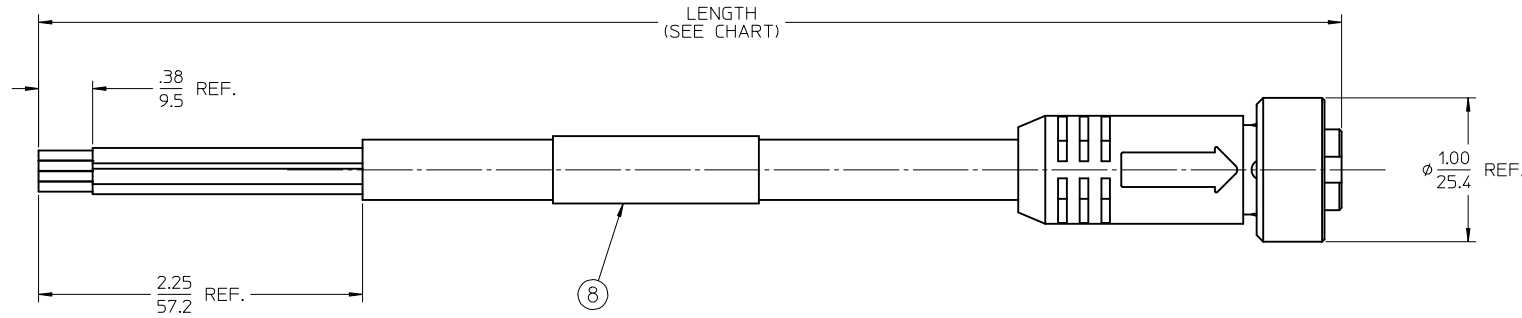

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE ASSEMBLIES ARE BAGGED SEPARATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 5. MATES WITH: MINI CHANGE, A-SIZE 4 POLE RECEPTACLE
 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 10 AMPS
 7. ASSEMBLY IS RoHS COMPLIANT

S1	
1	BLACK
2	WHITE
3	RED
4	GREEN/YELLOW

WIRING DIAGRAM

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	1	OVERMOLD	PVC	YELLOW
6	1	COUPLING NUT	BRASS	NICKEL PLATED
5	1	FRICION RING	NYLON	WHITE
4	4	SOCKET SLEEVE	ST. STEEL	
3	4	CONTACT SOCKET	BRASS	GOLD PLATED
2	1	INSERT, FEMALE, 4 POLE	PVC	YELLOW
1	1	CABLE, 16/4	PVC JACKET	YELLOW

RELEASED EC NO: WNA2010-0686 DRAWN:WOODMAN 2010/05/13 CHKD:VOU 2010/05/14 APPR:JFMURPHY 2010/05/19	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1.5:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± .01 1 PLACE ± 0.3 ± ---	mm INCH	DRAWN BY R.STONE	DATE 2010/01/06	MINI-CHANGE 4 POLE FEMALE, STRAIGHT			
		ANGULAR ±1/2°		CHECKED BY B.WOODMAN	DATE 2010/01/15	MOLEX INCORPORATED			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY JFMURPHY	DATE 2010/01/22	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-84856-008	SHEET NO. 1 OF 1	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION