
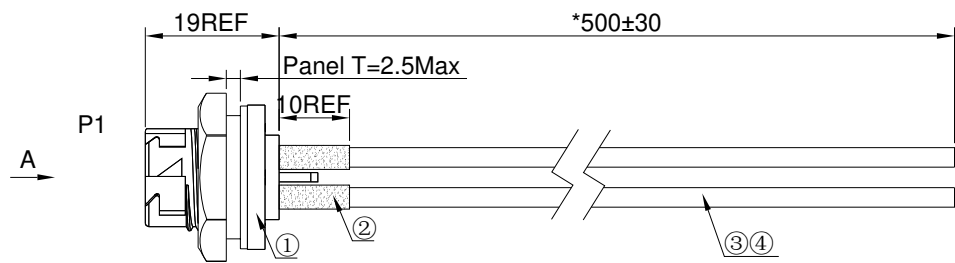



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.

1	2	3	4	5	6	7	8		
CUSTOMER No. :	REV. :	CATEGORY	IN LINE WITH THE TYPE	PAGE	REV. :	ECN&ECR No.	DESCRIPTION	DSN	DATE
			YES NO		C1	NA	Initial Drawing	XJ	2022.07.18
		NEW ENERGY VEHICLE PRODUCTS							
		INDUSTRIAL PRODUCTS	√						
		RoHS	√						
		REACH							
		Halogen-Free							
		CALIFORNIA 65							



- SPECIFICATIONS:**
- INSULATION RESISTANCE : 10MΩ@500VDC/0.01S.
 - VOLTAGE RATING : 600V.
 - CURRENT RATING : 10A.
 - OPERATION TEMPERATURE : -10℃~+105℃.
 - WATERPROOF IPX7(MATED).
 - RoHS COMPLIANT.

4	900-00101-00087	A/C	M	UL1015 18AWG PVC 105℃ 600V RED OD2.8
3	900-00101-00032	A/C	M	UL1015 18AWG PVC 105℃ 600V BLACK OD2.8
2	504-00049-00	A/C	M	ADHESIVE HEAT SHRINK TUBE OD3.2
1	22002635-01	1	PC	STANDARD SERIES 2PIN PANEL MOUNT WITH FEMALE PIN(4 LOCKS -501)
ITEM	PART NO	QTY	UNIT	DESCRIPTION

MATERIAL OF BILL

UNIT: mm	DESCRIPTION: STANDARD SERIES 2PIN PANEL MOUNT WITH FEMALE PIN(4 LOCKS -501) L=500MM
未注线性和角度尺寸公差 UNSPECIFIED TOLERANCE	SCALE: 1:1 SHEET: 1 OF 1
GB/T 1804-M	REV.: C1 SIZE: A4 ASME Y14.5-2009

CHOGORI®
深圳乔合里科技股份有限公司

PART No. : 11C03622051306	DRAWN BY: XU	TECHNICS:
MATERIAL:	PROOFREADED BY: Kevin 2022.08.05 14:00:18 +0800	QUALITY:
MOLD No. :	CHECKED BY:	APPROVED BY: [Signature] 2022.08.05 15:19:10 +0800
	STANDARDISATION:	