


## Pin Assignment

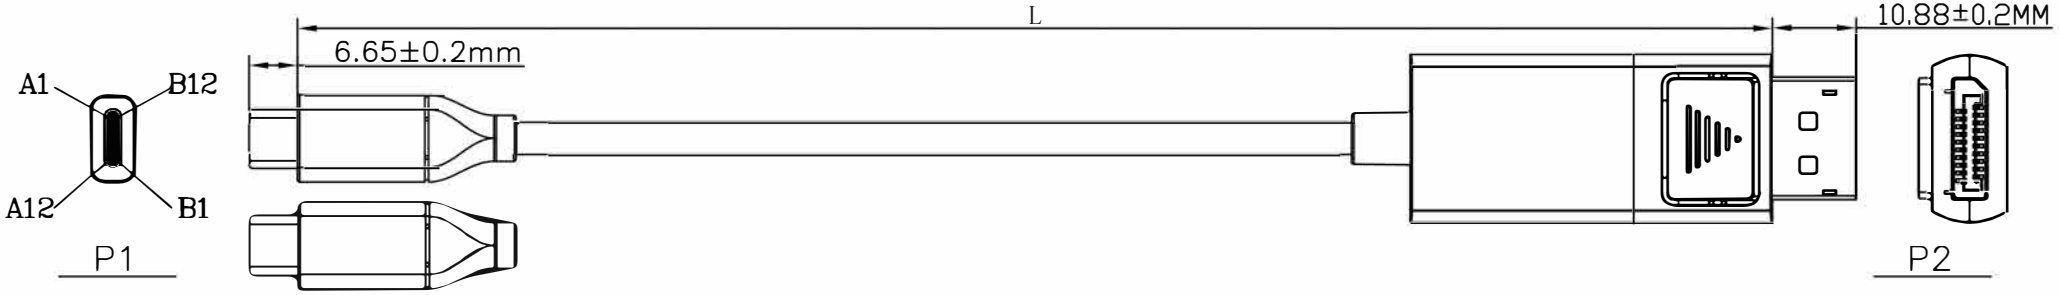


## Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 3 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:300V DC/10ms

| L | P/N |
|---|---|
| 915±20MM | USBC-DP-03F |
| 1830±30MM | USBC-DP-06F |
| 3050±50MM | USBC-DP-10F |

## Resolution: 4K*2K@60Hz
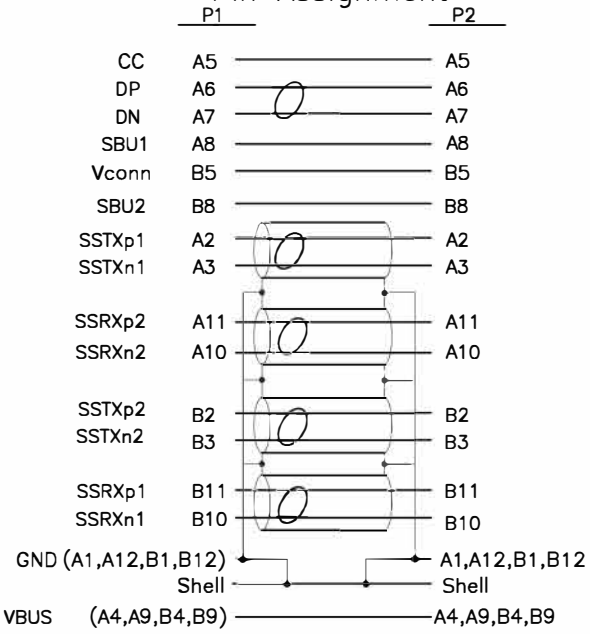
| NO | DESCRIPTION | Q'TY | UNIT |
|---|---|---|---|
| 6 | Transparent PE | 3 | g |
| 5 | 45P PVC Color: Black | 12 | g |
| 4 | DP M ABS SHELL Color: Black | 1 | pcs |
| 3 | USB3.1 C Type Connector With PCB SHELL Gold Plated | 1 | pcs |
| 2 | UTCDP-6FT(VIA) With PCB SHELL Gold Plated | 1 | pcs |
| 1 | USB 3.1 [34AWG(7/0.06TC)+EAM]*4P+32AWG(7/0.08TC)*2C+26AWG(7/0.16TC)*2C+ 32AWG(7/0.08TC)*4C+AB(16/10/0.08 85%TC) OD: 4.2MM Color: Black | L | m |

| TOLERANCE | INCHES | M/M |
|---|---|---|
| .X | .015 | .30 |
| .XX | .010 | .10 |
| .XXX | .005 | .05 |

DRAWN BY
CHECK BY
APPD BY

Unirise

TITLE: USB TYPE C TO DP

CUSTOMER :
CUSTOMER P/N : USBC-DP-XXF

SCALE NONE
UNIT MM
DATE 2018. 05. 04

DRAWING NO.:

REV. A01

1/2