
D.Elfino.Net

Board Revision 1.0 Document Revision 1.0 Feb 22, 2019

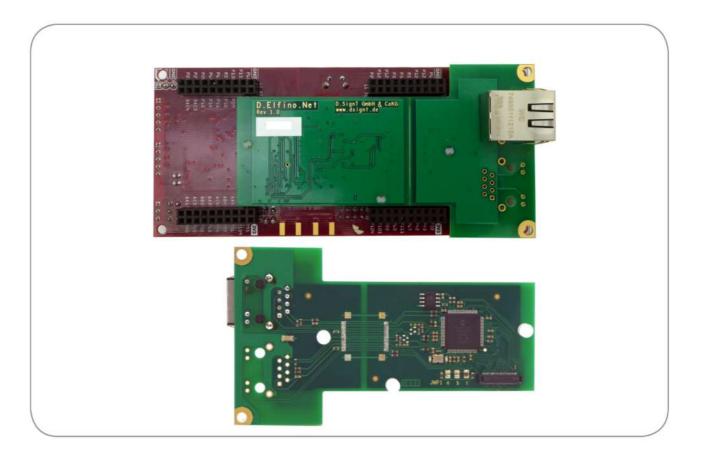

Key Features

- Ethernet add-on card for Texas Instruments Delfino[™] processors
- Fits LaunchPadTM (LAUNCHXL-F28379D) and controlCARD (TMDSCNCD28379D)
- 1 or 2-port 100Base-Tx / 10Base-T with auto MDI/MDIX, optional 100Base-FX fiber ports
- · No additional power supply required
- · 16-bit memory-mapped EMIF interface
- Variable installation options:
 if required, the RJ45 socket part can be separated and extended with FFC / FPC cable
- Highly optimzed TCP/IP stack for C2000[™] real-time control MCUs

D.SignT TCP/IP Stack

The TCP/IP object code library has carefully been tailored to meet the constraints of a DSP system. Code and data memory size have been minimized, and no additional resources like DSP interrupts or timers are required. The TCP/IP protocol stack can be used in a 'bare-metal' C program, just as running as a task in the Texas Instruments DSP/BIOS and SYS/BIOS real-time operating systems.

The TCP/IP stack supports the following protocols:

- ARP Address Resolution Protocol, resolves the IP address to a hardware MAC address. No useraction is required. If an address is unknown, an ARP request is generated automatically.
- IP Internet Protocol. All data transferred by DNS, DHCP, ICMP, UDP and TCP is automatically packed into IP packets.
- ICMP Internet Control Message Protocol. The protocol stack responds to "ping" requests to test a connection.
- UDP User Datagram Protocol. UDP provides a one-to-one or one-to-many connectionless data path. Data transmitted via UDP is not guaranteed to reach it's destination. This protocol has very low overhead and is especially useful for transmitting non-critical data like audio and video data.
- TCP Transmission Control Protocol, provides reliable, connection-oriented, one-to-one connections. All
 data is acknowledged by the receiver and re-transmitted automatically if required. This protocol should
 be used for critical data like software uploads, commands, etc.
- DHCP Dynamic Host Configuration Protocol. This protocol has been developed to ease maintenance
 of a TCP/IP network. A DHCP server manages the allocation of IP addresses and provides additional
 network configuration data like gateways, DNS servers etc. The TCP/IP stack integrates the client
 functions required to obtain an IP address, DNS server, and gateway.
- DNS Domain Name System. This protocol allows to use symbolic host names instead of numerical IP addresses. The TCP/IP stack integrates the client functions to query a DNS server to resolve a host name.

Higher level protocols like SMTP, HTTP or FTP are based on the described protocols, most of them using TCP. The TCP/IP library includes a ready-to-use FTP server, which allows to upload programs and parameters to Flash Memory, or download logs and data files. The FTP server is widely configurable: users, passwords, directories, files, and access restrictions are maintained in a simple data structure. A HTTP server framework is also provided. This framework handles multiple connections and passes GET and POST parameters to a user-defined callback function, hence providing the required flexibility for dynamic data. The DSP can send static HTML pages and images as well as inserting the current value of variables, generate images from data acquisition buffers, etc. on demand. SMTP functionality is provided to send an e-mail, e.g. to periodically send log-files to the system administrator. Finally, a Modbus TCP implementaion is provided for process control.

The TCP/IP software uses a socket architecture, similar to the familiar Berkeley sockets. Following is a description of the function calls implemented:

General Initialization

net_init() initialize sockets

net_set_gateway() configure gateway for connections outside the local IP net.

Socket Configuration

socket_open() open a new socket socket close() close a socket

set_socket_option() specify non-standard socket options, e.g. disable UDP checksum

socekt_define_callback() install a user-defined callback function install_icmp_socket() install a socket and buffer for 'pings'

Send Functions

 net_send()
 non-blocking send function

 net_send_string()
 blocking send function for strings

 net_send_ready()
 blocking send function for binary

Receive Functions

net_recv() non-blocking receive function net_revc_ready() blocking receive function

Miscellaneous Functions

net_isq() main network polling function, must be called periodically in your program's

main loop or from a periodic task.

TCP Connection Functions

connect () establish a connections shutdown () shutdown a connection gethostbyname() host name resolution

accept() test if TCP socket is connected

Ordering Information

D.Elfino.Net-Card Board

DS.D.Elfino.Net Development Package including Board, Support-Software and TCP/IP Stack

development license

QL.D.Elfino.Net small quantity TCP/IP stack license

OL.D.Elfino.Net unlimited OEM license for the TCP/IP stack



D.SignT GmbH & Co. KG

Marktstraße 10 • 47647 Kerken • Germany phone +49 (0)2833 / 570 976 • fax +49 (0)2833 / 3328 info@dsignt.de