



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/01/14	C	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
03/03/17	D	DIM. 200.50 WAS 201.78 DIM. 29.3 WAS 29.0 DIM. 73.8 WAS 73.0	T.B.	B.S.	
03/17/17	E	ADDED SIDE VIEW	T.B.	B.S.	

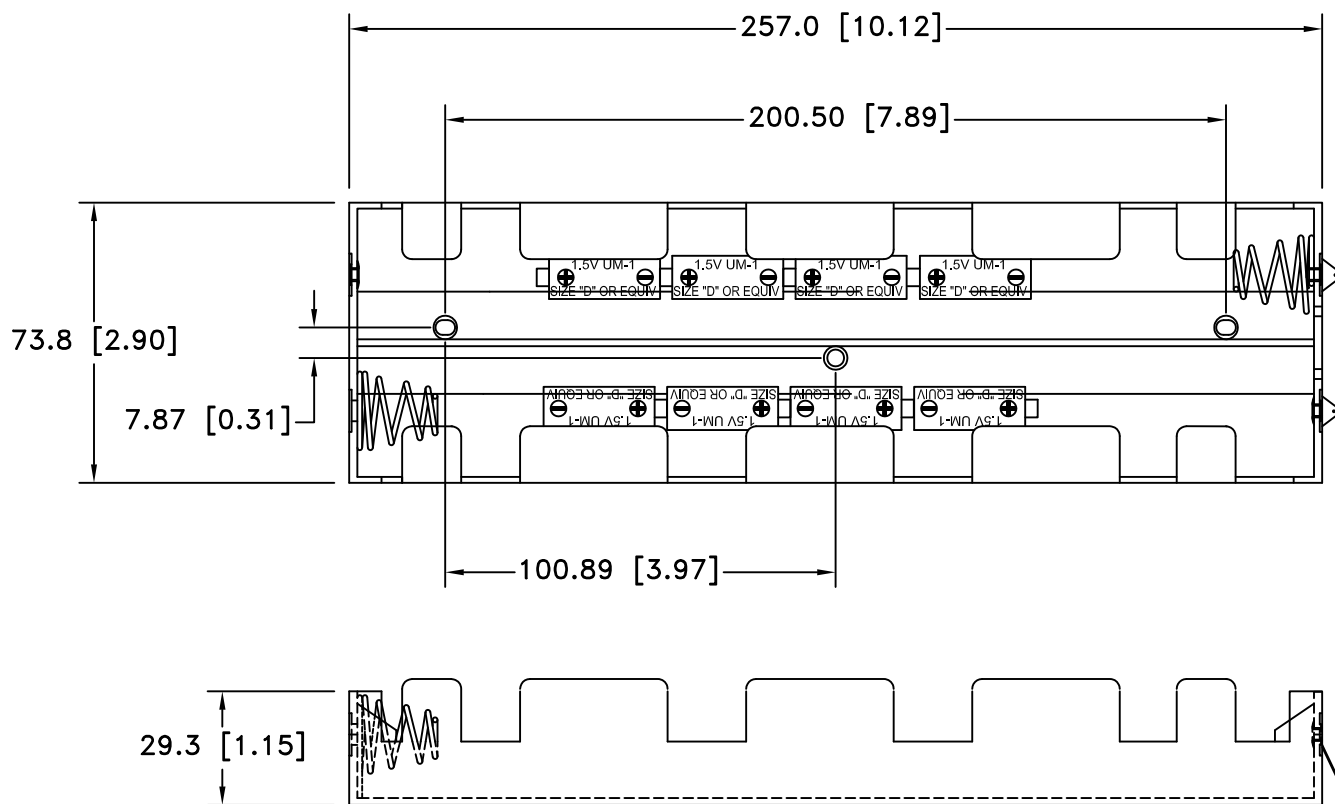


SPECIFICATION:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 RIVETS: BRASS, NICKLE PLTD.
 SPRING: SPRING STEEL, NICKLE PLTD.
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
 ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:

USE 4-40 MACHINE SCREWS OR EYELETS.
 ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title 8 "D" CELL HOLDER WITH SOLDER LUGS		
Fractional ± .8 (.030)		Date 03/17/17	Drawing Number BH28DL
Angular ± 3°			