


**Size: (402 mm x 98 mm x 90 mm)**  
**15.83 x 3.86 x 3.54 inches**

- Features:** cross flow blower
- Operating voltage (VAC):** 120 or 230
- Operating temp:** -40° to 70° C
- Construction:** steel frame with aluminum impeller
- Bearing option:** ball bearing
- Motor:** permanent split capacitor
- Connection:** 22 AWG lead wires
- Protection:** thermal
- Insulation:** Class B

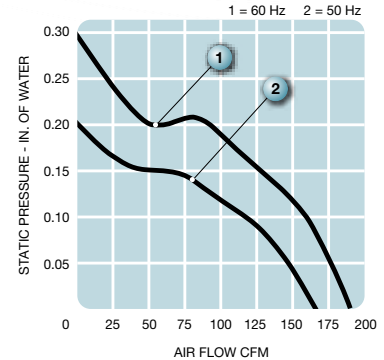

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H <sub>2</sub> O)		Sound Noise dbA	Weight kg
							M <sup>3</sup> /Min.	CFM	MM	INCH		
<b>UF6030CBA12H-L</b>	120	50	35	0.33	0.46	2600	5.0	177	5.0	0.20	50	2.0
	120	60	37	0.33	0.46	3000	5.5	195	7.5	0.30	53	2.0
<b>UF6030CBA23H-L</b>	230	50	35	0.17	0.22	2600	5.0	177	5.0	0.20	50	2.0
	230	60	37	0.17	0.22	3000	5.5	195	7.5	0.30	53	2.0