


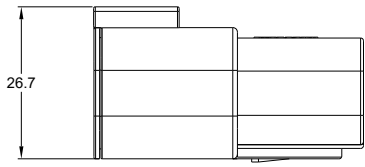
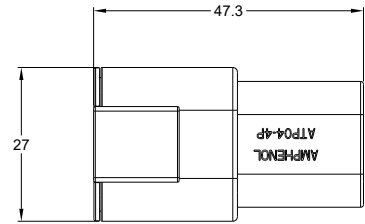





REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A	-	RELEASE	10/SEP/13	DRP	-
B	-	UPDATE SHAPE OF LATCH	07/OCT/20	SULLEN TOMMY	-




REFERENCE DIMENSIONS - ASSEMBLED RECEPTACLE



REFERENCE DIMENSIONS - ASSEMBLED PLUG

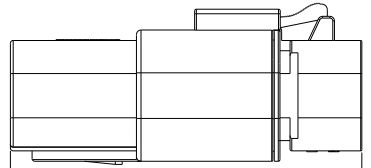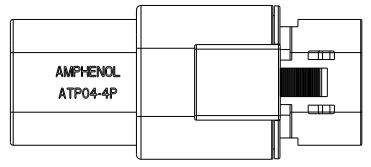

ASSEMBLED PLUG AND RECEPTACLE

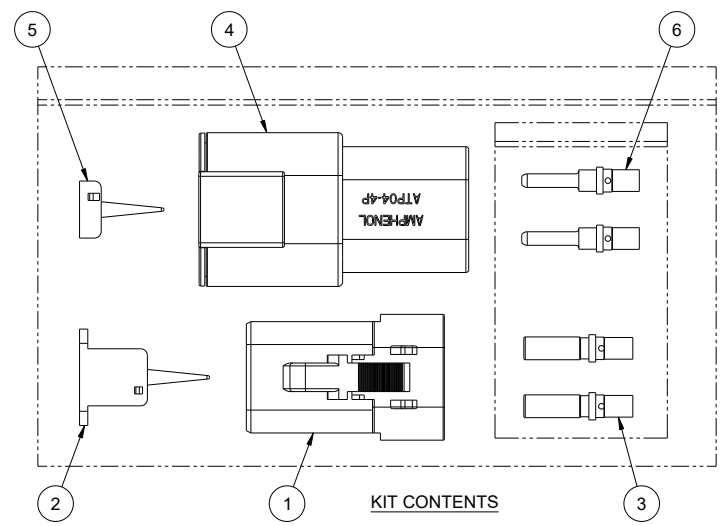

KIT CONTENTS

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
 - HOUSING: THERMOPLASTIC; COLOR: GREY
 - WEDGELock: THERMOPLASTIC; COLOR: ORANGE
 - SEALS: SILICONE RUBBER
 - CONTACTS: COPPER ALLOY; NICKEL PLATED
- SPECIFICATIONS:
 - 2.1 CURRENT RATING: 25 AMPS
 - 2.2 VOLTAGE RATING: 500 V AC/DC (UL1977)
 - 2.3 OPERATING TEMPERATURE: -55°C TO +125°C
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 2500 VOLTS AC.
 - 2.5 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 2.6 CONTACT MILLIVOLT DROP: 60 MILLIVOLT DROP @ 25 AMP TEST CURRENT.
 - 2.7 MOISTURE RESISTANCE: IP68(1M OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION) IP69K(MATED CONDITION)
 - 2.8 CONNECTOR MATING CYCLE DURABILITY: 100 CYCLES

- AVAILABLE HAND CRIMPER: CA-5D12
- ALL COMPONENTS ARE RoHS COMPLIANT.
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

- 6 WIRE RANGE OF CONTACTS INCLUDED IN KIT: 12 - 14 AWG
- 7 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	TYPICAL WIRE RANGE
12	3.40 mm (.134 in)	4.95 mm (.195 in)	10 - 14 AWG (5.0-2.0mm ²)

QTY	PART NUMBER	DESCRIPTION	ITEM
4	AT60-204-12141	CONTACT, PIN, SOLID, SIZE 12, 12- 14 AWG	6
1	AWP-4P	P-WEDGELock, 4 POSITION, ATP SERIES	5
1	ATP04-4P	RECEPTACLE, 4 POSITION, ATP SERIES	4
4	AT62-203-12141	CONTACT, SOCKET, SOLID, SIZE 12, 12- 14 AWG	3
1	AWP-4S	S-WEDGELock, 4 POSITION, ATP SERIES	2
1	ATP08-4S	PLUG, 4 POSITION, ATP SERIES	1

MATERIALS LIST			
QTY	PART NUMBER	DESCRIPTION	ITEM
4	AT60-204-12141	CONTACT, PIN, SOLID, SIZE 12, 12- 14 AWG	6
1	AWP-4P	P-WEDGELock, 4 POSITION, ATP SERIES	5
1	ATP04-4P	RECEPTACLE, 4 POSITION, ATP SERIES	4
4	AT62-203-12141	CONTACT, SOCKET, SOLID, SIZE 12, 12- 14 AWG	3
1	AWP-4S	S-WEDGELock, 4 POSITION, ATP SERIES	2
1	ATP08-4S	PLUG, 4 POSITION, ATP SERIES	1

UNLESS OTHERWISE SPECIFIED:
 1) All dimensions are in millimeters.
 2) Tolerances are as follows:
 1 PL DEC 01.00 1) Precision at 104 Angles at 1
 2 PL DEC 01.00
 3) Note references = 7

CUSTOMER: SILENCE
 APPROVAL: TOMMY XE
 DATE: 07/OCT/20

Amphenol
 Sine Systems - www.amphenol-sine.com
 44724 Morley Drive
 Clinton Township, MI 48036

KIT, ATP SERIES, 4 POSITION PLUG, RECEPTACLE, CONTACTS, AND WEDGELocks

PROCESS SPECIFICATIONS: THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE GRANTED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.

SCALE: NONE

SIZE: C C-
 DWG NO: ATP4PS-CKIT
 SHEET 1 OF 1

TITLE: KIT, ATP SERIES, 4 POSITION PLUG, RECEPTACLE, CONTACTS, AND WEDGELocks
 DWG NO: ATP4PS-CKIT
 REV: B
 SHEET 1 OF 1