




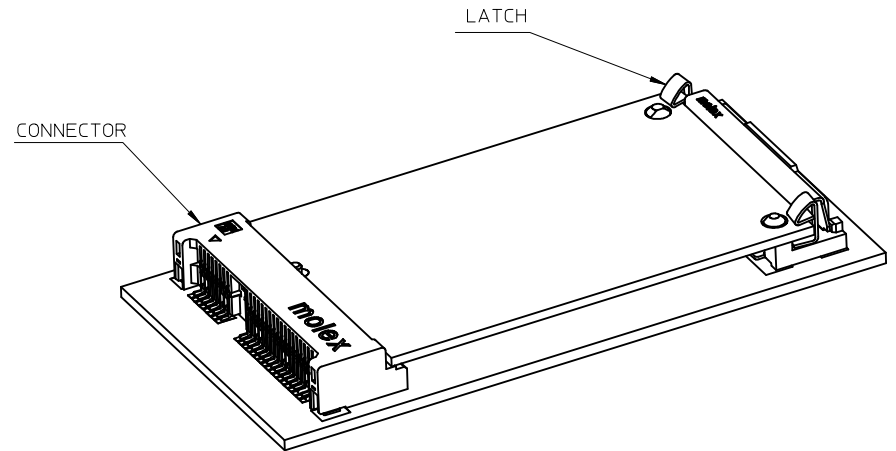

PUSH LATCH TO RELEASE MODULE

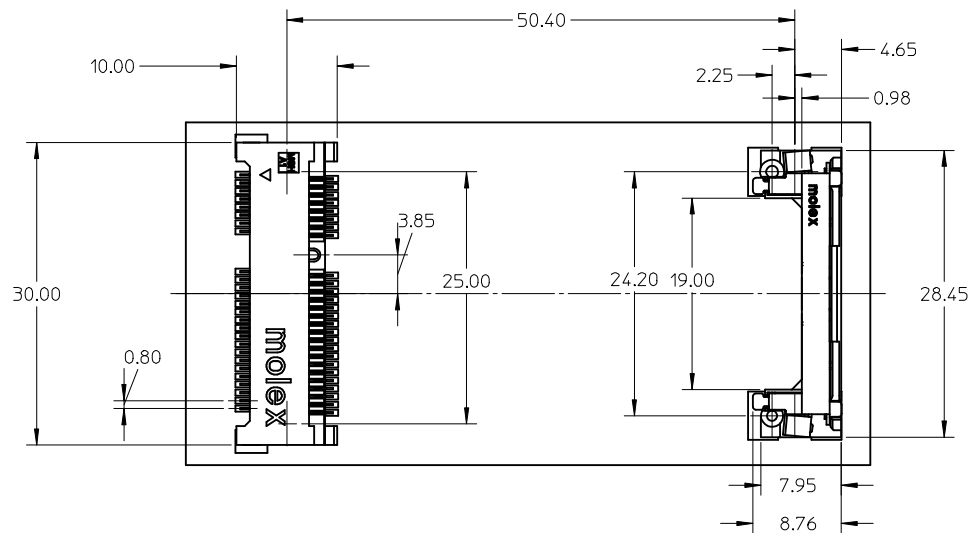

QUALITY
SYMBOLS



SEE SHEET 2
EC NO: S2015-0122
DRAWN: SKANG 2014/08/07
CHKD: BOKOK 2014/08/26
APPR: SILENI 2014/08/26

QUALITY
SYMBOLS
F_A=0
F_G=0
F_P=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± ---
1 PLACE	± 0.25	± ---

ANGULAR ± 3 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
DAVID HU	2005/11/10
CHECKED BY	DATE
HARVEY	2005/11/10
APPROVED BY	DATE
NAGESHKN	2010/04/07

MATERIAL NO.
480994000

SIZE
A3

SCALE
NTS

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION



TITLE
LATCH FOR MINIPCI-E 4.0H
0.8MM PITCH 52 CIRCUIT
WITH COVER LEAD-FREE

MOLEX INCORPORATED

DOCUMENT NO.
SD-48099-400




SHEET NO.
1 OF 3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

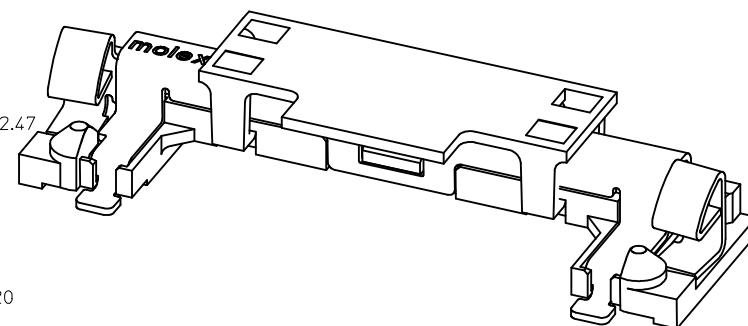

- NOTES:
1. THIS LATCH USES WITH MINIPCI EXPRESS CONN.
 2. HOUSING:PA46
GLASS FILLED,COLOR:BLACK UL94V-0
METAL SHELL:STAINLESS STEEL,THICKNESS:0.3MM
BEAM:STAINLESS STEEL,THICKNESS:0.3MM
 3. FINISH:GOLD FLASH PLATED IN SOLDER AREA.
 4. DATE CODE:YY:YEAR MM:MONTH DD:DATE
 5. THE MODULE CARD REFERS TO MINI PCI EXPRESS CARD
ELECTROMECHANICAL SPECIFICATION.
 6. FOR PICK AND PLACE AREA.
 7. MATCHED CONNECTOR:67910-0002,67910-1002
 8. DATUM D IS THE TOP SURFACE OF PCB.
 9. PART 48099**** COMPLIANT TO ROHS DIRECTIVE 2002/95/EC
AND ELV DIRECTIVE 2000/53/EC.

tb_frame_A3_P_AM_T
Rev. F 2009/06/18



DETAIL 3
Scale 5:1

DETAIL 4
Scale 5:1

tb_frame_A3_P_AM_T
Rev. F 2009/06/18