


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9383COLOR
 INSULATOR: POLYPROPYLENE. AVAILABLE IN BLK, RED,
 YEL, GRN, BLU & WTE.
 FRAME: NICKEL PLATED BRASS.
 CONTACT SPRING: NICKEL PLATED BERYLLIUM COPPER.
2. P/N: W-600/COLOR
 18AWG TINNED COPPER
 0.144 [3.66] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.
3. PERFORMANCE
 MAXIMUM CURRENT: 4.0 AMPS
 MAXIMUM VOLTAGE: 5000 W.V.D.C.
 MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

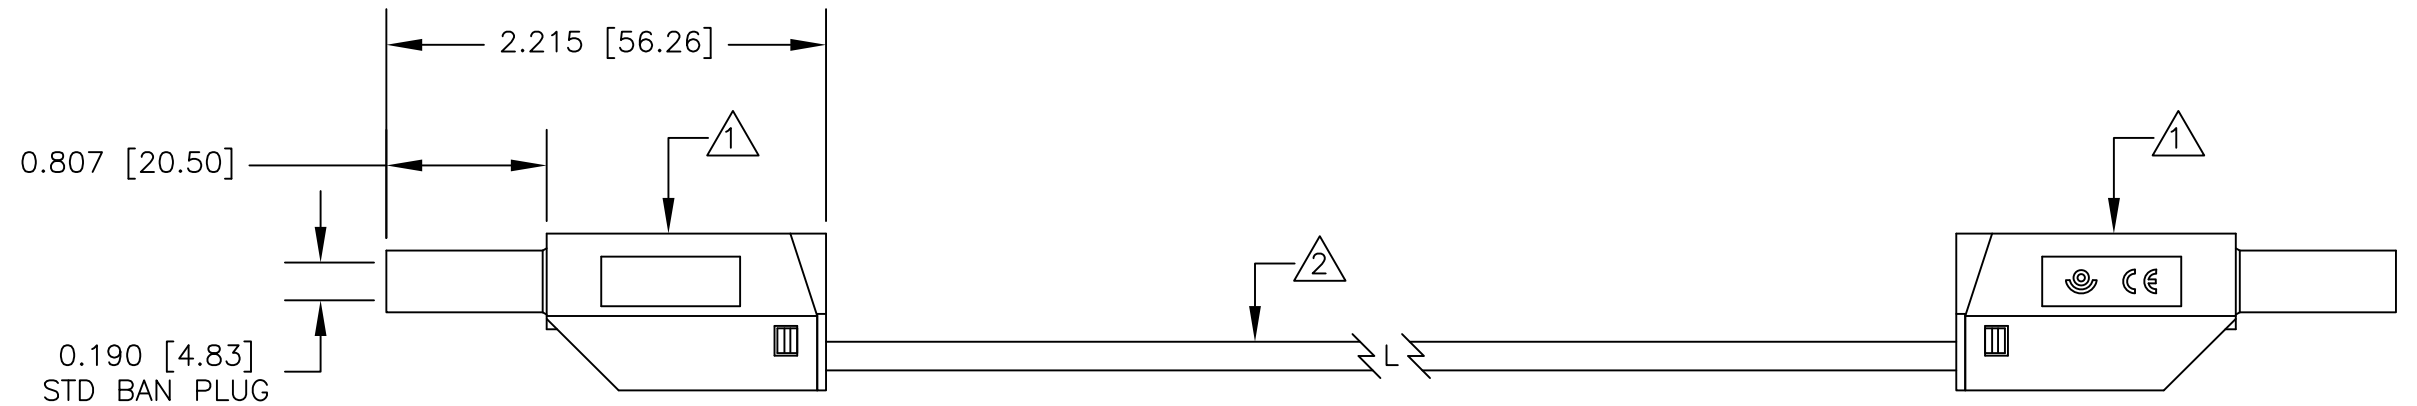

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L. 10/12	DESCRIPTION STK SHRD BAN PLUG (9383) JUMPER	
			APPROVED BY			
NEXT ASSY	USED ON	FINISH SEE NOTE.	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
APPLICATION		DO NOT SCALE DRAWING	B	08505	9902	
			SCALE	1:1	SHEET 1 OF 1	