


NOTICE: ALL PARTS MUST MEET TO RoHS REQUIREMENTS

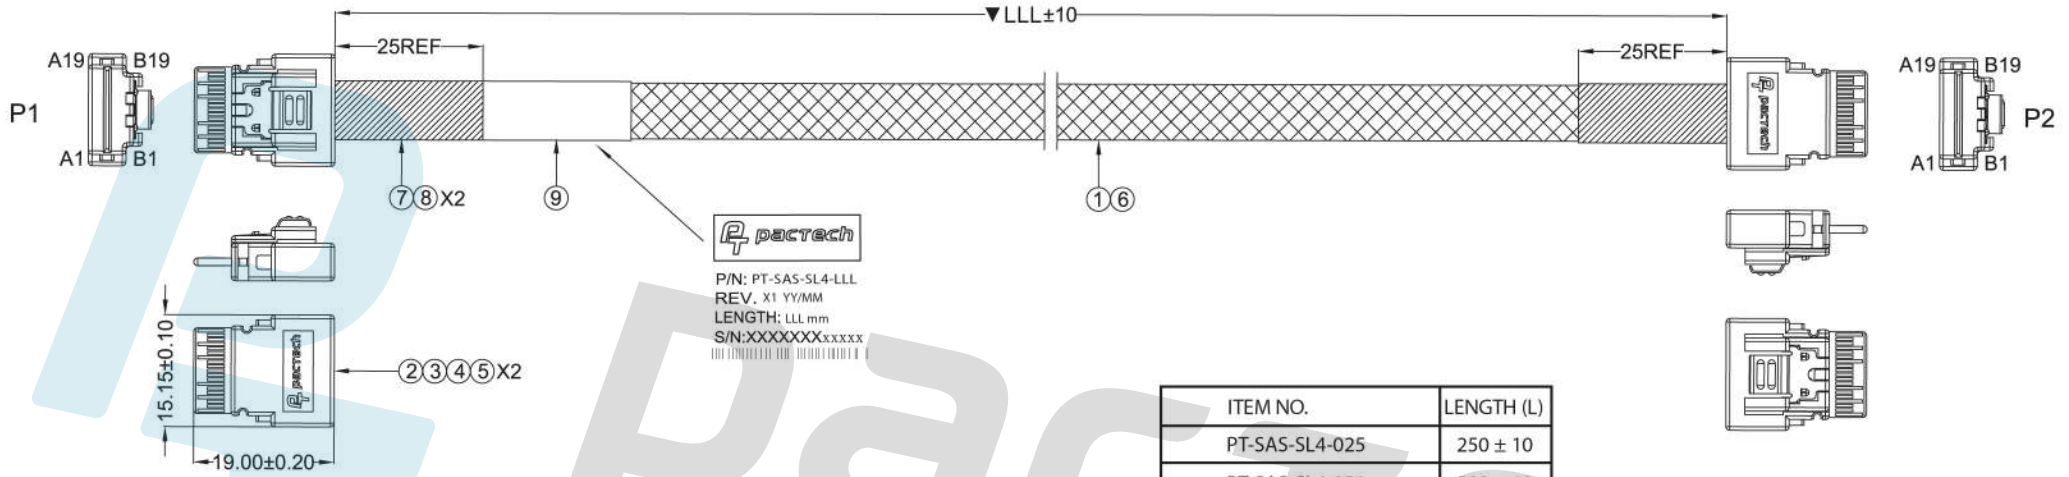

pactech
 P/N: PT-SAS-SL4-LLL
 REV. X1 YY/MM
 LENGTH: LLL mm
 S/N: XXXXXXxxxxxx

ITEM NO.	LENGTH (L)
PT-SAS-SL4-025	250 ± 10
PT-SAS-SL4-050	500 ± 10
PT-SAS-SL4-075	750 ± 10
PT-SAS-SL4-100	1000 ± 15

For Customer Made Items Order:
 * Minimum \$200 value
 * NCNR (Non-cancelable & non-returnable)
 * One time tooling charge, if any, must be approved with authorized signature & date.
 * Turn around time counted ARO (After Received FA or drawing approval)

APPROVED BY
 COMPANY: _____
 PURCHASING/ENGINEER: _____
 DATE: _____

ITEM	NAME	DESCRIPTION	Q'TY
9	LABEL	WHITE LABEL, L*W=57*26MM	1
8	ACETATE TAPE	W=25MM ACETATE TAPE,BLACK	2
7	ACETATE TAPE	W=15MM ACETATE TAPE,BLACK	A/R
6	WEAVE	L*W=495*12MM PLASTIC BRAID SLEEVE, PET, BLACK	1
5	LATCH	SFF-8654 LATCH,SUS301 1/2H	2
4	OVER MOLD	PBT4815+15%GF,BLACK,UL94V-0	2
3	INNER MOLD	LD-PE, NATURAL	A/R
2	PCB	SFF-8654 4i STR PCB,Au 30" Min	2
1	SAS CABLE	L=522mm SAS3.0 CABLE: (32AWG*2C+2D)+HM,COLOR:SILVER, 100Ω	A/R
		L=522 mm SAS3.0 CABLE: (30AWG*2C+2D)+HM,COLOR:SILVER, 92Ω	
		L=522mm SAS3.0 CABLE: (30AWG*2C+2D)+HM,COLOR:SILVER, 85Ω	

Customer P/N: N/A
Customer REV.: N/A
PART NO. SEE CHART
APPROVED A.Chui
CHECKED J.Chan
DRAWN
DATE 2019-01-14

pactech

TITLE
SLIMLINE SAS 4i STR CABLE ASS'Y

DRAWING NO. PT-SAS-SL4-LLL

UNIT	SCALE	SHEET	REV.
MM	NONE	1/2	X1


- . * ±0.1
- . ** ±0.1
- . *** ±0.05
- FRACT. ±1/32"
- ANGULAR ±1/2°

NOTICE: ALL PARTS MUST MEET TO RoHS REQUIREMENTS

WIRING TABLE

P1		P2	
GND	A1	B1	GND
Rx0+	A2	B2	Tx0+
Rx0-	A3	B3	Tx0-
GND	A4	B4	GND
Rx1+	A5	B5	Tx1+
Rx1-	A6	B6	Tx1-
GND	A7	B7	GND
SB	A8	B8	SB
SB	A9	B9	SB
GND	A10	B10	GND
SB	A11	B11	SB
SB	A12	B12	SB
GND	A13	B13	GND
Rx2+	A14	B14	Tx2+
Rx2-	A15	B15	Tx2-
GND	A16	B16	GND
Rx3+	A17	B17	Tx3+
Rx3-	A18	B18	Tx3-
GND	A19	B19	GND
GND	B1	A1	GND
Tx0+	B2	A2	Rx0+
Tx0-	B3	A3	Rx0-
GND	B4	A4	GND
Tx1+	B5	A5	Rx1+
Tx1-	B6	A6	Rx1-
GND	B7	A7	GND
SB	B8	A8	SB
SB	B9	A9	SB
GND	B10	A10	GND
SB	B11	A11	SB
SB	B12	A12	SB
GND	B13	A13	GND
Tx2+	B14	A14	Rx2+
Tx2-	B15	A15	Rx2-
GND	B16	A16	GND
Tx3+	B17	A17	Rx3+
Tx3-	B18	A18	Rx3-
GND	B19	A19	GND

LABEL INFORMATION

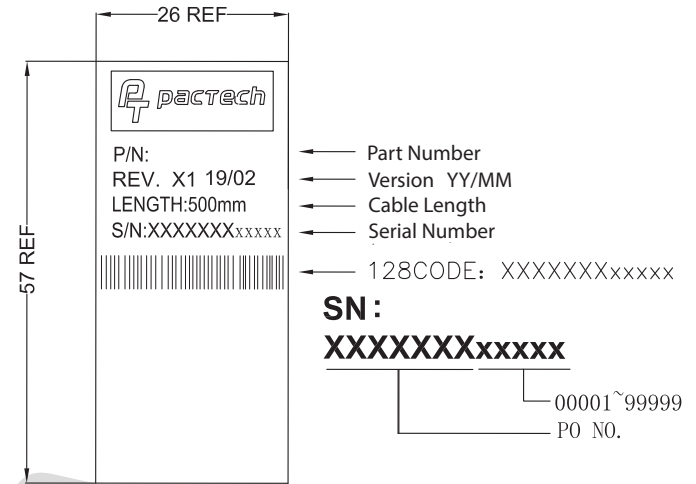

FONT: ARIAL
HEIGHT: 2.0mm Min

TEST CONDITIONS:

1. 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST.
2. CONDUCTIVE RESISTANCE: 3Ω MAX.
3. INSULATION RESISTANCE: 10 MΩ
4. HI-POT TEST: 300VDC FOR 10ms.
5. THIS PRODUCT MEETS SAS 3.0 (12G)

1. .* ±0.1 2. .** ±0.1 3. .*** ±0.05 4. FRACT.±1/32" 5. ANGULAR ±1/2"	Customer P/N: N/A								
	Customer REV.: N/A								
	PART NO. SEE CHART	TITLE SLIMLINE SAS 4i STR CABLE ASS'Y							
	APPROVED A.Chui	DRAWING NO. PT-SAS-SL4-LLL							
	CHECKED J.Chan	<table border="1"> <tr> <td>UNIT</td> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>MM</td> <td>NONE</td> <td>2/2</td> <td>X1</td> </tr> </table>	UNIT	SCALE	SHEET	REV.	MM	NONE	2/2
UNIT	SCALE	SHEET	REV.						
MM	NONE	2/2	X1						
DRAWN	DATE 2019-01-14								