


COIL: @ 25°C  
 RESISTANCE 300 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.0 VDC  
 MUST RELEASE 1.8 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 50 g's 11 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 10 MS MAX.  
 OPERATE BOUNCE 2 MS MAX.  
 RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

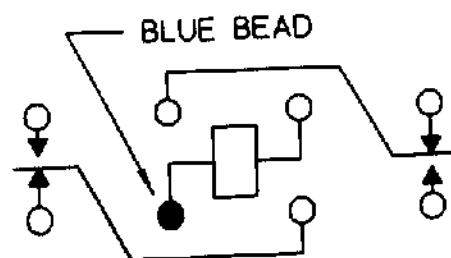

CONTACT RATING: 10 AMPS 28 VDC  
 5 AMPS 115 VAC/400 Hz RESISTIVE  
 100,000 OPERATIONS

DR. R.B. 9/13/94 CK. 9/13/94

COMMUNICATIONS  
 INSTRUMENTS, INC.

CUST. NO. G.I.I. STD

TYPE '07' RELAY

B07B035BC1