


REV. 1 10/4/96

COIL: @ 25°C
 RESISTANCE 47 OHMS ± 10%
 NOMINAL VOLTAGE 5.0 VDC
 MUST OPERATE 2.2 VDC
 MUST RELEASE 0.21 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2500 CPS @ 20 g's
 SHOCK 50 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 6 MS MAX.
RELEASE TIME 5 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

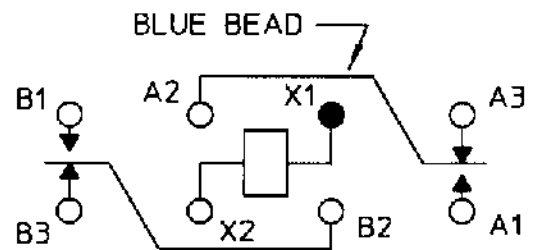

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/2/91 CKO/A/10003

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/44-004M

TYPE "HMS" RELAY

HMS1131S01M