
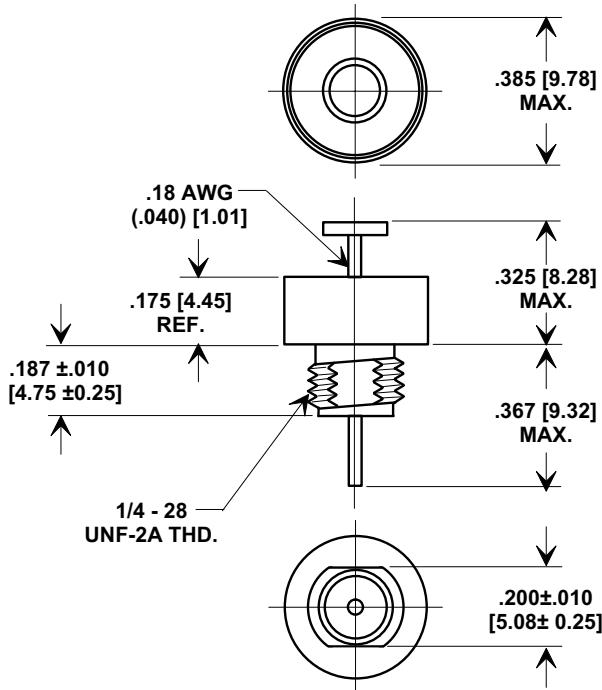



This drawing is the property of
Tucsonix, Inc., and may not be
used, reproduced, published or
disclosed to others without ex-
pressed authorization by Tucsonix Inc.


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

**Electrical Testing
per Tucsonix standard
test plans and Mil-Std-202
Test Methods.**

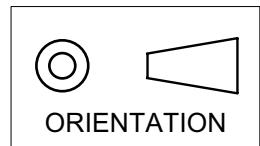

NOTES:

1. TUSONIX STANDARD PART NUMBER: 4600-000.
TUSONIX RoHS COMPLIANT PART NUMBER: 4600-000 LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS
PART NUMBER WHEN ORDERING.
 2. MATERIALS:
BUSHING - TIN PLATED STEEL
LEAD FINISH: STANDARD PART: SOLDER PLATED COPPER.
RoHS PART: SILVER PLATED COPPER.
NUT - TIN PLATED BRASS
L"WASHER - TIN PLATED PHOSPHOR BRONZE
 3. PART MARKING: TRADEMARK AND VARIATION NUMBER.
STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
 4. MOUNTING TORQUE: 8 lb - ins. max
 5. DCR - $.01\Omega$ max.
 6. MAX. SOLDER TEMPERATURE 500°F

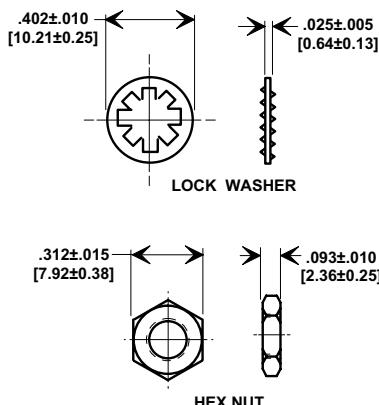

MIN. CAP (UF)	DWV (VDC)	I.R. MIN. @ 100 (VDC.)	WORKING VOLTAGE D.C.		CURRENT DC (AMPS.)	MIN. NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220						TEMP. CHARAC.
			85°C	125°C		30 KHz	100 KHz	300 KHz	1 MHz	10 MHz	1 GHz	
1.4	300	10 GΩ	100	70	15	15	25	34	44	60	70	X7W

REVISION RECORD					
Original Release C.O.	6769	0			
METRIC DIMS & NOTES ADDED. E.C. 7-17-92					
1	6789	1			
WVDC REVISED 100 & 70 WERE 80 & 50. L.E. 10-26-92					
2	6992	2			
RDN TO COMP FMT. S.M. 02-14-02					
3	20020213-4-04	3			
WORKING VOLTAGE REV'D 100, 70 WERE 80, 50 & TEMP. CHARAC. ADDED					
4	20020903-1-01	4			
ADDED AND REVISED NOTES. S.M. 09-06-06					
5	20060905-3-01	5			
			--TOLERANCES-- Unless Otherwise Specified		Title
			DECIMAL ± 		
			ANGLES ± 		Drawn S.M. 02-14-02 Scale 2 X
			Approved T.C. 02-14-02		
			TUSONIX TUCSON, ARIZONA	A	4600-000