
Data sheet 15930.8 AQI/PRC/8 YE



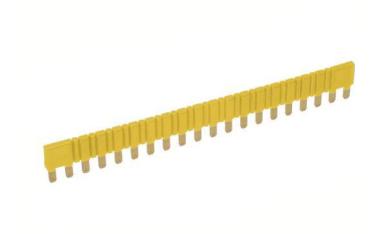

External cross-connector insulated for Plug-Relay-Compact (PRC 2), 8-pole, can be shortened, Voltage: 250 V, Current: 10 A

RAL: 1026

Business data

Duomoco data	
Article number	<u>15930.8</u>
Article name	AQI/PRC/8 YE
GTIN (EAN)	4044211137397
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	4.7 g
Weight per piece (including packaging)	6.5 g
Unit of weight	G
Customs number	85389099
Country of origin	IT
Prio-Article	15930.8
Product description	Insulated external cross-connector
	·

Data sheet





Technical data		
Ratings		
Max. voltage	250 V	
Rated current	10 A	
Connection data		
No. of poles	8	
Materials		
Insulation housing	Polyamide 6.6	
Flammability class UL 94	V-2	
Working temperature, min.	-40 °C	
Working temperature, max.	105 °C	
Environmental Product Compliance		
REACH Candidate Substance Note	No	

Data sheet 15930.8 AQI/PRC/8 YE



Media



Accessories

##INVERSE##CONTA-ELECTRONICS



Plug-Relay-Compact (PRC) socket base PRC with screw connection, Mounting type: Mounting rail TS 35, 2 CO contact, Input voltage: 6.12 or 24 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15920.2	PRC 2 6-12-24V AC/DC	4044211137359	10 ST



Plug-Relay-Compact (PRC) socket base PRC with screw connection, Mounting type: Mounting rail TS 35, 2 CO contact, Input voltage: 220 to 240 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15921.2	PRC 2 220240V AC/DC	4044211137366	10 ST



Plug-Relay-Compact (PRC) socket base PRC with tension-spring connection, Mounting type: Mounting rail TS 35, 2 CO contact, Input voltage: 6, 12 or 24 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15922.2	ZPRC 2 6-12-24V AC/DC	4044211137373	10 ST



Plug-Relay-Compact (PRC) socket base PRC with tension-spring connection, Mounting type: Mounting rail TS 35, 2 CO contact, Input voltage: 220 to 240 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15923.2	ZPRC 2 220240V AC/DC	4044211137380	10 ST



Plug-Relay-Compact (PRC) Complete, Consisting of base PRC... with tension-spring connection and pluggable miniature relay PRS... with power contact, Mounting type: Mounting rail TS 35, 2 CO contacts, Input voltage: 12 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
<u>15927.2</u>	ZPRCU 2 12V AC/DC	4044211137458	10 ST



Plug-Relay-Compact (PRC) Complete, Consisting of base PRC... with screw connection and pluggable miniature relay PRS... with power contact, Mounting type: Mounting rail TS 35, 2 CO contacts, Input voltage: 12 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
<u>15924.2</u>	PRCU 2 12V AC/DC	4044211137427	10 ST



##INVERSE##CONTA-ELECTRONICS



Plug-Relay-Compact (PRC) Complete, Consisting of base PRC... with screw connection and pluggable miniature relay PRS... with power contact, Mounting type: Mounting rail TS 35, 2 CO contacts, Input voltage: 24 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15925.2	PRCU 2 24V AC/DC	4044211137434	10 ST



Plug-Relay-Compact (PRC) Complete, Consisting of base PRC... with screw connection and pluggable miniature relay PRS... with power contact, Mounting type: Mounting rail TS 35, 2 CO contacts, Input voltage: 240 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15926.2	PRCU 2 240V AC/DC	4044211137441	10 ST



Plug-Relay-Compact (PRC) Complete, Consisting of base PRC... with tension-spring connection and pluggable miniature relay PRS... with power contact, Mounting type: Mounting rail TS 35, 2 CO contacts, Input voltage: 24 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15928.2	ZPRCU 2 24V AC/DC	4044211137465	10 ST



Plug-Relay-Compact (PRC) Complete, Consisting of base PRC... with tension-spring connection and pluggable miniature relay PRS... with power contact, Mounting type: Mounting rail TS 35, 2 CO contacts, Input voltage: 240 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15929.2	ZPRCU 2 240V AC/DC	4044211137472	10 ST



Plug-Relay-Compact (PRC) Complete, Consisting of base PRC... with tension-spring connection and pluggable miniature relay PRS... with inrush power contact, Mounting type: Mounting rail TS 35, 1 CO contact, Input voltage: 24 VAC/DC

14	Article number	Article name	GTIN (EAN)	Packaging unit
	16059.2	ZPRCU 1L/24V AC/DC	4044211149673	10 ST

Data sheet

15930.8 AQI/PRC/8 YE



##INVERSE##CONTA-ELECTRONICS



Plug-Relay-Compact (PRC) Complete, Consisting of base PRC... with screw connection and pluggable miniature relay PRS... with inrush power contact, Mounting type: Mounting rail TS 35, 1 CO contact, Input voltage: 24 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
16058.2	PRCU 1L/24V AC/DC	4044211149666	10 ST

##INVERSE##CONTA-ELECTRONICS



Plug-Relay-Compact (PRC) socket base PRC with tension-spring connection, Mounting type: Mounting rail TS 35, 2 CO contact, Input voltage: 220 to 240 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15923.2	ZPRC 2 220240V AC/DC	4044211137380	10 ST

##INVERSE##CONTA-ELECTRONICS



Plug-Relay-Compact (PRC) Complete, Consisting of base PRC... with tension-spring connection and pluggable miniature relay PRS... with power contact, Mounting type: Mounting rail TS 35, 2 CO contacts, Input voltage: 24 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15928.2	ZPRCU 2 24V AC/DC	4044211137465	10 ST

##INVERSE##CONTA-ELECTRONICS



Plug-Relay-Compact (PRC) Complete, Consisting of base PRC... with screw connection and pluggable miniature relay PRS... with power contact, Mounting type: Mounting rail TS 35, 2 CO contacts, Input voltage: 240 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15926.2	PRCU 2 240V AC/DC	4044211137441	10 ST

##INVERSE##CONTA-ELECTRONICS

Data sheet 15930.8 AQI/PRC/8 YE





Plug-Relay-Compact (PRC) Complete, Consisting of base PRC... with tension-spring connection and pluggable miniature relay PRS... with power contact, Mounting type: Mounting rail TS 35, 2 CO contacts, Input voltage: 12 VAC/DC

Article number	Article name	GTIN (EAN)	Packaging unit
15927.2	ZPRCU 2 12V AC/DC	4044211137458	10 ST