

| G | нт — — — — — — — — — — — — — — — — — — — | m | 0 |
|-------|--|---|---|



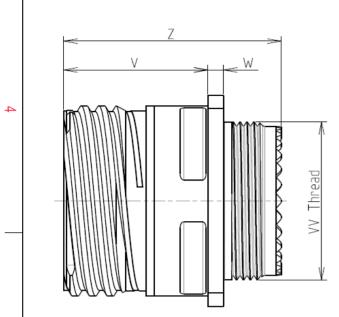

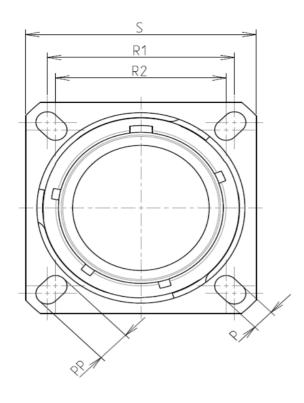

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Stainless Steel | | |
|--|--|--|--|
| -Shell Plating | : Passivated | | |
| -Insulator | : Thermoplastic | | |
| -Contacts | : Copper Alloy | | |
| -Seals & Grommet | : Silicon Elastomer | | |
| -Contact Plating | : Gold over copper Alloy $0.8 \mu m$ minimum | | |
| -Durability | : 500 Mating cycles | | |
| -Delivered with Souriau contacts and Accessories | | | |
| -Temperature Range | -65°C to +200°C | | |
| -Salt Spray | : 500 hours | | |

: 28.9 g ± 10%

8D 0

G

11

К

22

Ρ


F

Е

| Connector dimension | | | |
|---------------------|---------------|--|--|
| Dim | Nominal | | |
| Р | 3.25±0.2 | | |
| PP | 4.93±0.2 | | |
| R1 | 20.62 | | |
| R2 | 18.26 | | |
| S | 26.2±0.3 | | |
| V | 20.83+0/-1.25 | | |
| W | 2.1/2.5 | | |
| Z | 31.5 Max | | |
| VV THREAD | M15x1-6g | | |

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

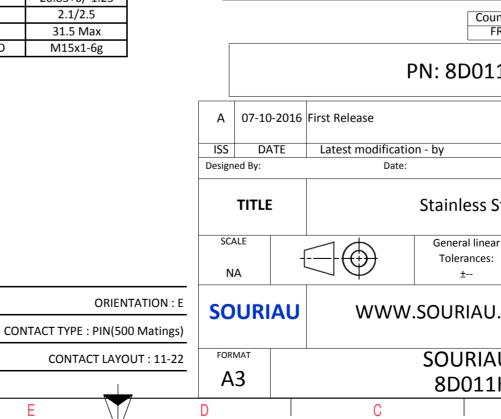

| Φ | | А | | |
|--|---|-------------------------|--------|---|
| | | | | 4 |
| | | | | |
| AS EXAMPLE | | | | 3 |
| r any non-confor s which does not er of the Parties o ndation, technica | comply with or by a third pa I notice.) | rty | | |
| INTRY Jur FR 1K22PE | isdiction & Cor Not Listed | | | 2 |
| | | | MOD N° | |
| Steel Recep | customer drawing eel Receptacle 8D series | | | |
| ar : | | / PROJECT 859 | | 1 |
| J.COM | This document is the property of | | | |
| U DRG N K22PE-C | 0 | | SHEET | |
| B | | A | _, _ | J |
| | | | | |

| 4 | | Contact Layout | | | | Panel Cuto SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING |
|------------|-------------------------|---|---|---|-----------------------|---|
| | (| ^{e^o ۹,} 4#22D | 1 | | | |
| ω | Ctc A B C D | X Y 1.905 1.905 1.905 -1.905 -1.905 -1.905 -1.905 1.905 | | | | Dim ØA ØA |
| | | | | | | R1 ØT |
| | | | | | | SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommendation) Coun |
| N | | | | | | PN: 8D011 |
| _ | | | | | ISS I Designed By: | |
| _ - | | | | | SCALE NA | General linear Tolerances: ± |
| | | | | | FORMAT A3 | SOURIAU. SOURIAU 8D011k |
| l | Н | G | F | E | D | C |
| | | | | | | |

Т

ш

т

G

0

