PRODUCT NR.	DIM "A"
88963-X01LF	5.00 REF.
88963-X11LF	3.35 REF.

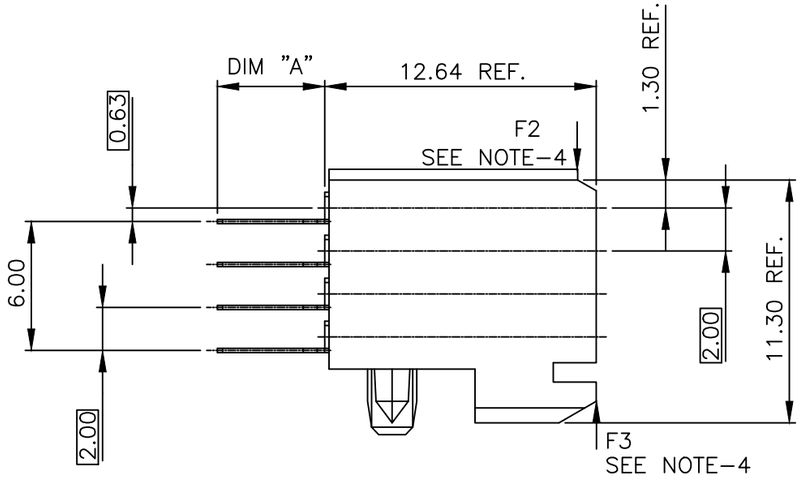

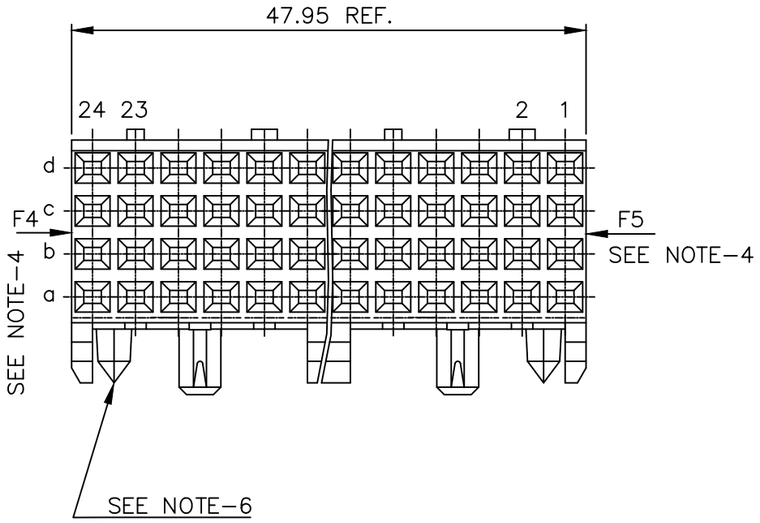

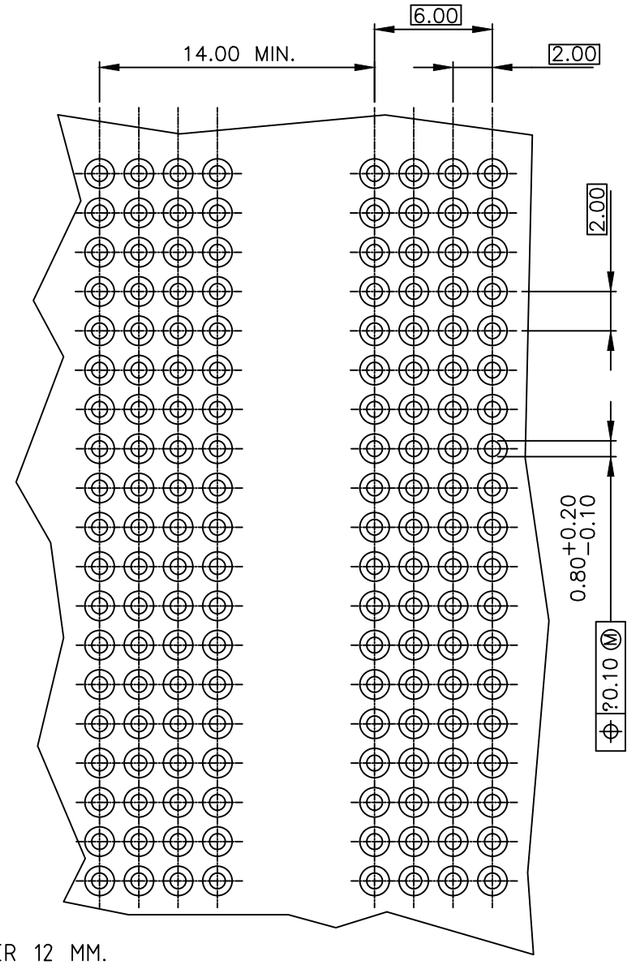

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

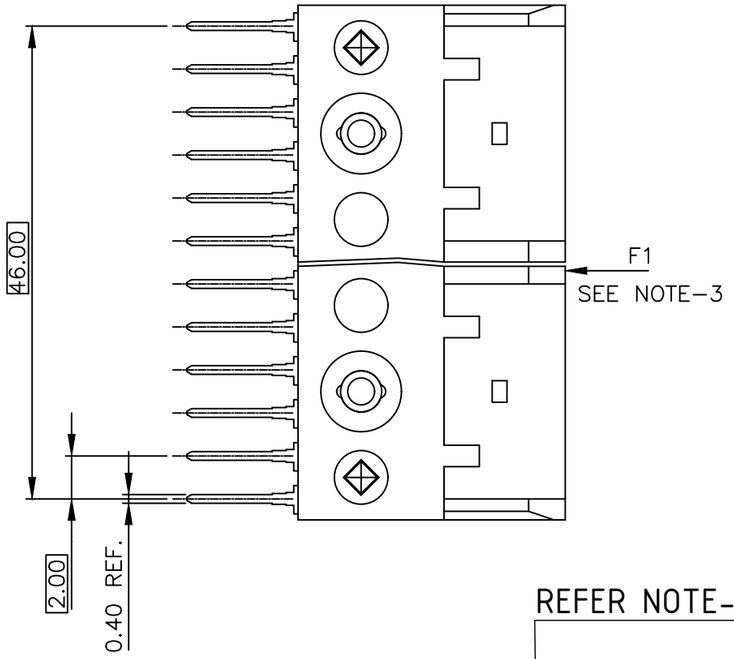

REFER NOTE-2

88963-XYYLF

NOTES:

1. MATERIAL : BODY : LCP UL94-V0
   : CONTACT : COPPER ALLOY.
2. FOR PLATING PERFORMANCE REFER DRAWING # 10159408 (K)
3. LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON MAXIMUM PER 12 MM. CONNECTOR LENGTH.
4. LOAD IN THIS DIRECTION 50 NEWTON MAXIMUM PER CONNECTOR.
5. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD, THE USE OF A FIXTURE IS RECOMMENDED.
6. DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
7. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47- 0004.
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
9. A (K) SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

ltr	ecn no	dr	date
H	DG08-0171	TER	2008-08-26
J	DG09-0068	CENH	2009-06-06
K	ELX-I-38913	MINI	2020-10-23

mat'l. code

surface ISO 1302 ✓ tolerance ISO 406 ISO 1101 projection

tolerances unless otherwise specified

angles 0°±2° linear .X±0.3 .XX±0.13 .XXX±0.050

mm

scale –

dr	H. BOUWKNEGT	1993-01-20
engr	ARUN	2020-10-23
chr	ALEX BABU	2020-10-23
appd	SANOJ	2020-10-23

product family METRAL

title STR FEMALE STB
SIGNAL 48MM

dwg no 88963 sheet 1 of 1 size A3

type Product Customer Drawing

sheet index: revision K, sheet 1

© 2016 AFCI