



REVISIONS				
P	LTR	DESCRIPTION	DATE	BY
M		ECO-20-011948	24AUG2020	SB JB

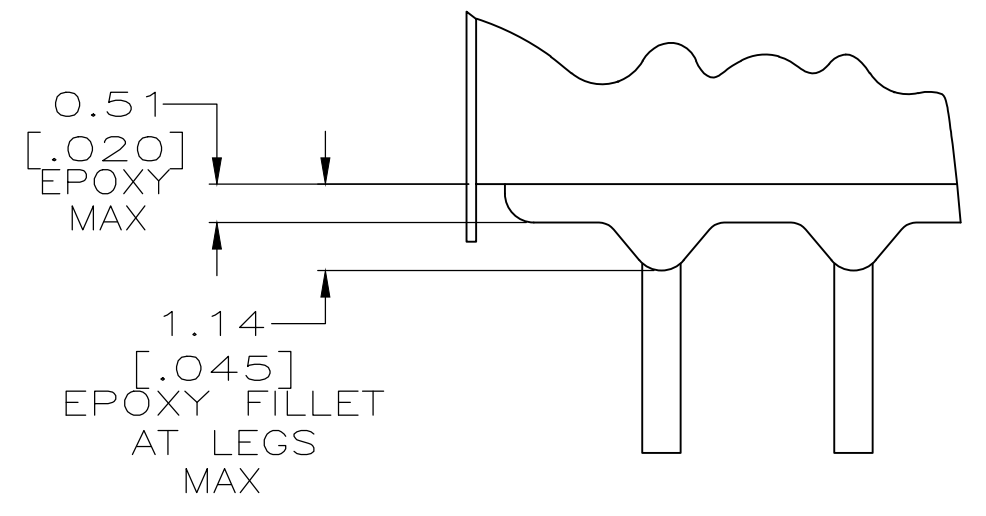

DETAIL A
SCALE 10:1


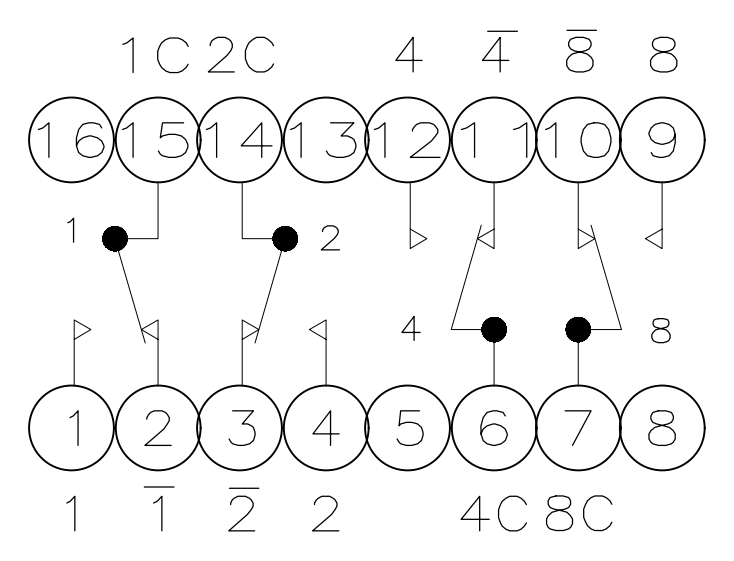


SCHEMATIC
(POSITION 0)

- 1 SLOT FOR SCREWDRIVER ACTUATION, AFTER REMOVAL OF TAPE.
- 2 FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7066 AND INSTRUCTION SHEET 6811.
- SWITCH BOTTOM IS SEALED.
- 4 CONTACT FINISH TO BE 0.00076 [.000030] GOLD OVER NICKEL.
- 5 MATERIAL:
HOUSING : BLACK POLYESTER
CONTACTS : BERYLLIUM COPPER.
- 6 REMOVABLE TAPE TO SEAL ACTUATOR END.
- 7 MARKS WILL BE ADDED BY LASER MARK PROCESS.

		POSITION															
		0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
COMMON TO	1		●		●		●		●		●		●		●		●
	2			●	●			●	●			●	●			●	●
	4					●	●	●	●				●	●	●	●	●
	8									●	●	●	●	●	●	●	●
	1	●		●		●		●		●		●		●		●	
	2	●	●			●	●			●	●			●	●		
	4	●	●	●	●					●	●	●	●				
	8	●	●	●	●	●	●	●	●								

HEXADECIMAL: WITH COMPLEMENT

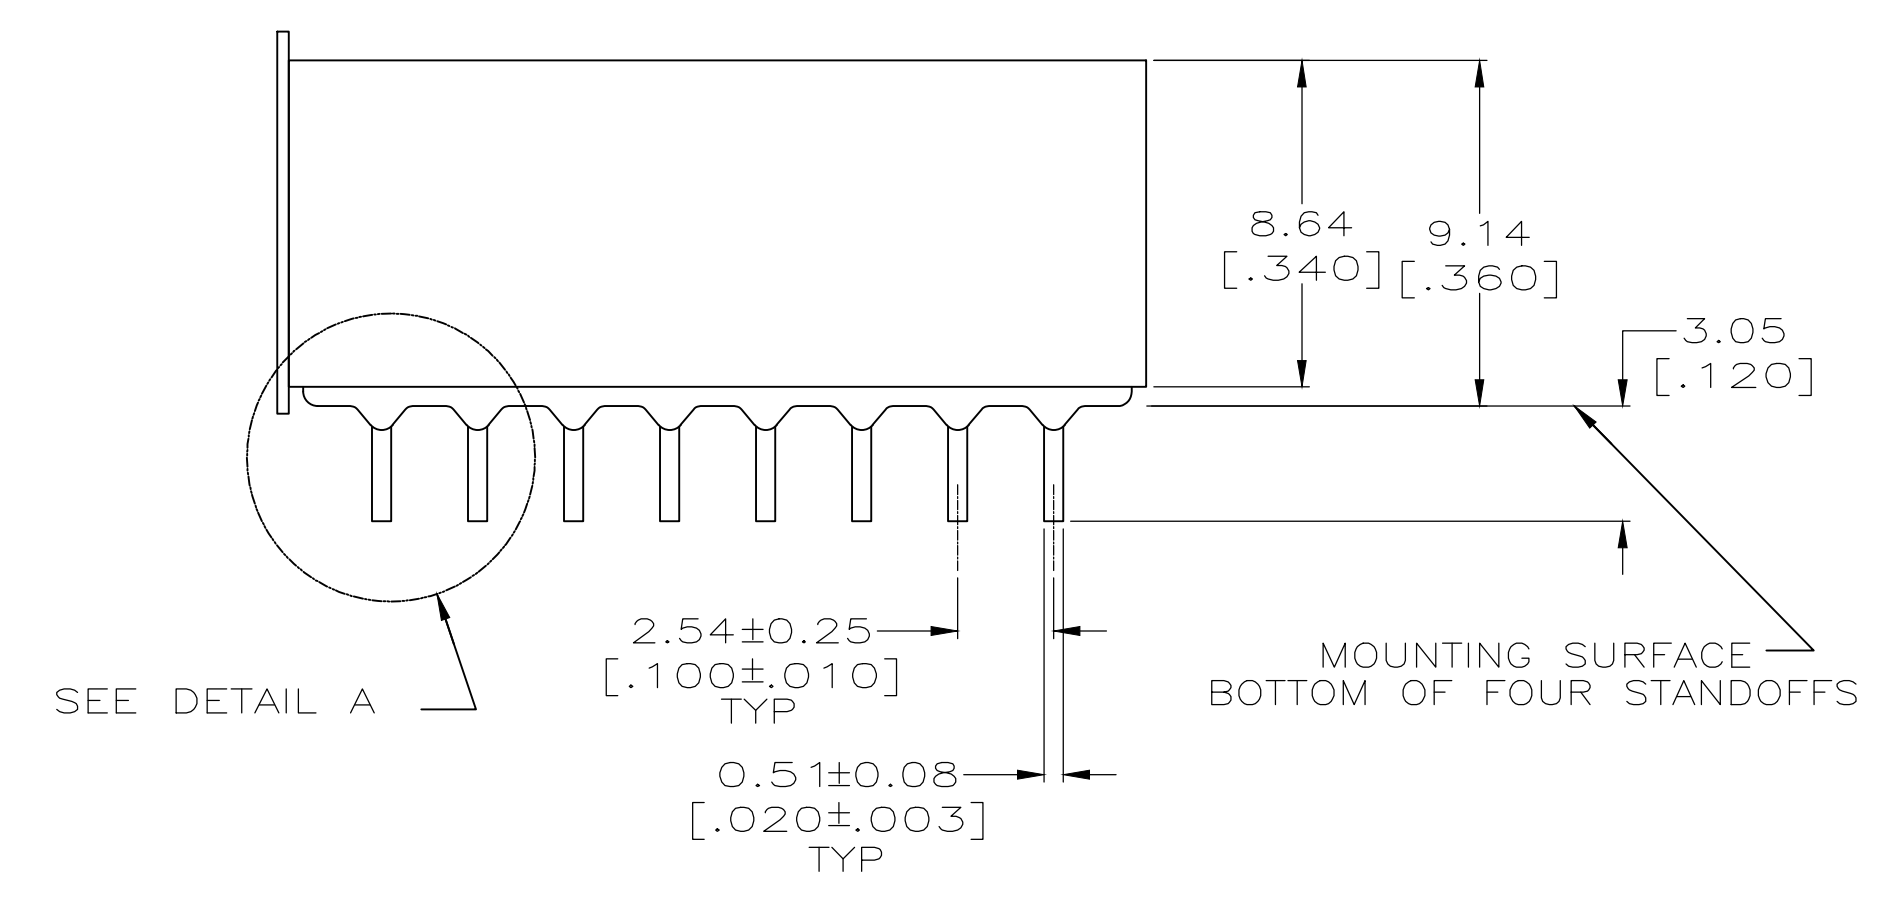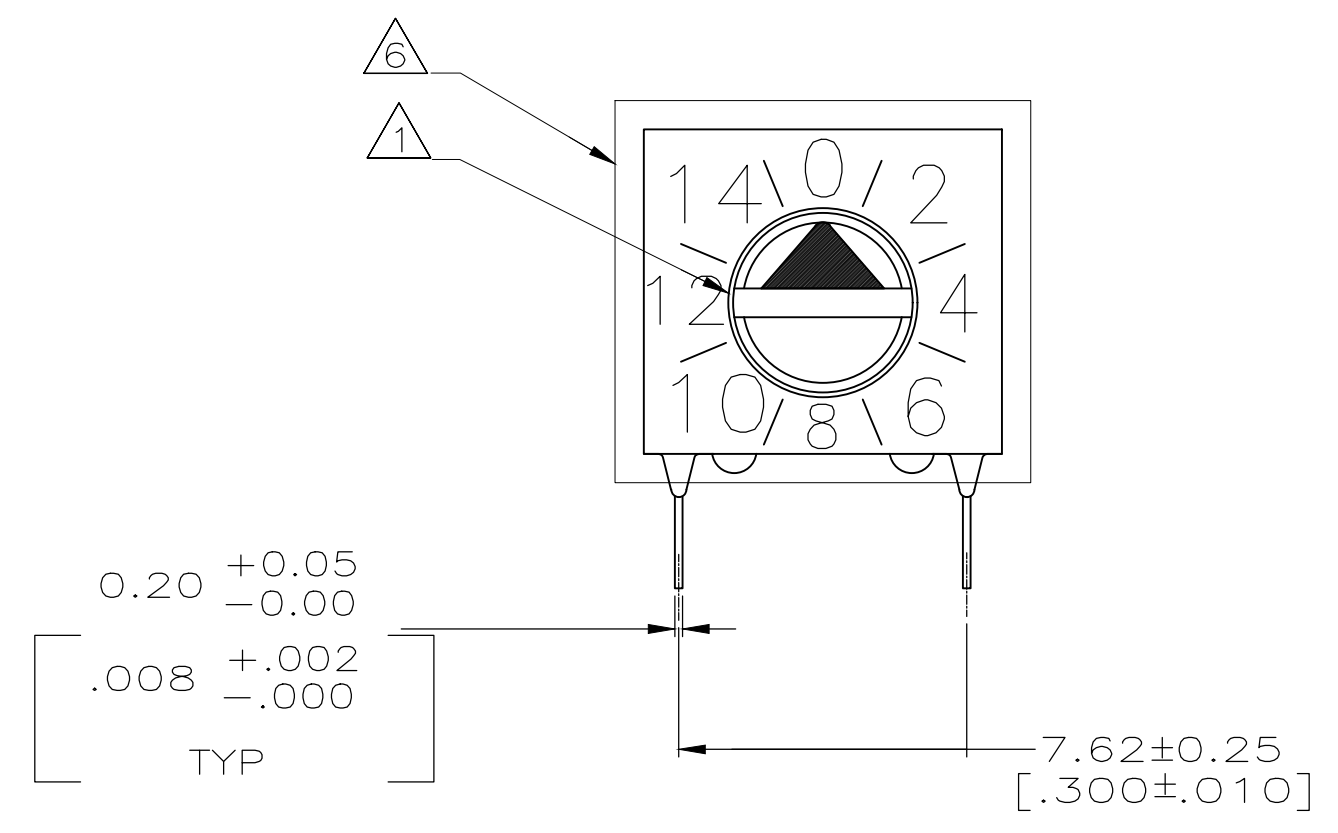

54792-2
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN W. SORAH 1-8-97	TE Connectivity	
DIMENSIONS: INCHES		CHK: R. TALLEY 1-8-97		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: J. ROBB 1-8-97	NAME: SWITCH ASSY, PREPROGRAMMED DIP, 16 POSITION, SCREWDRIVER SLOT	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.30 [.012] 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC	RESTRICTED TO	
MATERIAL		WEIGHT	SIZE: A1	CAGE CODE: 00779
FINISH		DRAWING NO: 54792-2		REV: M
CUSTOMER DRAWING		SCALE: 5:1		SHEET: 1 OF 1