




**PSA** PASSIVE SYSTEM ALLIANCE  
WALSIN TECHNOLOGY CORPORATION

## RF Devices & Customer made Antenna

---

[www.passivecomponent.com](http://www.passivecomponent.com)

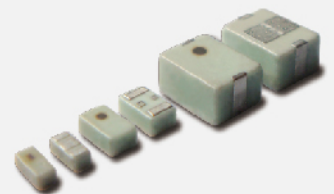

## Product Portfolio




Multilayer Ceramic Capacitors



Chip Resistors



Disc Capacitors

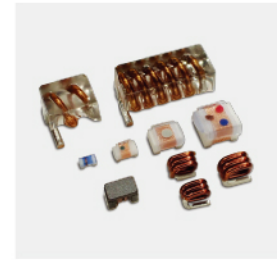


Inductors



RF Filters



Antenna

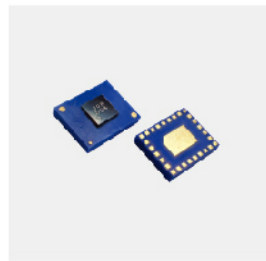

Antenna Switch & Module



MOV & MLV

## IEC-63 Nominal Resistance / Capacitance

|            |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>E1</b>  | 100 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| <b>E3</b>  | 100 |     |     | 220 |     |     | 470 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| <b>E6</b>  | 100 | 150 | 220 | 330 | 470 | 680 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| <b>E12</b> | 100 | 120 | 150 | 180 | 220 | 270 | 330 | 390 | 470 | 560 | 680 | 820 |     |     |     |     |     |     |     |     |     |     |     |     |
| <b>E24</b> | 100 | 110 | 120 | 130 | 150 | 160 | 180 | 200 | 220 | 240 | 270 | 300 | 330 | 360 | 390 | 430 | 470 | 510 | 560 | 620 | 680 | 750 | 820 | 910 |
| <b>E96</b> | 100 | 102 | 121 | 124 | 147 | 150 | 178 | 182 | 215 | 221 | 261 | 267 | 316 | 324 | 383 | 392 | 464 | 475 | 562 | 576 | 681 | 698 | 825 | 845 |
|            | 105 | 107 | 127 | 130 | 154 | 158 | 187 | 191 | 226 | 232 | 274 | 280 | 332 | 340 | 402 | 412 | 487 | 499 | 590 | 604 | 715 | 732 | 866 | 887 |
|            | 110 | 113 | 133 | 137 | 162 | 165 | 196 | 200 | 237 | 243 | 287 | 294 | 348 | 357 | 422 | 432 | 511 | 523 | 619 | 634 | 750 | 768 | 909 | 931 |
|            | 115 | 118 | 140 | 143 | 169 | 174 | 205 | 210 | 249 | 255 | 301 | 309 | 365 | 374 | 442 | 453 | 536 | 549 | 649 | 665 | 787 | 806 | 953 | 976 |

E6:  $\sqrt[6]{10} \approx 1.46$  E12:  $\sqrt[12]{10} \approx 1.21$

E1 series resistance: 1Ω, 10Ω, 100Ω, 1000Ω, 10000Ω, 100000Ω

**INDEX**

| <b>Subject</b>   | <b>Page</b> |
|--|-------------|
| <b>ORDERING CODE</b> .....   | 1~5         |
| <b>CHIP ANTENNA</b> .....  | 5~12        |
| ■ 1.575GHz GPS BAND WORKING FREQUENCY  |             |
| ■ Bluetooth/WiFi BAND WORKING FREQUENCY  |             |
| ■ WiMAX BAND WORKING FREQUENCY   |             |
| ■ UHF BAND WORKING FREQUENCY   |             |
| <b>HIGH FREQUENCY MULTILAYER BAND PASS FILTER</b> .....                          | 13~29       |
| ■ 2.4GHz BAND WORKING FREQUENCY  |             |
| ■ WiMAX BAND WORKING FREQUENCY   |             |
| ■ 5GHz BAND WORKING FREQUENCY  |             |
| ■ 1558 ~ 1606 MHz GNSS Band Applications   |             |
| ■ 860~960MHz/1805~2025 MHz Band Application                                      |             |
| ■ MoCA / Docsis Application  |             |
| ■ LTE BAND Application   |             |
| <b>HIGH FREQUENCY MULTILAYER BALANCED FILTER</b> .....                           | 30~33       |
| ■ 2.4GHz BAND WORKING FREQUENCY  |             |
| <b>HIGH FREQUENCY MULTILAYER LOW PASS FILTER</b> .....                           | 34~43       |
| ■ GSM850/900GHz BAND WORKING FREQUENCY   |             |
| ■ DCS/PCS BAND WORKING FREQUENCY   |             |
| ■ 2.4GHz BAND WORKING FREQUENCY  |             |
| ■ 5GHz BAND WORKING FREQUENCY  |             |
| ■ LTE BAND APPLICATION   |             |
| ■ MoCA Application   |             |
| <b>HIGH FREQUENCY MULTILAYER HIGH PASS FILTER</b> .....                          | 44~45       |
| ■ 2496 ~ 2690 MHz BAND WORKING FREQUENCY   |             |
| ■ 5GHz BAND WORKING FREQUENCY  |             |
| ■ MoCA Application   |             |
| <b>BALUN TRANSFORMERS</b> .....  | 46~55       |
| ■ ISM Band 2.4GHz Application  |             |
| ■ ISM Band 5GHz Application  |             |
| ■ LTE Band Application   |             |
| ■ GSM 850/ GSM 900/ DCS1800/ PCS1900 Application                                 |             |
| <b>DIPLEXER</b> .....  | 56~66       |
| ■ ISM Band 2.4GHz/5GHz Application   |             |
| ■ GPS 1.575GHz/ISM 2.4GHz/5GHz Band Application                                  |             |
| ■ 892 MHz & 1.94GHz Band Working Frequency                                       |             |
| <b>TRIPLEXER</b> .....   | 67~70       |
| ■ GPS 1.575GHz/ISM 2.4GHz/5GHz BandRF Application                                |             |
| <b>COMMON MODE FILTER</b> .....  | 71          |
| ■ DISCRETE CMF for HIGH SPEED TRANSMISSION LINES· USB2.0 · IEEE1394 · LVDS(mini) |             |
| <b>COUPLER</b> .....   | 72~76       |
| ■ ISM Band 2.4GHz Application  |             |
| ■ ISM Band 2.4/5GHz Application  |             |
| ■ LTE BAND Application   |             |
| <b>SAW FILTER</b> .....  | 77~85       |
| <b>ANTENNA SWITCH (GPIO)</b> .....   | 86~87       |
| <b>ANTENNA SWITCH (MIPI)</b> .....   | 88~89       |
| <b>ANTENNA SWITCH (LTE Antenna Tuner- GPIO)</b> .....                            | 90          |
| <b>ANTENNA SWITCH (Network-GPIO)</b> .....                                       | 91          |
| <b>Customer made Antenna</b> .....   | 92~102      |
| ■ Dipole Antenna (None Cable and With Cable)                                     |             |
| ■ PCB Antenna  |             |
| ■ FPA Antenna  |             |
| ■ Metal Antenna  |             |
| ■ NFC Antenna  |             |
| ■ Connector  |             |

\*The specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

\*This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

■ CHIP ANTENNA

| RF            | ANT  | 321612   | 0                        | A   | 5   | T                             |
|---------------|--|--|--------------------------|---|---|-------------------------------|
| Type code     | Product code   | Dimension code   | Unit of dimension        | Application   | Specification   | Packing                       |
| RF/RG: device | ANT : Antenna<br>FRA : Free Antenna<br>ECA : SMD Antenna | Per 2 digits of Length, Width, Thickness<br>321612 =<br>Length =32<br>Width = 16<br>Thickness = 12 | 0 : 0.1 mm<br>1 : 1.0 mm | A : 2.4GHz ISM Band<br>E : GPS 1.5GHz<br>L : 2.4/5.2/5.8GHz Tri Band<br>W : WiMAX | Code from 0~9 dependent on different electrical specification | T: 7" Reeled<br>G: 13" Reeled |

■ HIGH FREQUENCY MULTILAYER BAND PASS FILTER

| RF        | BPF                    | 322515   | 0                        | A   | 4   | T                             |
|-----------|------------------------|--|--------------------------|---|---|-------------------------------|
| Type code | Product code           | Dimension code   | Unit of dimension        | Application   | Specification   | Packing                       |
| RF device | BPF : Band Pass Filter | Per 2 digits of Length, Width, Thickness<br>322515 =<br>Length =32<br>Width = 25<br>Thickness = 15 | 0 : 0.1 mm<br>1 : 1.0 mm | A : 2.4GHz ISM Band<br>W : WiMAX<br>K : ISM 5.2/5.8 Dual Band | Code from 0~9 dependent on different electrical specification | T: 7" Reeled<br>G: 13" Reeled |

■ HIGH FREQUENCY MULTILAYER BALANCED FILTER

| RF            | BPB                                  | 252009   | 0                        | A                                | 7   | T                             |
|---------------|--------------------------------------|--|--------------------------|----------------------------------|---|-------------------------------|
| Type code     | Product code                         | Dimension code   | Unit of dimension        | Application                      | Specification   | Packing                       |
| RF/RG: device | BPB : Balanced Type Band Pass Filter | Per 2 digits of Length, Width, Thickness<br>252009 =<br>Length =25<br>Width = 20<br>Thickness = 09 | 0 : 0.1 mm<br>1 : 1.0 mm | A : 2.4GHz ISM Band<br>W : WiMAX | Code from 0~9 dependent on different electrical specification | T: 7" Reeled<br>G: 13" Reeled |

■ HIGH FREQUENCY MULTILAYER LOW PASS FILTER

| RF        | LPF                   | 201211   | 0                        | A  | 0   | T                             |
|-----------|-----------------------|--|--------------------------|--|---|-------------------------------|
| Type code | Product code          | Dimension code   | Unit of dimension        | Application                                      | Specification   | Packing                       |
| RF device | LPF : Low Pass Filter | Per 2 digits of Length, Width, Thickness<br>201210 =<br>Length =20<br>Width = 12<br>Thickness = 11 | 0 : 0.1 mm<br>1 : 1.0 mm | A : 2.4GHz ISM Band<br>K : ISM 5.2/5.8 Dual Band | Code from 0~9 dependent on different electrical specification | T: 7" Reeled<br>G: 13" Reeled |

■ HIGH FREQUENCY MULTILAYER HIGH PASS FILTER

| RF        | HPF                    | 252009  | 0                        | L  | 0   | T                             |
|-----------|------------------------|---|--------------------------|--|---|-------------------------------|
| Type code | Product code           | Dimension code  | Unit of dimension        | Application                                  | Specification   | Packing                       |
| RF device | HPF : High Pass Filter | Per 2 digits of Length, Width, Thickness<br>252009 =<br>Length =2.5<br>Width = 2.0<br>Thickness = 0.9 | 0 : 0.1 mm<br>1 : 1.0 mm | L : 2.4/4.9/5.2/5.8GHz Multiband Application | Code from 0~9 dependent on different electrical specification | T: 7" Reeled<br>G: 13" Reeled |

■ BALUN TRANSFORMERS

| RF            | BLN          | 201208   | 0                        | A  | 4   | T                             |
|---------------|--------------|--|--------------------------|--|---|-------------------------------|
| Type code     | Product code | Dimension code   | Unit of dimension        | Application                                      | Specification   | Packing                       |
| RF/RG: device | BLN : BALUN  | Per 2 digits of Length, Width, Thickness<br>201208 =<br>Length =20<br>Width = 12<br>Thickness = 08 | 0 : 0.1 mm<br>1 : 1.0 mm | A : 2.4GHz ISM Band<br>K : ISM 5.2/5.8 Dual Band | Code from 0~9 dependent on different electrical specification | T: 7" Reeled<br>G: 13" Reeled |

■ DIPLEXER

| RF               | DIP                 | 201210   | 0                        | L   | 0   | T                             |
|------------------|---------------------|--|--------------------------|---|---|-------------------------------|
| <u>Type code</u> | <u>Product code</u> | <u>Dimension code</u>  | <u>Unit of dimension</u> | <u>Application</u>                              | <u>Specification</u>  | <u>Packing</u>                |
| RF device        | DIP : Diplexer      | Per 2 digits of Length, Width, Thickness<br>201210 =<br>Length =20<br>Width = 12<br>Thickness = 10 | 0 : 0.1 mm<br>1 : 1.0 mm | L : 2.4/4.9/5.2/5.8GHz<br>Multiband Application | Code from 0~9<br>dependent on different<br>electrical specification | T : 7" Reeled<br>G:13" Reeled |

■ TRIPLEXER

| RF               | TIP                 | 2109   | A                 | T                        | M0T63                |
|------------------|---------------------|--|-------------------|--------------------------|----------------------|
| <u>Type code</u> | <u>Product code</u> | <u>Dimension code</u>  | <u>Pin Define</u> | <u>Application</u>       | <u>Specification</u> |
| RF device        | TIP : Triplexer     | Per 2 digits of Length, Width, Thickness<br>e.g. :<br>21 =<br>Length 2.0 mm,<br>Width 1.2 mm,<br>09=<br>Thickness 0.9 mm | Design Code       | T: GPS/ ISM 2.4GHz/5 GHz | Design Code          |

■ COMMON MODE FILTER

| RF               | CMF                      | 122010   | 0                        | M                    | 3   | T              |
|------------------|--------------------------|--|--------------------------|----------------------|---|----------------|
| <u>Type code</u> | <u>Product code</u>      | <u>Dimension code</u>  | <u>Unit of dimension</u> | <u>Application</u>   | <u>Specification</u>  | <u>Packing</u> |
| RF/RG:<br>device | CMF : Common Mode Filter | Per 2 digits of Length, Width.<br>122010 =<br>Length =12<br>Width = 20<br>Thickness = 10 | 0 : 0.1 mm<br>1 : 1.0 mm | M: USB 2.0/ IEEE1394 | Code from 0~9<br>dependent on different<br>electrical specification | T : 7" Reeled  |

■ COUPLER

| RF               | CPL                 | 18  | 10                     | B           | 2450               | T              |
|------------------|---------------------|---|------------------------|-------------|--------------------|----------------|
| <u>Type code</u> | <u>Product code</u> | <u>Dimension code</u>   | <u>Coupling Factor</u> | <u>Unit</u> | <u>Application</u> | <u>Packing</u> |
| RF device        | Coupler             | e.g. :<br>18 =<br>Length 16,<br>Width 08,<br>15=<br>Length 10,<br>Width 05, | 10 dB                  | dB          | 2.4 GHZ ISM Band   | T : 7" Reeled  |

■ SAW FILTER

| SF                                  | 1411  | 2595                       | B38                | 03                   | T              |
|-------------------------------------|---|----------------------------|--------------------|----------------------|----------------|
| <u>Product code</u>                 | <u>Dimension code</u>   | <u>Frequency</u>           | <u>Application</u> | <u>Serial Number</u> | <u>Packing</u> |
| SF:SAW Filter<br>DF:SAW<br>DUPLEXER | Per 2 digits of Length, Width<br>1411=<br>Length 1.4mm<br>Width 1.1mm | 2595:Center Freq (2595MHz) | B38:Band38         | Design Code          | T: 7" Reeled   |

■ ANTENNA SWITCH

| RF               | ASW                 | D                  | H2418A               | T              |
|------------------|---------------------|--------------------|----------------------|----------------|
| <u>Type code</u> | <u>Product code</u> | <u>Application</u> | <u>Serial Number</u> | <u>Packing</u> |
| RF device        | ASW: Antenna Switch | D: SP8T            | Design Code          | T: 7" Reeled   |

■ ANTENNA SWITCH MODULE

| RM                             | ASM                        | N                  | T1492A               | T              |
|--------------------------------|----------------------------|--------------------|----------------------|----------------|
| <u>Type code</u>               | <u>Product code</u>        | <u>Application</u> | <u>Serial Number</u> | <u>Packing</u> |
| RM:<br>Walsin RF Module Device | ASM: Antenna Switch Module | N: SP16T           | Design Code          | T: 7" Reeled   |

■ Dipole Antenna

| RF        | DPA                  | 8709  | 00                                       | S   | B   | A  | B                                     | 8   | 01                  |
|-----------|----------------------|---|--|---|---|--|---------------------------------------|---|---------------------|
| Type code | Product code         | Dimension code  | Cable Length code                        | Connector Brand code  | Type of Connector code  | Application code   | Project status code                   | Wire Diameter code  | Project code        |
| RF device | DPA : Dipole Antenna | Per 2 digits of Length, Width 8709 = Length = 87 Width = 9.95 | 2 digits for cable length 00= None Cable | A: N<br>C:MCX<br>D:IPEX III<br>E: IPEX IV<br>F: IPEX A13<br>H: Hirose<br>I: IPEX<br>K:F<br>M: MMCX<br>S: SMA<br>T: TNC<br>U:MURATA<br>N: None | A: Reverse Female<br>B: Reverse Male<br>F: Female<br>M: Male<br>N: None | 0: 0GHz<br>5: 5 GHz<br>A: 2.4GHz ISM band<br>B: GSM 900/1800 dual band<br>G: GPS band<br>L: 2.4/5.2/5.8 GHz tri-band<br>T:LTE band<br>U:UHF<br>W: WCDMA band | B: MP<br>T:During Test<br>X: Pile Run | 0:None<br>1:Ø0.81<br>2:Ø1.32<br>3:Ø1.13<br>4:Low LossØ1.13<br>5:Ø0.50<br>6:RG316<br>7:Ø1.37<br>8:RG178<br>9:Low LossØ1.37<br>A:RG174<br>B:1.5C-2V | 01~99 series number |

■ PCB Antenna

| RF        | PCA               | 4305   | 10   | N   | N   | A  | B                                     | 4  | 01                  |
|-----------|-------------------|--|--|---|---|--|---------------------------------------|--|---------------------|
| Type code | Product code      | Dimension code   | Cable Length code                                | Connector Brand code  | Type of Connector code  | Application code   | Project status code                   | Wire Diameter code   | Project code        |
| RF device | PCA : PCB Antenna | Per 2 digits of Length, Width 4305 = Length = 43 Width = 5 | 2 digits for cable length 10= Cable Length: 10cm | A: N<br>C:MCX<br>D:IPEX III<br>E: IPEX IV<br>F: IPEX A13<br>H: Hirose<br>I: IPEX<br>K:F<br>M: MMCX<br>S: SMA<br>T: TNC<br>U:MURATA<br>N: None | A: Reverse Female<br>B: Reverse Male<br>F: Female<br>M: Male<br>N: None | 0: 0GHz<br>5: 5 GHz<br>A: 2.4GHz ISM band<br>B: GSM 900/1800 dual band<br>G: GPS band<br>L: 2.4/5.2/5.8 GHz tri-band<br>T:LTE band<br>U:UHF<br>W: WCDMA band | B: MP<br>T:During Test<br>X: Pile Run | 0:None<br>1:Ø0.81<br>2:Ø1.32<br>3:Ø1.13<br>4:Low LossØ1.13<br>5:Ø0.50<br>6:RG316<br>7:Ø1.37<br>8:RG178<br>9: Low LossØ1.37<br>A:RG174<br>B:1.5C-2V | 01~99 series number |

■ FPA Antenna

| RF        | FPA               | 3025  | 10   | I   | M   | A  | B                                     | 3  | 01                  |
|-----------|-------------------|---|--|---|---|--|---------------------------------------|--|---------------------|
| Type code | Product code      | Dimension code  | Cable Length code                                | Connector Brand code  | Type of Connector code  | Application code   | Project status code                   | Wire Diameter code   | Project code        |
| RF device | FPA : FPA Antenna | Per 2 digits of Length, Width 3025 = Length = 30 Width = 25 | 2 digits for cable length 10= Cable Length: 10cm | A: N<br>C:MCX<br>D:IPEX III<br>E: IPEX IV<br>F: IPEX A13<br>H: Hirose<br>I: IPEX<br>K:F<br>M: MMCX<br>S: SMA<br>T: TNC<br>U:MURATA<br>N: None | A: Reverse Female<br>B: Reverse Male<br>F: Female<br>M: Male<br>N: None | 0: 0GHz<br>5: 5 GHz<br>A: 2.4GHz ISM band<br>B: GSM 900/1800 dual band<br>G: GPS band<br>L: 2.4/5.2/5.8 GHz tri-band<br>T:LTE band<br>U:UHF<br>W: WCDMA band | B: MP<br>T:During Test<br>X: Pile Run | 0:None<br>1:Ø0.81<br>2:Ø1.32<br>3:Ø1.13<br>4:Low LossØ1.13<br>5:Ø0.50<br>6:RG316<br>7:Ø1.37<br>8:RG178<br>9: Low LossØ1.37<br>A:RG174<br>B:1.5C-2V | 01~99 series number |

■ Metal Antenna

| RF        | MTA                 | 3109   | 10   | I   | M   | L  | B                                     | 7  | 01                  |
|-----------|---------------------|--|--|---|---|--|---------------------------------------|--|---------------------|
| Type code | Product code        | Dimension code   | Cable Length code                                | Connector Brand code  | Type of Connector code  | Application code   | Project status code                   | Wire Diameter code   | Project code        |
| RF device | MTA : Metal Antenna | Per 2 digits of Length, Width 3109 = Length = 31 Width = 9 | 2 digits for cable length 10= Cable Length: 10cm | A: N<br>C:MCX<br>D:IPEX III<br>E: IPEX IV<br>F: IPEX A13<br>H: Hirose<br>I: IPEX<br>K:F<br>M: MMCX<br>S: SMA<br>T: TNC<br>U:MURATA<br>N: None | A: Reverse Female<br>B: Reverse Male<br>F: Female<br>M: Male<br>N: None | 0: 0GHz<br>5: 5 GHz<br>A: 2.4GHz ISM band<br>B: GSM 900/1800 dual band<br>G: GPS band<br>L: 2.4/5.2/5.8 GHz tri-band<br>T:LTE band<br>U:UHF<br>W: WCDMA band | B: MP<br>T:During Test<br>X: Pile Run | 0:None<br>1:Ø0.81<br>2:Ø1.32<br>3:Ø1.13<br>4:Low LossØ1.13<br>5:Ø0.50<br>6:RG316<br>7:Ø1.37<br>8:RG178<br>9: Low LossØ1.37<br>A:RG174<br>B:1.5C-2V | 01~99 series number |

■ Cable Assembly

| RF        | CBA                  | 1613  | 10   | I   | M   | 3                             | B                                     | 7  | 01                  |
|-----------|----------------------|---|--|---|---|-------------------------------|---------------------------------------|--|---------------------|
| Type code | Product code         | Dimension code  | Cable Length code                                | Connector Brand code  | Type of Connector code  | Application code              | Project status code                   | Wire Diameter code   | Project code        |
| RF device | CBA : Cable Assembly | Per 2 digits of Length, Width 1613 = Length = 16.8 Width = 13.7 | 2 digits for cable length 10= Cable Length: 10cm | A: N<br>C:MCX<br>D:IPEX III<br>E: IPEX IV<br>F: IPEX A13<br>H: Hirose<br>I: IPEX<br>K:F<br>M: MMCX<br>S: SMA<br>T: TNC<br>U:MURATA<br>N: None | A: Reverse Female<br>B: Reverse Male<br>F: Female<br>M: Male<br>N: None | 0: 0GHz<br>3: 3GHz<br>6: 6GHz | B: MP<br>T:During Test<br>X: Pile Run | 0:None<br>1:Ø0.81<br>2:Ø1.32<br>3:Ø1.13<br>4:Low LossØ1.13<br>5:Ø0.50<br>6:RG316<br>7:Ø1.37<br>8:RG178<br>9: Low LossØ1.37<br>A:RG174<br>B:1.5C-2V | 01~99 series number |

■ Connector

| RF        | CON             | 0201  | 00                                       | D   | F   | 6                             | B                                     | 0  | 01                  |
|-----------|-----------------|---|--|---|---|-------------------------------|---------------------------------------|--|---------------------|
| Type code | Product code    | Dimension code  | Cable Length code                        | Connector Brand code  | Type of Connector code  | Application code              | Project status code                   | Wire Diameter code   | Project code        |
| RF device | CON : Connector | Per 2 digits of Length, Width 0201 = Length = 2.05 Width = 1.40 | 2 digits for cable length 00= None Cable | A: N<br>C:MCX<br>D:IPEX III<br>E: IPEX IV<br>F: IPEX A13<br>H: Hirose<br>I: IPEX<br>K:F<br>M: MMCX<br>S: SMA<br>T: TNC<br>U:MURATA<br>N: None | A: Reverse Female<br>B: Reverse Male<br>F: Female<br>M: Male<br>N: None | 0: 0GHz<br>3: 3GHz<br>6: 6GHz | B: MP<br>T:During Test<br>X: Pile Run | 0:None<br>1:Ø0.81<br>2:Ø1.32<br>3:Ø1.13<br>4:Low LossØ1.13<br>5:Ø0.50<br>6:RG316<br>7:Ø1.37<br>8:RG178<br>9: Low LossØ1.37<br>A:RG174<br>B:1.5C-2V | 01~99 series number |

■ NFC Antenna

| RF        | NFC                                    | 0201  | 00                                       | N   | N   | N                | B                                     | 0  | 01                  |
|-----------|--|---|--|---|---|------------------|---------------------------------------|--|---------------------|
| Type code | Product code                           | Dimension code  | Cable Length code                        | Connector Brand code  | Type of Connector code  | Application code | Project status code                   | Wire Diameter code   | Project code        |
| RF device | NFC : Near Field Communication Antenna | Per 2 digits of Length, Width 5339 = Length = 53.7 Width = 39.7 | 2 digits for cable length 00= None Cable | A: N<br>C:MCX<br>D:IPEX III<br>E: IPEX IV<br>F: IPEX A13<br>H: Hirose<br>I: IPEX<br>K:F<br>M: MMCX<br>S: SMA<br>T: TNC<br>U:MURATA<br>N: None | A: Reverse Female<br>B: Reverse Male<br>F: Female<br>M: Male<br>N: None | N: NFC           | B: MP<br>T:During Test<br>X: Pile Run | 0:None<br>1:Ø0.81<br>2:Ø1.32<br>3:Ø1.13<br>4:Low LossØ1.13<br>5:Ø0.50<br>6:RG316<br>7:Ø1.37<br>8:RG178<br>9: Low LossØ1.37<br>A:RG174<br>B:1.5C-2V | 01~99 series number |

■ WPC Antenna



| RF        | WPC                                   | 5830  | 00                                       | N   | N   | N                | B                                     | 0  | 01                  |
|-----------|---------------------------------------|---|--|---|---|------------------|---------------------------------------|--|---------------------|
| Type code | Product code                          | Dimension code  | Cable Length code                        | Connector Brand code  | Type of Connector code  | Application code | Project status code                   | Wire Diameter code   | Project code        |
| RF device | WPC : Wireless Power Charging Antenna | Per 2 digits of Length, Width 5830 = Length = 58 Width = 30 | 2 digits for cable length 00= None Cable | A: N<br>C:MCX<br>D:IPEX III<br>E: IPEX IV<br>F: IPEX A13<br>H: Hirose<br>I: IPEX<br>K:F<br>M: MMCX<br>S: SMA<br>T: TNC<br>U:MURATA<br>N: None | A: Reverse Female<br>B: Reverse Male<br>F: Female<br>M: Male<br>N: None | N: NFC           | B: MP<br>T:During Test<br>X: Pile Run | 0:None<br>1:Ø0.81<br>2:Ø1.32<br>3:Ø1.13<br>4:Low LossØ1.13<br>5:Ø0.50<br>6:RG316<br>7:Ø1.37<br>8:RG178<br>9: Low LossØ1.37<br>A:RG174<br>B:1.5C-2V | 01~99 series number |

Remark:

1. Central Frequency should be defined after customers' application approval.

CHIP ANTENNA

■ STRUCTURE AND PIN ASSOCIATED

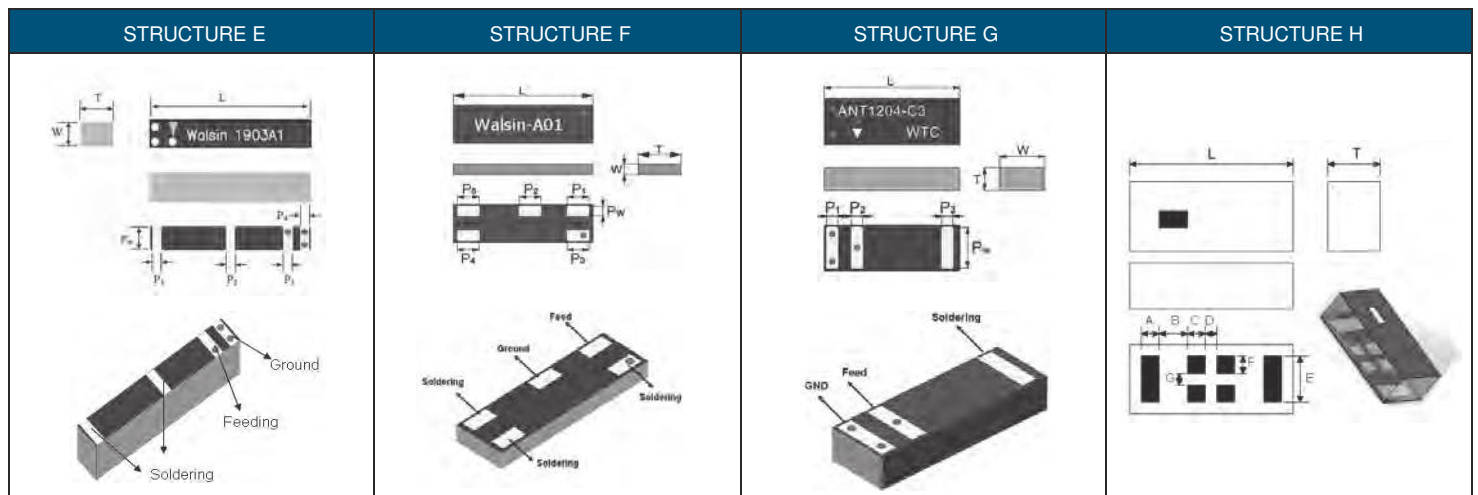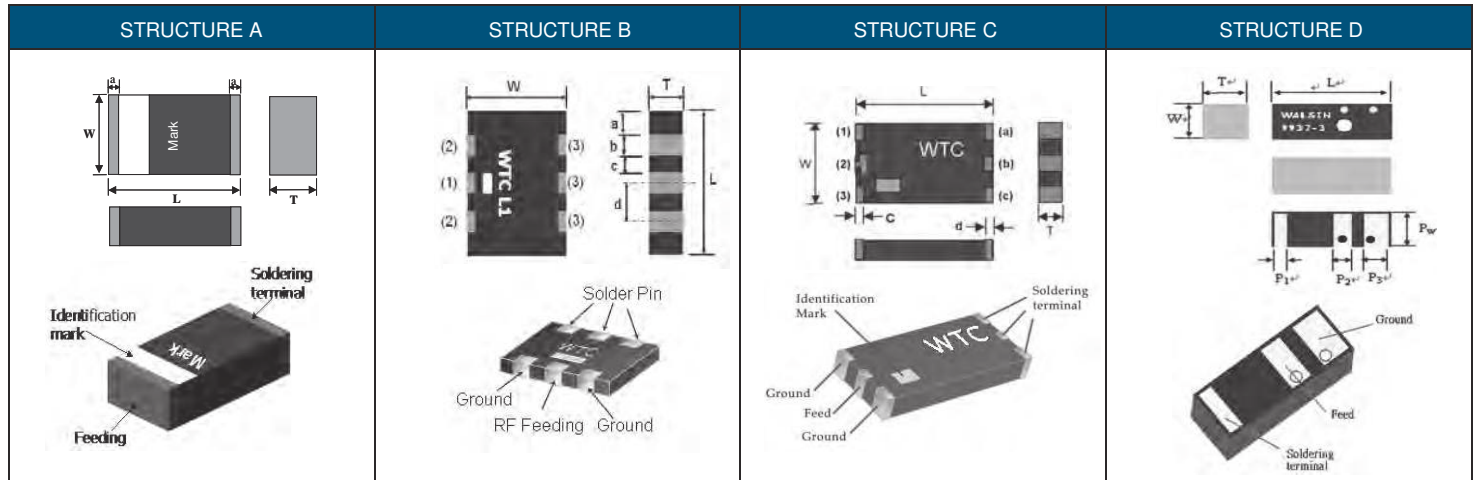

■ STRUCTURE AND DIMENSION

Unit: mm

| Structure\Dimension | L                  | W                  | T                  | a           | b            | c         | d         | 1         | 2         | 3          |
|---------------------|--------------------|--------------------|--------------------|-------------|--------------|-----------|-----------|-----------|-----------|------------|
| A                   | 10 ± 0.20          | 3.2 ± 0.20         | 0.8 ± 0.10         | 0.8 ± 0.10  |              |           |           |           |           |            |
|                     | 2.0 ± 0.20         | 1.25 ± 0.20        | 0.90 ± 0.10        | 0.25 ± 0.15 | -            | -         | -         | -         | -         | -          |
|                     | 3.20 ± 0.20        | 1.60 ± 0.20        | 0.60 ± 0.10        | 0.25 ± 0.20 | -            | -         | -         | -         | -         | -          |
|                     |                    |                    | 1.20 ± 0.10        | 0.25 ± 0.15 | -            | -         | -         | -         | -         | -          |
|                     | 5.20 ± 0.20        | 2.00 ± 0.20        | 1.30 ± 0.20        | 0.40 ± 0.20 | -            | -         | -         | -         | -         | -          |
|                     |                    |                    | 1.15 ± 0.10        | 0.40 ± 0.25 | -            | -         | -         | -         | -         | -          |
|                     | 5.8 ± 0.1<br>- 0.3 | 3.0 ± 0.1<br>- 0.3 | 1.1 ± 0.2<br>- 0.1 | 0.4 ± 0.25  | -            | -         | -         | -         | -         | -          |
|                     | 8.00 ± 0.20        | 1.05 ± 0.20        | 0.80 ± 0.10        | 0.30 ± 0.20 | -            | -         | -         | -         | -         | -          |
|                     | 9.10 ± 0.20        | 3.00 ± 0.20        | 2.00 ± 0.10        | 0.20 ± 0.20 | -            | -         | -         | -         | -         | -          |
|                     | 9.50 ± 0.20        | 2.10 ± 0.20        | 1.15 ± 0.10        | 0.50 ± 0.30 | -            | -         | -         | -         | -         | -          |
|                     | 1.60 ± 0.20        | 0.80 ± 0.20        | 0.50 ± 0.10        | 0.10 ± 0.05 |              |           |           |           |           |            |
| 2.00 ± 0.20         | 1.20 ± 0.20        | 0.50 ± 0.10        | 0.15 ± 0.05        |             |              |           |           |           |           |            |
| 12.00 ± 0.15        | 4.00 ± 0.15        | 1.60 ± 0.15        | 4.00 ± 0.15        | 0.80 ± 0.10 | 10.40 ± 0.15 |           |           |           |           |            |
| B                   | 5.9 ± 0.3          | 5.1 ± 0.3          | 1.1 ± 0.1          | 0.45 ± 0.2  | 1.0 ± 0.2    | 1.0 ± 0.2 | 2.0 ± 0.2 | 1.0 ± 0.2 | 1.0 ± 0.2 | 1.0 ± 0.2  |
| C                   | 7.6 ± 0.3          | 3.5 ± 0.2          | 1.1 ± 0.1          | 0.8 ± 0.2   | 0.8 ± 0.2    | 0.8 ± 0.2 | 0.5 ± 0.2 | 0.5 ± 0.2 | 0.8 ± 0.2 | 0.50 ± 0.2 |

| Structure\Dimension | L         | W         | T         | PW        | P1       | P2       | P3       | P4       | P5       |
|---------------------|-----------|-----------|-----------|-----------|----------|----------|----------|----------|----------|
| D                   | 9.90±0.15 | 3.70±0.15 | 3.80±0.20 | 3.48±0.10 | 1.4±0.10 | 1.9±0.10 | 2.4±0.15 | -        | -        |
| E                   | 19.0±0.15 | 3.00±0.15 | 3.80±0.20 | 3.00±0.10 | 1.0±0.10 | 1.0±0.10 | 1.0±0.10 | 1.0±0.10 | -        |
| F                   | 12.8±0.15 | 3.90±0.15 | 1.10±0.10 | 1.00±0.10 | 2.0±0.10 | 2.0±0.10 | 2.0±0.10 | 2.0±0.10 | 2.0±0.10 |
| G                   | 12.0±0.15 | 4.00±0.15 | 2.00±0.10 | 3.60±0.10 | 1.0±0.10 | 1.0±0.10 | 1.0±0.10 | -        | -        |
| H                   | 9.90±0.15 | 3.70±0.15 | 3.80±0.20 | 3.48±0.10 | 1.4±0.10 | 1.9±0.10 | 2.4±0.15 | -        | -        |



■ ELECTRICAL SPECIFICATION

1.575GHz BAND WORKING FREQUENCY

| Part Number     | Frequency Range (GHz) | Azimuth Beamwidth ( MHz ) | Gain (dBi) | VSWR (max.) | Impedance (Ω) | Polarization | Size (mm)      | Structure |
|-----------------|-----------------------|---------------------------|------------|-------------|---------------|--------------|----------------|-----------|
| RFANT5830110E0T | 1.575                 | Omni-directional          | 0 ~ 2      | 2.0         | 50            | Linear       | 5.80x3.00x1.10 | A         |
| RFECA1003011E0T | 1.575                 | Omni-directional          | 2 ~ 3      | 2.0         | 50            | Linear       | 10.0x3.20x0.80 | A         |
| RFECA3216060E=T | 1.575                 | Omni-directional          | 3          | 2.0         | 50            | Linear       | 3.20x1.60x0.60 | A         |

Bluetooth/WiFi BAND WORKING FREQUENCY

| Part Number     | Frequency Range (GHz) | Azimuth Beamwidth ( MHz ) | Gain (dBi) | VSWR (max.) | Impedance (Ω) | Polarization | Size (mm)       | Structure |
|-----------------|-----------------------|---------------------------|------------|-------------|---------------|--------------|-----------------|-----------|
| RFECA3216060L1T | 2.4~2.5<br>5.25~5.85  | Omni-directional          | 0.6/2      | 2.1         | 50            | Linear       | 3.20x1.60x0.60  | A         |
| RFANT6050110L0T | 2.4~2.5<br>4.9~5.9    | Omni-directional          | 4          | 2.0         | 50            | Linear       | 5.90x5.10x1.10  | B         |
| RFANT6050110L1T | 2.4~2.5<br>4.9~5.9    | Omni-directional          | 4          | 2.0         | 50            | Linear       | 5.90x5.10x1.10  | B         |
| RFANT2012090A0T | 2.4~2.5               | Omni-directional          | 1.72       | 2.0         | 50            | Linear       | 2.00x1.25x0.90  | A         |
| RFANT3216120A1T | 2.4~2.5               | Omni-directional          | 2          | 2.0         | 50            | Linear       | 3.20x1.60x1.20  | A         |
| RFANT3216120A3T | 2.4~2.5               | Omni-directional          | 2          | 2.0         | 50            | Linear       | 3.20x1.60x1.20  | A         |
| RFANT3216120A5T | 2.4~2.5               | Omni-directional          | 2          | 2.0         | 50            | Linear       | 3.20x1.60x1.20  | A         |
| RFANT5220110A0T | 2.4~2.5               | Omni-directional          | 2          | 2.0         | 50            | Linear       | 5.20x2.00x1.10  | A         |
| RFANT5220110A2T | 2.4~2.5               | Omni-directional          | 2          | 2.0         | 50            | Linear       | 5.20x2.00x1.10  | A         |
| RFANT7635110A1T | 2.4~2.5               | Omni-directional          | 0 ~ 2      | 2.0         | 50            | Linear       | 7.60x3.50x1.10  | C         |
| RFANT8010080A3T | 2.4~2.5               | Omni-directional          | 2          | 2.0         | 50            | Linear       | 8.00x1.00x0.80  | A         |
| RFANT9520120A0T | 2.4~2.5               | Omni-directional          | 2          | 2.0         | 50            | Linear       | 9.50x2.00x1.20  | A         |
| RFECA3216060A1T | 2.4~2.5               | Omni-directional          | 2          | 2.1         | 50            | Linear       | 3.20x1.60x0.60  | A         |
| RFECA3216060K1T | 4.9~5.85              | Omni-directional          | 2.8        | 2.0         | 50            | Linear       | 3.20x1.60x0.60  | A         |
| RFANT9030200A1T | 2.4~2.4835            | Omni-directional          | 2          | 2.1         | 50            | Linear       | 9.00x 3.00x2.00 | A         |
| RGFRA1903041A1T | 2.4~2.5               | Omni-directional          | 2          | 2.0         | 50            | Linear       | 19.0x3.00x3.80  | E         |
| RGFRA1903041A5T | 2.4~2.5               | Omni-directional          | 2          | 2.0         | 50            | Linear       | 19.0x3.00x3.80  | E         |
| RGFRA9937380A3T | 2.4~2.55              | Omni-directional          | 2          | 2.0         | 50            | Linear       | 9.90x3.70x3.80  | D         |
| RGFRA1304011A1T | 2.4~2.5               | Omni-directional          | 2          | 2.1         | 50            | Linear       | 12.8x3.90x1.10  | F         |
| RGFRA1204021A1T | 2.4~2.5               | Omni-directional          | 2          | 2.0         | 50            | Linear       | 12.0x4.00x2.00  | G         |
| RFANT2012090A0T | 2.4~2.5               | Omni-directional          | 2          | 2.0         | 50            | Linear       | 2.00x1.25x0.90  | A         |
| RFECA1608050A0T | 2.4~2.5               | Omni-directional          | 0.7        | 3.0         | 50            | Linear       | 1.60x0.80x0.50  | A         |
| RFECA2012050A3T | 2.4~2.5               | Omni-directional          | 0.29       | 2.6         | 50            | Linear       | 2.00x1.20x0.5   | A         |

WiMAX BAND WORKING FREQUENCY

| Part Number     | Frequency Range (GHz) | Azimuth Beamwidth (MHz ) | Gain (dBi) | VSWR (max.) | Impedance (Ω) | Polarization | Size (mm)      | Structure |
|-----------------|-----------------------|--------------------------|------------|-------------|---------------|--------------|----------------|-----------|
| RFANT32162G6W0T | 2.5~2.69              | Omni-directional         | 1          | 3.0         | 50            | Linear       | 3.20x1.60x1.20 | A         |
| RFANT32163G5W0T | 3.3~3.8               | Omni-directional         | 2~3        | 2.0         | 50            | Linear       | 3.20x1.60x1.20 | A         |

UHF BAND WORKING FREQUENCY

| Part Number     | Frequency Range (MHz) | Azimuth Beamwidth (MHz ) | Gain (dBi) | VSWR (max.) | Impedance (Ω) | Polarization | Size (mm)       | Structure |
|-----------------|-----------------------|--------------------------|------------|-------------|---------------|--------------|-----------------|-----------|
| RGFRA1204011DCT | 900~930               | Omni-directional         | 1          | 2.0         | 50            | Linear       | 12.00x4.00x1.60 | A         |
| RGFRA1204011DET | 855~885               | Omni-directional         | 1          | 2.0         | 50            | Linear       | 12.00x4.00x1.60 | A         |

- For more information, please contact with local sales representative
- All specifications are subject to change without notice
















■ TYPICAL ELECTRICAL CHARACTERISTICS
















| RFANT5220110A0T   |  |  |  |
|-------------------|--|--|--|
| Test Board        | X-Y Plane Vertical                                       | X-Z Plane Vertical                                     | Y-Z Plane Vertical                                     |
|                   | <p>Peak Gain= -5.97dBi<br/>Average Gain=-3.12 dBi</p>    | <p>Peak Gain= -5.97dBi<br/>Average Gain=-3.24 dBi</p>  | <p>Peak Gain= 1.69dBi<br/>Average Gain=-3.22 dBi</p>   |
| Return Loss (S11) | X-Y Plane Horizontal                                     | X-Z Plane Horizontal                                   | Y-Z Plane Horizontal                                   |
|                   | <p>Peak Gain= 2.59dBi<br/>Average Gain=-9.24 dBi</p>     | <p>Peak Gain= 2.66dBi<br/>Average Gain=-8.61 dBi</p>   | <p>Peak Gain= -5.42dBi<br/>Average Gain=-8.98 dBi</p>  |
| RGFAR1903041A1T   |  |  |  |
| Test Board        | X-Y Plane Vertical                                       | X-Z Plane Vertical                                     | Y-Z Plane Vertical                                     |
|                   | <p>Peak Gain= -7.42 dBi<br/>Average Gain= -10.48 dBi</p> | <p>Peak Gain= 1.95 dBi<br/>Average Gain= -0.81 dBi</p> | <p>Peak Gain= -0.26dBi<br/>Average Gain=-5 dBi</p>     |
| Return Loss (S11) | X-Y Plane Horizontal                                     | X-Z Plane Horizontal                                   | Y-Z Plane Horizontal                                   |
|                   | <p>Peak Gain= 2.0 dBi<br/>Average Gain= -2.31 dBi</p>    | <p>Peak Gain= -2.65 dBi<br/>Average Gain= -8.4dBi</p>  | <p>Peak Gain= 1.11dBi<br/>Average Gain = -4.37 dBi</p> |

| RFANT8010080A3T   |   |  |  |
|---|---|--|--|
| <p><b>Test Board</b></p>                                      | <p><b>X-Y Plane Vertical</b></p> <p>Peak Gain= 0.76 dBi<br/>Average Gain= -5.81dBi</p>    | <p><b>X-Z Plane Vertical</b></p> <p>Peak Gain= -3.76 dBi<br/>Average Gain= -8.72dBi</p>    | <p><b>Y-Z Plane Vertical</b></p> <p>Peak Gain = 3.03 dBi<br/>Average Gain = 0.71 dBi</p>   |
| <p><b>Return Loss (S11)</b></p>                               | <p><b>X-Y Plane Horizontal</b></p> <p>Peak Gain= 1.37 dBi<br/>Average Gain= -2.67 dBi</p> | <p><b>X-Z Plane Horizontal</b></p> <p>Peak Gain= -0.25 dBi<br/>Average Gain= -4.24 dBi</p> | <p><b>Y-Z Plane Horizontal</b></p> <p>Peak Gain= -1.37 dBi<br/>Average Gain= -8.6 dBi</p>  |
| RGFAR9937380A3T   |   |  |  |
| <p><b>Test Board</b></p>                                      | <p><b>X-Y Plane Vertical</b></p> <p>Peak Gain= -4.48 dBi<br/>Average Gain= -8.02 dBi</p>  | <p><b>X-Z Plane Vertical</b></p> <p>Peak Gain= 2.49 dBi<br/>Average Gain= -2.47 dBi</p>    | <p><b>Y-Z Plane Vertical</b></p> <p>Peak Gain= -4.05dBi<br/>Average Gain= -8.03 dBi</p>    |
| <p><b>Return Loss (S11)</b></p> <p>-10dB bandwidth 140MHz</p> | <p><b>X-Y Plane Horizontal</b></p> <p>Peak Gain= 3.19 dBi<br/>Average Gain= -2.65 dBi</p> | <p><b>X-Z Plane Horizontal</b></p> <p>Peak Gain= 3.05 dBi<br/>Average Gain= -4.10dBi</p>   | <p><b>Y-Z Plane Horizontal</b></p> <p>Peak Gain = 0.95dBi<br/>Average Gain = -4.26 dBi</p> |

| RFECA3216060A1T            |  |   |  |
|----------------------------|--|---|--|
| Test Board                 | X-Y Plane Vertical                                       | X-Z Plane Vertical                                      | Y-Z Plane Vertical                                       |
| <p>unit:mm</p>             | <p>Peak Gain = 3.37 dBi<br/>Average Gain = -0.65 dBi</p> | <p>Peak Gain= 0.83 dBi<br/>Average Gain= -1.35 dBi</p>  | <p>Peak Gain= -9.59 dBi<br/>Average Gain= -15.40 dBi</p> |
| Return Loss (S11)          | X-Y Plane Horizontal                                     | X-Z Plane Horizontal                                    | Y-Z Plane Horizontal                                     |
|                            | <p>Peak Gain= -4.62 dBi<br/>Average Gain=-10.42 dBi</p>  | <p>Peak Gain= 0.51 dBi<br/>Average Gain= -4.07 dBi</p>  | <p>Peak Gain= 1.39 dBi<br/>Average Gain= -2.07 dBi</p>   |
| RFECA1003011E0T            |  |   |  |
| Antenna S11 on Test Board  | X-Y Plane Vertical                                       | X-Z Plane Vertical                                      | Y-Z Plane Vertical                                       |
|                            | <p>Peak Gain = 3.12dBi<br/>Average Gain = -3.99 dBi</p>  | <p>Peak Gain= 1.97dBi<br/>Average Gain= -1.44 dBi</p>   | <p>Peak Gain = 3.32dBi<br/>Average Gain = 1.02 dBi</p>   |
| Antenna VSWR on Test Board | X-Y Plane Horizontal                                     | X-Z Plane Horizontal                                    | Y-Z Plane Horizontal                                     |
|                            | <p>Peak Gain = +0.48dBi<br/>Average Gain = -4.59dBi</p>  | <p>Peak Gain = +4.99dBi<br/>Average Gain = -1.31dBi</p> | <p>Peak Gain = +3.02dBi<br/>Average Gain = -0.85dBi</p>  |

| RFECA3216060E1T   |  |   |  |
|-------------------|--|---|--|
| Land Pattern      | X-Y Plane Vertical                                       | X-Z Plane Vertical                                      | Y-Z Plane Vertical                                       |
|                   | <p>Peak Gain= -5.51 dBi<br/>Average Gain= -7.48 dBi</p>  | <p>Peak Gain= -0.85 dBi<br/>Average Gain= -5.22 dBi</p> | <p>Peak Gain = 6.74 dBi<br/>Average Gain = 4.81 dBi</p>  |
| Return Loss (S11) | X-Y Plane Horizontal                                     | X-Z Plane Horizontal                                    | Y-Z Plane Horizontal                                     |
|                   | <p>Peak Gain= 5.36 dBi<br/>Average Gain= 1.25 dBi</p>    | <p>Peak Gain= 4.85 dBi<br/>Average Gain= 1.21 dBi</p>   | <p>Peak Gain= -6.99 dBi<br/>Average Gain= -14.30 dBi</p> |
| RFECA3216060K1T   |  |   |  |
| Land Pattern      | X-Y Plane Vertical                                       | X-Z Plane Vertical                                      | Y-Z Plane Vertical                                       |
|                   | <p>Peak Gain= -7.42 dBi<br/>Average Gain= -11.78 dBi</p> | <p>Peak Gain= 2.86 dBi<br/>Average Gain= 0.86 dBi</p>   | <p>Peak Gain= -0.55dBi<br/>Average Gain= -4.9 dBi</p>    |
| Return Loss (S11) | X-Y Plane Horizontal                                     | X-Z Plane Horizontal                                    | Y-Z Plane Horizontal                                     |
|                   | <p>Peak Gain= 2.3 dBi<br/>Average Gain= -1.1 dBi</p>     | <p>Peak Gain=-2.49 dBi<br/>Average Gain= -9.61dBi</p>   | <p>Peak Gain = 0.73dBi<br/>Average Gain = -2.86 dBi</p>  |

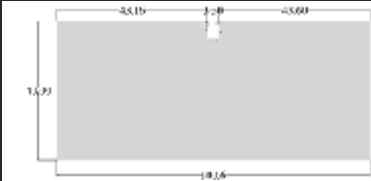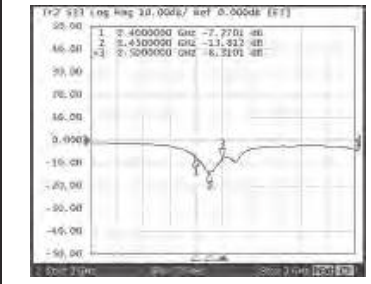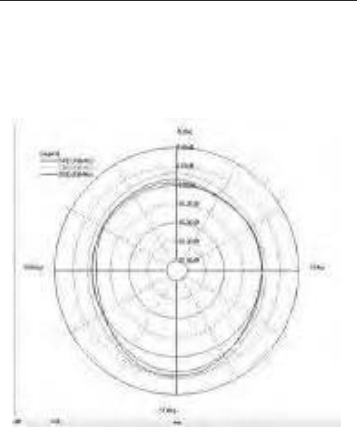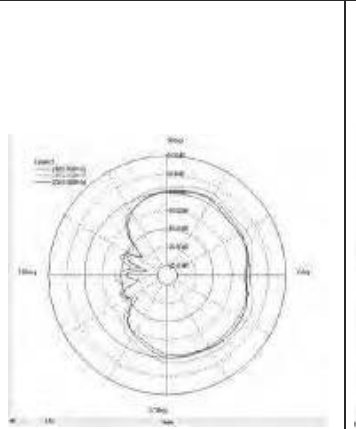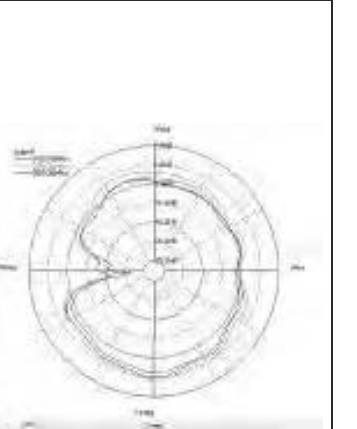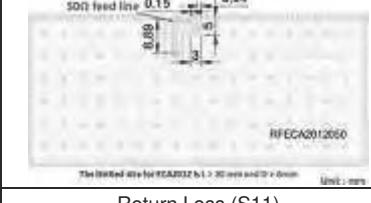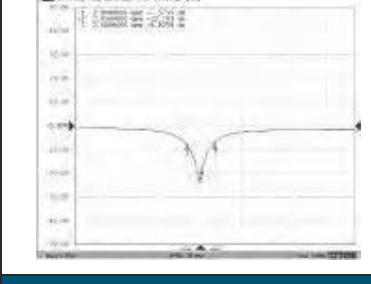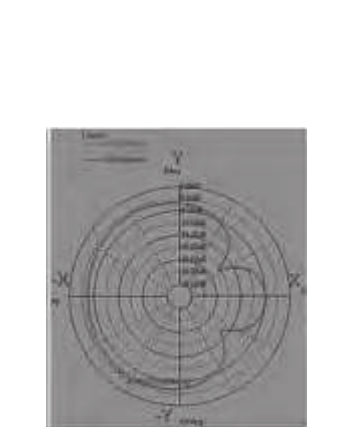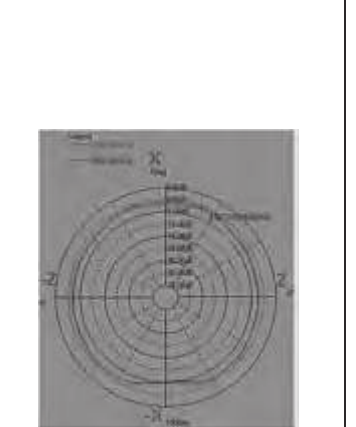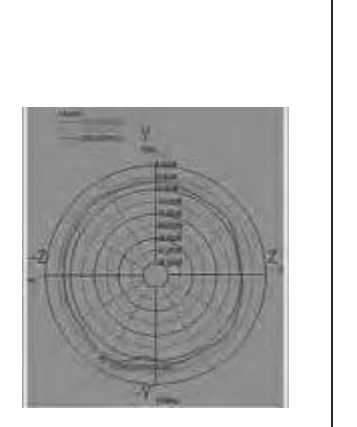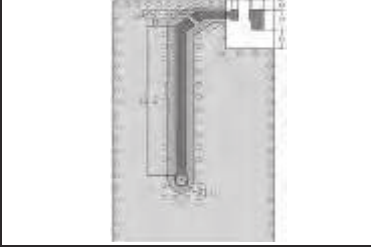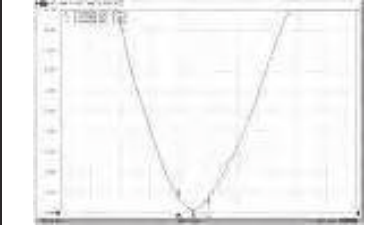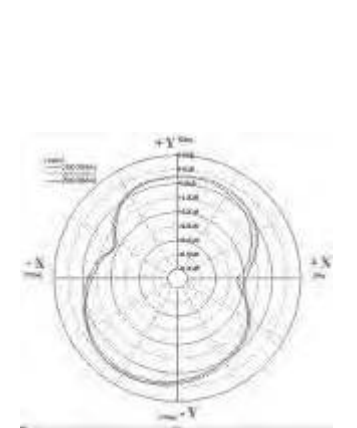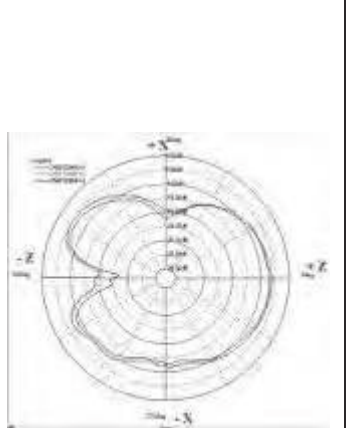
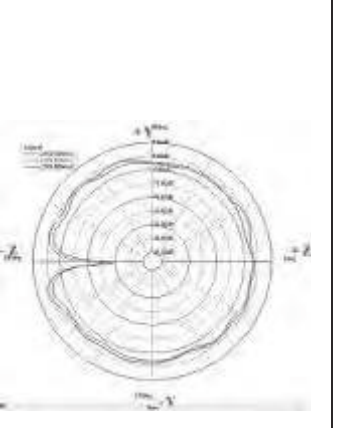
| RFECA1608050A0T  |   |  |   |
|--|---|--|---|
| Test Board   | X-Y Plane   | X-Z Plane  | Y-Z Plane   |
|  <p>Return Loss (S11)</p>      |  <p>Peak Gain= -0.65 dBi<br/>Average Gain= -2.38 dBi</p>   |  <p>Peak Gain= -2.12 dBi<br/>Average Gain= -5.11 dBi</p>   |  <p>Peak Gain= -0.67dBi<br/>Average Gain=-2.45 dBi</p>   |
| RFECA2012050A3T  |   |  |   |
| Test Board   | X-Y Plane   | X-Z Plane  | Y-Z Plane   |
|  <p>Return Loss (S11)</p>   |  <p>Peak Gain= -1.07 dBi<br/>Average Gain= -3.81 dBi</p>  |  <p>Peak Gain=0.29 dBi<br/>Average Gain= 0.89 dBi</p>     |  <p>Peak Gain= -0.03dBi<br/>Average Gain=-4.36 dBi</p>  |
| RFANT2012090A0T  |   |  |   |
| Test Board   | X-Y Plane   | X-Z Plane  | Y-Z Plane   |
|  <p>Return Loss (S11)</p>  |  <p>Peak Gain= -0.19 dBi<br/>Average Gain= -3.72 dBi</p> |  <p>Peak Gain= -0.23 dBi<br/>Average Gain= -4.23 dBi</p> |  <p>Peak Gain= -1.29dBi<br/>Average Gain=-1.46 dBi</p> |
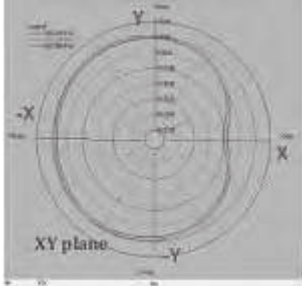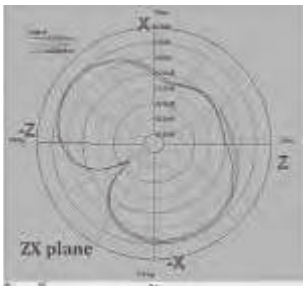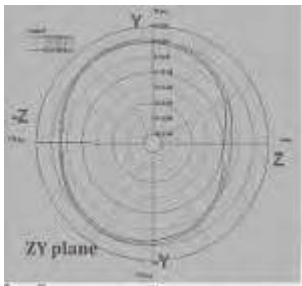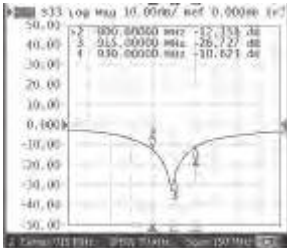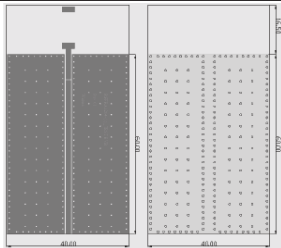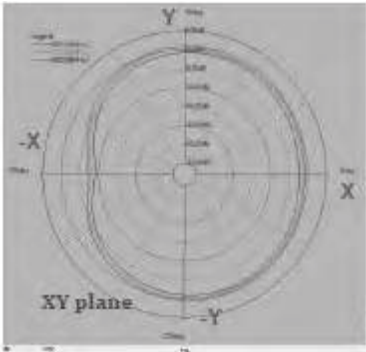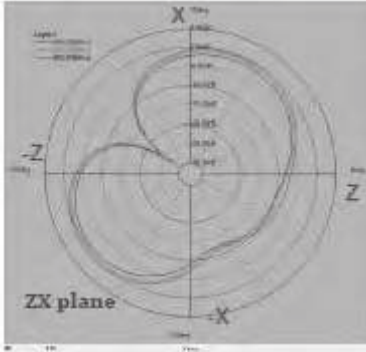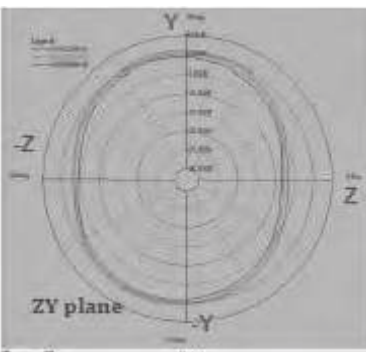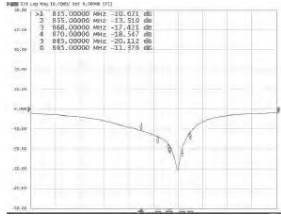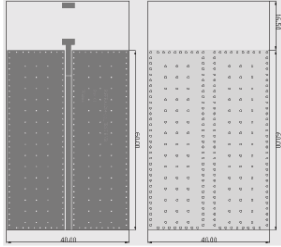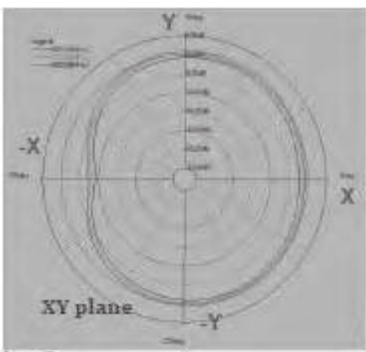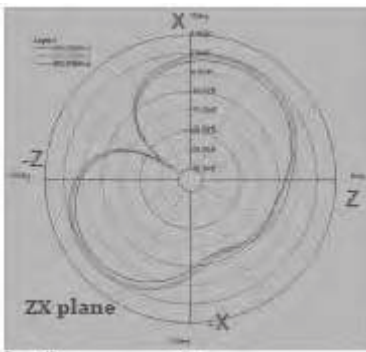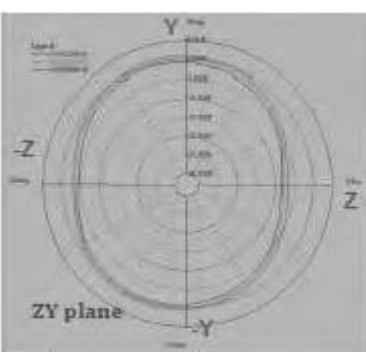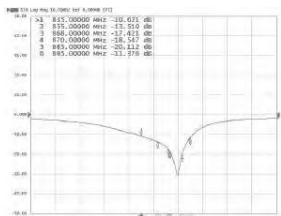
| RGFRA1204011DCT   |   |  |   |
|---|---|--|---|
| Test Board  | X-Y Plane   | X-Z Plane  | Y-Z Plane   |
|  <p>Clearance Area: 0.5 X 0.40 mm (16x13 mil)</p> |  <p>XY plane</p>   |  <p>ZX plane</p>   |  <p>ZY plane</p>   |
| <p>Return Loss (S11)</p>                          | <p>Peak Gain= -0.82 dBi<br/>Average Gain= -1.11 dBi</p>   | <p>Peak Gain= 0.56 dBi<br/>Average Gain= -3.41 dBi</p>   | <p>Peak Gain= 0.94dBi<br/>Average Gain=-1.48 dBi</p>  |
| RGFRA1204011DET   |   |  |   |
| Test Board  | X-Y Plane   | X-Z Plane  | Y-Z Plane   |
|    |  <p>XY plane</p> |  <p>ZX plane</p> |  <p>ZY plane</p> |
| <p>Return Loss (S11)</p>                        | <p>Peak Gain= -0.85 dBi<br/>Average Gain= -0.74 dBi</p>   | <p>Peak Gain= -1.06 dBi<br/>Average Gain= -3.01 dBi</p>  | <p>Peak Gain= -0.82dBi<br/>Average Gain=-1.29 dBi</p>   |
| RGFRA1204011DET   |   |  |   |
| Test Board  | X-Y Plane   | X-Z Plane  | Y-Z Plane   |
|   |  <p>XY plane</p> |  <p>ZX plane</p> |  <p>ZY plane</p> |
| <p>Return Loss (S11)</p>                        | <p>Peak Gain= -0.85 dBi<br/>Average Gain= -0.74 dBi</p>   | <p>Peak Gain= -1.06 dBi<br/>Average Gain= -3.01 dBi</p>  | <p>Peak Gain= -0.82dBi<br/>Average Gain=-1.29 dBi</p>   |

- For more information, please contact with local sales representative
- All specifications are subject to change without notice

HIGH FREQUENCY MULTILAYER BAND PASS FILTER

■ STRUCTURE AND PIN ASSOCIATED

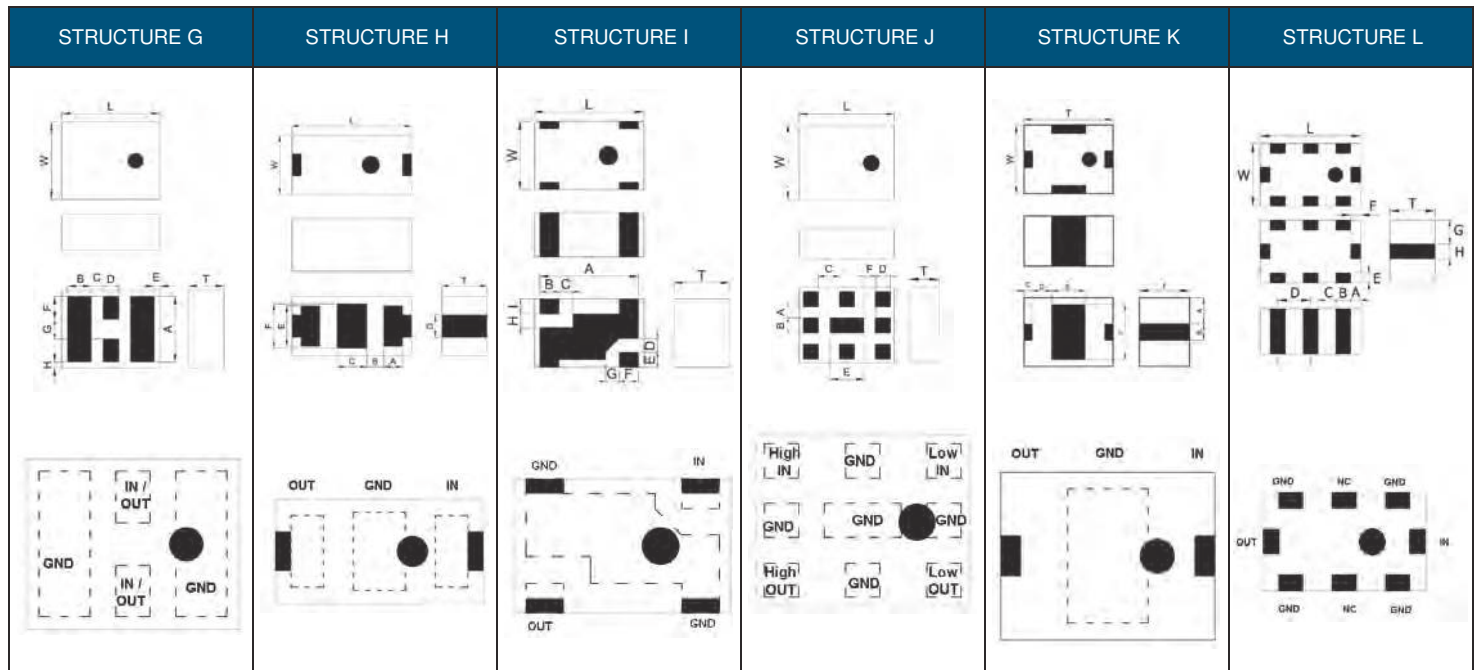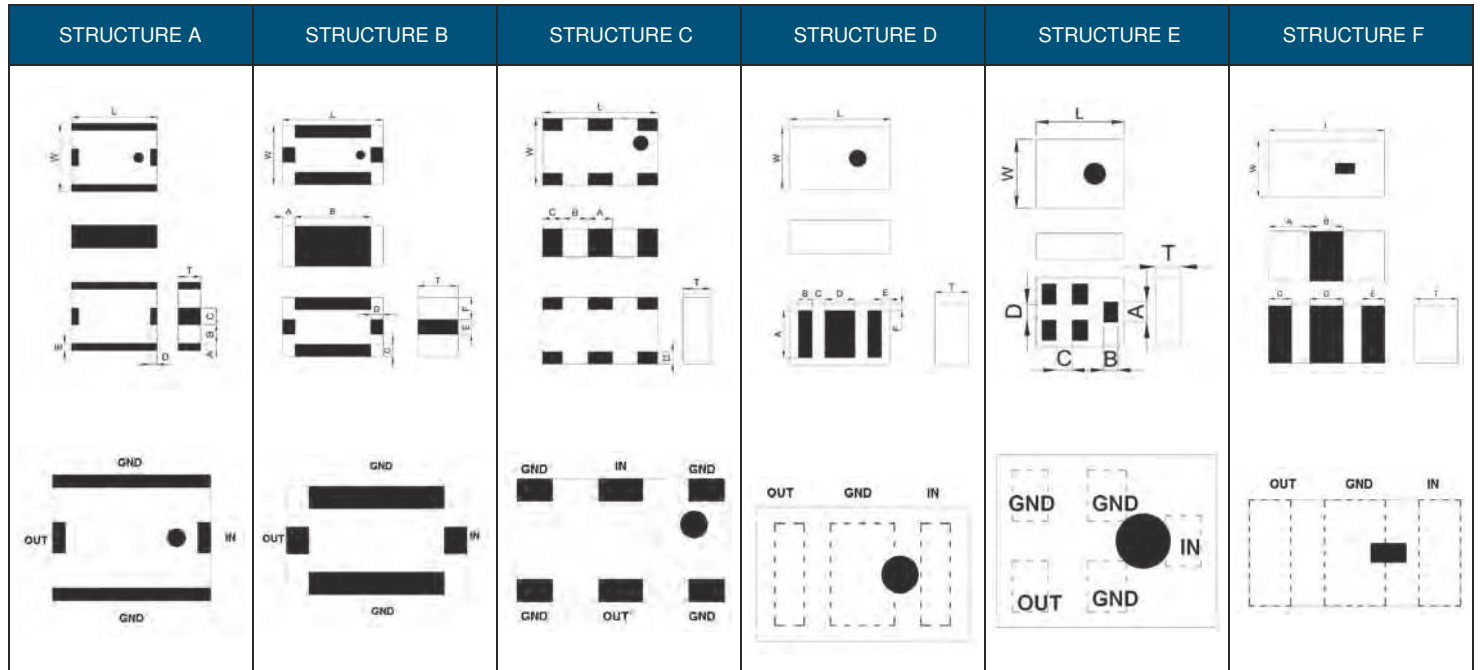



■ **STRUCTURE AND DIMENSION**

Unit: mm

| Structure Dimension | L         | W         | T         | A          | B          | C          | D         | E          | F          | G          | H          | I          |   |
|---------------------|-----------|-----------|-----------|------------|------------|------------|-----------|------------|------------|------------|------------|------------|---|
| A                   | 2.50±0.20 | 2.00±0.20 | 0.70±0.10 | 0.20±0.20  | 0.55±0.20  | 0.50±0.20  | 0.25±0.20 | 0.20±0.20  | -          | -          | -          | -          |   |
|                     |           |           | 0.90±0.10 | 0.20±0.20  | 0.55±0.20  | 0.50±0.20  | 0.20±0.20 | 0.20±0.20  | -          | -          | -          | -          |   |
|                     |           |           | 1.00±0.10 | 0.20±0.20  | 0.55±0.20  | 0.50±0.20  | 0.25±0.20 | 0.20±0.20  | -          | -          | -          | -          |   |
|                     |           |           | 1.05±0.10 | 0.25±0.20  | 0.50±0.20  | 0.50±0.20  | 0.25±0.20 | 0.25±0.20  | -          | -          | -          | -          |   |
|                     |           |           | 1.20±0.10 | 0.25±0.20  | 0.50±0.20  | 0.50±0.20  | 0.25±0.20 | 0.25±0.20  | -          | -          | -          | -          |   |
|                     | 2.05±0.20 | 0.70±0.20 | 0.25±0.20 | 0.50±0.20  | 0.50±0.20  | 0.25±0.20  | 0.25±0.20 | -          | -          | -          | -          |            |   |
| 3.20±0.20           | 2.50±0.10 | 1.50±0.10 | 0.20±0.20 | 0.75±0.20  | 0.60±0.20  | 0.20±0.15  | 0.40±0.20 | -          | -          | -          | -          |            |   |
| B                   | 1.00±0.10 | 0.50±0.10 | 0.40±0.10 | 0.35±0.10  | 0.30±0.10  | 0.15±0.10  | 0.15±0.10 | 0.30±0.10  | -          | -          | -          | -          |   |
|                     | 1.60±0.15 | 0.80±0.15 | 0.50±0.10 | 0.45±0.15  | 0.70±0.15  | 0.20±0.15  | 0.20±0.15 | 0.30±0.15  | 0.25±0.15  | -          | -          | -          |   |
|                     |           |           | 0.60±0.10 | 0.45±0.15  | 0.70±0.15  | 0.20±0.15  | 0.20±0.15 | 0.30±0.15  | 0.25±0.15  | -          | -          | -          |   |
|                     |           |           | 0.70±0.10 | 0.40±0.15  | 0.80±0.15  | 0.20±0.10  | 0.20±0.10 | 0.30±0.15  | 0.25±0.15  | -          | -          | -          |   |
|                     |           |           | 0.70±0.10 | 0.45±0.15  | 0.70±0.15  | 0.20±0.10  | 0.20±0.10 | 0.30±0.15  | 0.25±0.15  | -          | -          | -          |   |
|                     | 2.00±.15  | 1.20±0.15 | 0.90±0.10 | 0.50±0.10  | 0.40±0.15  | 0.80±0.15  | 0.20±0.10 | 0.20±0.10  | 0.30±0.15  | 0.45±0.15  | -          | -          | - |
|                     |           |           |           | 0.20±0.15  | 1.60±0.15  | 0.20±0.15  | 0.20±0.15 | 0.40±0.15  | 0.40±0.15  | -          | -          | -          |   |
|                     |           |           |           | 0.20±0.15  | 1.60±0.15  | 0.25±0.15  | 0.25±0.15 | 0.30±0.15  | 0.45±0.15  | -          | -          | -          |   |
|                     |           |           |           | 0.45±0.15  | 1.10±0.15  | 0.25±0.15  | 0.25±0.15 | 0.30±0.15  | 0.45±0.15  | -          | -          | -          |   |
|                     |           |           |           | 0.50±0.15  | 1.00±0.15  | 0.20±0.15  | 0.20±0.15 | 0.30±0.15  | 0.45±0.15  | -          | -          | -          |   |
|                     |           | 1.25±0.15 | 0.60±0.10 | 0.50±0.15  | 0.50±0.15  | 1.00±0.15  | 0.25±0.15 | 0.25±0.15  | 0.30±0.15  | 0.475±0.15 | -          | -          | - |
|                     |           |           |           |            | 0.80±0.10  | 0.50±0.15  | 1.00±0.15 | 0.25±0.15  | 0.25±0.15  | 0.30±0.15  | 0.475±0.15 | -          | - |
|                     |           |           |           |            | 0.90±0.10  | 0.50±0.15  | 1.00±0.15 | 0.25±0.15  | 0.25±0.15  | 0.30±0.15  | 0.475±0.15 | -          | - |
|                     |           |           |           |            | 0.95±0.10  | 0.35±0.15  | 1.30±0.15 | 0.20±0.15  | 0.20±0.15  | 0.30±0.15  | 0.475±0.15 | -          | - |
| 0.35±0.15           |           |           |           |            |            | 1.30±0.15  | 0.25±0.15 | 0.25±0.15  | 0.30±0.15  | 0.475±0.15 | -          | -          |   |
| 0.50±0.15           | 1.00±0.15 | 0.25±0.15 | 0.25±0.15 | 0.25±0.15  | 0.30±0.15  | 0.475±0.15 | -         | -          | -          |            |            |            |   |
|                     |           |           | 0.25±0.15 | 0.25±0.15  | 0.30±0.15  | 0.475±0.15 | -         | -          | -          |            |            |            |   |
|                     |           |           | 0.25±0.15 | 0.25±0.15  | 0.30±0.15  | 0.475±0.15 | -         | -          | -          |            |            |            |   |
| C                   | 2.00±.15  | 1.20±0.20 | 0.55±0.10 | 0.40±0.20  | 0.40±0.20  | 0.40±0.20  | 0.20±0.10 | -          | -          | -          | -          |            |   |
|                     |           |           | 0.60±0.10 | 0.40±0.20  | 0.40±0.20  | 0.40±0.20  | 0.20±0.10 | -          | -          | -          | -          |            |   |
|                     |           |           | 0.80±0.10 | 0.40±0.20  | 0.40±0.20  | 0.40±0.20  | 0.20±0.10 | -          | -          | -          | -          |            |   |
| D                   | 1.60±0.15 | 0.80±0.15 | 0.60±0.10 | 0.55±0.10  | 0.25±0.10  | 0.23±0.10  | 0.40±0.10 | 0.12±0.10  | 0.125±0.10 | -          | -          | -          |   |
|                     | 2.00±.15  | 1.25±0.10 | 0.45±0.10 | 0.95±0.10  | 0.275±0.20 | 0.25±0.10  | 0.60±0.10 | 0.175±0.10 | 0.15±0.10  | -          | -          | -          |   |
|                     |           |           | 0.70 max  | 0.95±0.10  | 0.275±0.10 | 0.25±0.10  | 0.60±0.10 | 0.175±0.10 | 0.15±0.10  | -          | -          | -          |   |
| E                   | 1.10±0.10 | 0.90±0.10 | 0.60±0.10 | 0.25±0.10  | 0.18±0.10  | 0.205±0.10 | 0.25±0.10 | -          | -          | -          | -          |            |   |
|                     | 1.40±0.15 | 1.10±0.10 | 0.60±0.10 | 0.325±0.10 | 0.25±0.10  | 0.25±0.10  | 0.25±0.10 | -          | -          | -          | -          |            |   |
|                     | 1.40±0.15 | 1.10±0.15 | 0.70±0.10 | 0.325±0.10 | 0.25±0.10  | 0.25±0.10  | 0.25±0.10 | -          | -          | -          | -          |            |   |
|                     | 2.00±0.20 | 1.25±0.20 | 1.00 max. | 0.325±0.10 | 0.25±0.10  | 0.25±0.10  | 0.25±0.10 | -          | -          | -          | -          |            |   |
| F                   | 1.60±0.15 | 0.80±0.15 | 0.40±0.10 | 0.55±0.15  | 0.50±0.15  | 0.35±0.15  | 0.50±0.15 | 0.20±0.15  | -          | -          | -          | -          |   |
|                     |           |           | 0.60±0.10 | 0.55±0.15  | 0.50±0.15  | 0.35±0.15  | 0.50±0.15 | 0.20±0.15  | -          | -          | -          | -          |   |
| G                   | 1.60±0.10 | 0.80±0.10 | 0.70 max. | 0.55±0.10  | 0.25±0.10  | 0.23±0.10  | 0.40±0.10 | 0.12±0.10  | 0.195±0.10 | 0.21±0.10  | 0.125±0.10 | -          |   |
|                     | 2.00±0.15 | 1.25±0.10 | 0.80±0.10 | 0.95±0.10  | 0.40±0.10  | 0.30±0.10  | 0.30±0.10 | 0.15±0.10  | 0.30±0.10  | 0.35±0.10  | 0.15±0.10  | -          |   |
|                     |           |           | 0.90±0.10 | 0.95±0.10  | 0.40±0.10  | 0.30±0.10  | 0.30±0.10 | 0.15±0.10  | 0.30±0.10  | 0.35±0.10  | 0.15±0.10  | -          |   |
| 2.50±0.20           | 2.00±0.20 | 0.90±0.10 | 1.70±0.20 | 0.60±0.20  | 0.30±0.20  | 0.40±0.20  | 0.15±0.10 | 0.60±0.10  | 0.50±0.10  | 0.15±0.10  | -          |            |   |
| H                   | 1.60±0.15 | 0.80±0.10 | 0.60 max. | 0.25±0.10  | 0.23±0.05  | 0.40±0.10  | 0.30±0.10 | 0.55±0.10  | 0.60±0.10  | -          | -          | -          |   |
| I                   | 2.00±0.15 | 1.25±0.10 | 1.00 max. | 1.80±0.10  | 0.35±0.10  | 0.25±0.10  | 0.25±0.10 | 0.275±0.10 | 0.35±0.10  | 0.25±0.10  | 0.25±0.10  | 0.275±0.10 |   |
| J                   | 2.50±0.15 | 2.00±0.15 | 0.90±0.10 | 0.30±0.10  | 0.40±0.10  | 0.55±0.10  | 0.40±0.10 | 0.90±0.10  | 0.30±0.10  | -          | -          | -          |   |
| K                   | 2.00±0.15 | 1.25±0.15 | 1.05±0.15 | 0.475±0.15 | 0.30±0.15  | 0.20±0.15  | 0.50±0.15 | 0.60±0.15  | 0.95±0.15  | -          | -          | -          |   |
|                     | 3.20±0.20 | 2.50±0.20 | 1.80±0.20 | 0.95±0.20  | 0.60±0.20  | 0.30±0.15  | 0.70±0.15 | 1.20±0.15  | 2.00±0.15  | -          | -          | -          |   |
| L                   | 2.00±0.15 | 1.25±0.10 | 1.05 max. | 0.20±0.10  | 0.35±0.10  | 0.30±0.10  | 0.65±0.10 | 0.20±0.10  | 0.20±0.10  | 0.475±0.10 | 0.30±0.10  | -          |   |

■ ELECTRICAL SPECIFICATION

2.4GHz BAND WORKING FREQUENCY

| Part Number        | Frequency Range(GHz) | Insertion Loss (dB)                   | Attenuation (dB min. )   | VSWR (max.) | Impedance (Ω) | Size(mm)       | STRUCTURE |
|--------------------|----------------------|---------------------------------------|--|-------------|---------------|----------------|-----------|
| RBBPF1005040A1T    | 2.4~2.5              | 2.5                                   | 25(824~960MHz)<br>20(1710~1910MHz)<br>20(4800~5000MHz)<br>15(7200~7500MHz)   | 2.0         | 50            | 1.00x0.50x0.40 | B         |
| RFBPF1005040A3T    | 2.4~2.5              | 1.5max.(25°C)<br>1.7max.(-40~+85°C)   | 13(824~915MHz)<br>5(1545~1605MHz)<br>34(4800~5000MHz)<br>27(7200~7500MHz)  | 2.1         | 50            | 1.00x0.50x0.40 | B         |
| RFBPF1109060A0T    | 2.4~2.5              | 1.8                                   | 35(824~960MHz)<br>38(1545~1605MHz)<br>20(1710~1990MHz)<br>8(2110~2170MHz)<br>35(3600MHz)<br>35(4800~5000MHz)<br>35(7200~7500MHz)     | 2.0         | 50            | 1.10x0.90x0.60 | E         |
| RFBPF1411060A1T    | 2.4~2.5              | 1.8max.(25°C)<br>2.1max.(-40~+85°C)   | 40(824~960MHz)<br>40(1545~1605MHz)<br>20(1710~1990MHz)<br>8(2110~2170MHz)<br>35(3600MHz)<br>35(4800~5000MHz)<br>35(7200~7500MHz)     | 2.0         | 50            | 1.40x1.10x0.60 | E         |
| RFBPF1411060A2T    | 2.4~2.5              | 1.5                                   | 30(500~960MHz)<br>25(1500~1650MHz)<br>19(3200~3300MHz)<br>40(4800~5000MHz)<br>30(7200~7500MHz)                                       | 2.0         | 50            | 1.40x1.10x0.60 | E         |
| RBBPF1411060A3T    | 2.4~2.5              | 1.1                                   | 20( 50~960MHz)<br>10( 1710~1990MHz)<br>9( 3600MHz)<br>22( 4800~7200MHz)  | 2.0         | 50            | 1.40x1.10x0.60 | E         |
| RBBPF1411060A8T    | 2.4~2.5              | 1.0max.(25°C)<br>1.2max.(-40~+85°C)   | 15(50~960MHz)<br>10(1710~1990MHz)<br>15(3600MHz)<br>25(4800~7200MHz)   | 2.0         | 50            | 1.40x1.10x0.60 | E         |
| RFBPF1608060AA7M1U | 2.4~2.5              | 0.95max.(25°C)<br>1.25max.(-40~+85°C) | 20(500~960MHz)<br>23(3200MHz)<br>30(4800~5000MHz)<br>32(7200~7500MHz)  | 2.0         | 50            | 1.60x0.80x0.60 | H         |
| RFBPF1608060ADT    | 2.4~2.5              | 1.8max.(25°C)<br>2.1max.(-40~+85°C)   | 25(800~1000MHz)<br>22.5(1200~1300MHz)<br>5.5(2000MHz)<br>10.5(3000MHz)<br>23.5(3600~3800MHz)<br>35(4800~5000MHz)<br>35(7200~7500MHz) | 2.0         | 50            | 1.60x0.80x0.60 | B         |
| RFBPF1608060AET    | 2.4~2.5              | 1.7max.(25°C)<br>2.0max.(-40~+85°C)   | 25(880MHz)<br>20(3200MHz)<br>35(4800~5000MHz)<br>25(7200~7500MHz)  | 2.0         | 50            | 1.60x0.80x0.60 | F         |
| RFBPF1608070AFT    | 2.4~2.5              | 2.4max.(25°C)<br>2.7max.(-40~+85°C)   | 24.5(880~960MHz)<br>20(1710~1990MHz)<br>8.5(2170MHz)<br>15(4800~5000MHz)<br>20(7200~7500MHz)   | 2.0         | 50            | 1.60x0.80x0.70 | B         |
| RFBPF1608070AWT    | 2.4~2.5              | 2.0max.(25°C)<br>2.2max.(-40~+85°C)   | 30(960MHz)<br>25(1910MHz)<br>20(1990MHz)<br>25(4800MHz)<br>15(7200MHz)   | 2.0         | 50            | 1.60x0.80x0.70 | B         |
| RFBPF1608050A0T    | 2.4~2.5              | 2.0max.(25°C)<br>2.2max.(-40~+85°C)   | 20(960MHz)<br>20(1910MHz)<br>15(1990MHz)<br>18(4800MHz)<br>25(7200MHz)   | 2.0         | 50            | 1.60x0.80x0.50 | B         |
| RFBPF1608060A1T    | 2.4~2.5              | 2.8                                   | 25(695~800MHz)<br>20(1910MHz)<br>35(3200MHz)<br>20(4800~5000MHz)<br>20(7200~7500MHz)   | 2.0         | 50            | 1.60x0.80x0.60 | B         |
| RFBPF1608060A7T    | 2.4~2.5              | 3.0                                   | 25(695~800MHz)<br>20(1910MHz)<br>35(3200MHz)<br>20(4800~5000MHz)<br>20(7200~7500MHz)   | 2.0         | 50            | 1.60x0.80x0.60 | B         |

**2.4GHz BAND WORKING FREQUENCY**

| Part Number        | Frequency Range(GHz) | Insertion Loss (dB)                   | Attenuation (dB min.)   | VSWR (max.) | Impedance (Ω) | Size(mm)       | STRUCTURE |
|--------------------|----------------------|---------------------------------------|---|-------------|---------------|----------------|-----------|
| RFBPF1608070A3T    | 2.4~2.5              | 1.8max.(25°C)<br>2.1max.(-40~+85°C)   | 27(800~900MHz)<br>25(4800~5000MHz)<br>30(7200~7500MHz)  | 2.0         | 50            | 1.60x0.80x0.70 | B         |
| RFBPF2012080AM0T62 | 2.4~2.5              | 1.8max.(25°C)<br>2.0max.(-40~+85°C)   | 30(860~960MHz)<br>30(1545~1605MHz)<br>35(1710~1990MHz)<br>30(2170MHz)<br>30(4800~5000MHz)   | 2.0         | 50            | 2.00x1.20x0.80 | D         |
| RFBPF2008A38T      | 2.4~2.5              | 1.80max.(25°C)<br>2.00max.(-40~+85°C) | 30(860~960MHz)<br>30(1545~1605MHz)<br>35(1710~1990MHz)<br>30(2170MHz)<br>30(4800~5000MHz)   | 2.0         | 50            | 2.00x1.25x0.80 | G         |
| RFBPF2012090AS1T35 | 2.4~2.5              | 0.9max.(25°C)<br>1.1max.(-40~+85°C)   | 28(824~960MHz)<br>30(1570~1580MHz)<br>15(1710~1910MHz)<br>9.5(1910~1990MHz)<br>25(4800~5000MHz)<br>25(7200~7500MHz)   | 2.0         | 50            | 2.00x1.25x0.90 | G         |
| RFBPF2012060AAT    | 2.4~2.5              | 1.5max.(25°C)<br>1.8max.(-40~+85°C)   | 30(880~960MHz)<br>25(1710~1910MHz)<br>25(4800~5000MHz)<br>30(7200~7500MHz)  | 2.0         | 50            | 2.00x1.20x0.60 | C         |
| RFBPF2012040ABT    | 2.4~2.5              | 2.5                                   | 30(824~849MHz)<br>30(880~915MHz)<br>30(1545~1605MHz)<br>30(1565~1585MHz)<br>35(1710~1785MHz)<br>40(1850~1910MHz)<br>32(1920~1980MHz)<br>7(3168~4752MHz)<br>11(3300~3800MHz)<br>35(4800~4967MHz)<br>26(5150~6000MHz)<br>23(7200~7450MHz) | 2.0         | 50            | 2.00x1.20x0.40 | D         |
| RFBPF2012050ACT    | 2.4~2.5              | 2.5                                   | 35(824~960MHz)<br>38(1710~1910MHz)<br>25(4880~5000MHz)<br>20(7200~7500MHz)  | 2.0         | 50            | 2.00x1.20x0.55 | C         |
| RFBPF2012080ADT    | 2.4~2.5              | 1.5max.(25°C)<br>1.7max.(-40~+85°C)   | 30(860~960MHz)<br>30(1545~1605MHz)<br>30(1710~1990MHz)<br>30(2170MHz)<br>30(4800~5000MHz)   | 2.0         | 50            | 2.00x1.25x0.80 | D         |
| RFBPF2008A40T      | 2.4~2.5              | 1.8max.(25°C)<br>2.0max.(-40~+85°C)   | 30(824~915MHz)<br>30(1545~1605MHz)<br>35(1710~1990MHz)<br>30(2170MHz)<br>30(4800~4967MHz)<br>25(5150~6000MHz)<br>20(7200~7450.5MHz)   | 2.0         | 50            | 2.00x1.25x0.80 | D         |
| RFBPF2008A39T      | 2.4~2.5              | 1.8max.(25°C)<br>2.0max.(-40~+85°C)   | 35(824~960MHz)<br>28(1540~1605MHz)<br>30(1710~1990MHz)<br>30(2170MHz)<br>6(3200MHz)<br>30(4800~4967MHz)<br>20(5150~6000MHz)<br>18(7200~7450MHz)   | 2.0         | 50            | 2.00x1.25x0.80 | D         |
| RFBPF2012040AHT    | 2.4~2.5              | 2.5                                   | 25(746~764MHz)<br>30(824~849MHz)<br>26(869~960MHz)<br>28(1570~1580MHz)<br>28(1710~1785MHz)<br>30(1850~1910MHz)<br>30(1930~1990MHz)<br>30(2110~2170MHz)<br>15(3300~3800MHz)<br>35(4800~5000MHz)<br>20(7200~7450.5MHz)                    | 2.0         | 50            | 2.00x1.25x0.45 | D         |
| RBBPF2012050AHT    | 2.4~2.5              | 2.5max.(typ.2.2)                      | 25(746~764MHz)<br>30(824~849MHz)<br>26(869~960MHz)<br>28(1570~1580MHz)<br>28(1710~1785MHz)<br>30(1850~1910MHz)<br>30(1930~1990MHz)<br>25(2110~2170MHz)<br>15(3300~3800MHz)<br>35(4800~5000MHz)  | 2.0         | 50            | 2.00x1.25x0.45 | D         |

2.4GHz BAND WORKING FREQUENCY

| Part Number      | Frequency Range(GHz) | Insertion Loss (dB)                 | Attenuation (dB min. )   | VSWR (max.) | Impedance (Ω) | Size(mm)       | STRUCTURE |
|------------------|----------------------|-------------------------------------|--|-------------|---------------|----------------|-----------|
| RFBPF2012090ALT  | 2.4~2.5              | 1.0max.(25°C)<br>1.2max.(-40~+85°C) | 28(824~960MHz)<br>28(1570~1580MHz)<br>23(1710~1910MHz)<br>17(1920~1990MHz)<br>25(4800~5000MHz)   | 2.0         | 50            | 2.00x1.25x0.90 | G         |
| RFBPF2012090AMT  | 2.4~2.5              | 2.6                                 | 40(880~960MHz)<br>38(1710~1990MHz)<br>16(2170MHz)<br>30(4800~5000MHz)<br>30(7200~7500MHz)  | 2.0         | 50            | 2.00x1.20x0.90 | B         |
| RFBPF2012100ANT  | 2.4~2.5              | 2.3max.(25°C)<br>2.6max.(-40~+85°C) | 40(699~960MHz)<br>40(1428~1448MHz)<br>40(1476~1607MHz)<br>40(1710~1785MHz)<br>33(1805~1880MHz)<br>30(1880~1915MHz)<br>30(1920~1990MHz)<br>22(2110~2170MHz)<br>25(4800~5000MHz)<br>35(7200~7500MHz)                   | 2.0         | 50            | 2.00x1.20x1.00 | I         |
| RFBPF2012090AQT  | 2.4~2.5              | 1.2                                 | 20(1600MHz)<br>25(3200MHz)<br>20(4800~5000MHz)   | 2.0         | 50            | 2.00x1.20x0.90 | B         |
| RFBPF2012090ART  | 2.4~2.5              | 1.0                                 | 20(1600MHz)<br>25(3200MHz)   | 2.0         | 50            | 2.00x1.20x0.90 | B         |
| RFBPF2012100AVT  | 2.4~2.5              | 1.5max.(25°C)<br>1.7max.(-40~+85°C) | 40(699~960MHz)<br>40(1428~1448MHz)<br>40(1476~1607MHz)<br>40(1710~1785MHz)<br>33(1805~1880MHz)<br>30(1880~1915MHz)<br>30(1920~1990MHz)<br>25(4800~5000MHz)<br>30(7200~7500MHz)                                       | 2.0         | 50            | 2.00x1.20x1.00 | I         |
| RBBPF2010A108Q1C | 2.4~2.5              | 1.3max.(25°C)<br>1.5max.(-40~+85°C) | 38(50~960MHz)<br>17(1710~1910MHz)<br>5(3200MHz)<br>30(4800~5000MHz)<br>25(7200~7500MHz)  | 2.0         | 50            | 2.00x1.20x0.90 | E         |
| RFBPF2009A12T    | 2.4~2.5              | 1.0max.(25°C)<br>1.2max.(-40~+85°C) | 28(824~960MHz)<br>28(1570~1580MHz)<br>23(1710~1910MHz)<br>17(1920~1990MHz)<br>4(2100~2170MHz)<br>25(4800~5000MHz)<br>25(7200~7500MHz)  | 2.0         | 50            | 2.00x1.25x0.90 | G         |
| RBBPF2010A16T    | 2.4~2.5              | 1.3max.(25°C)<br>1.5max.(-40~+85°C) | 38(50~960MHz)<br>17(1710~1990MHz)<br>20(3200MHz)<br>30(4800~5000MHz)<br>25(7200~7500MHz)   | 2.0         | 50            | 2.00x1.25x1.00 | E         |
| RFBPF2009A25T    | 2.4~2.5              | 1.7max.(25°C)<br>1.9max.(-40~+85°C) | 30(900MHz)<br>20(1850MHz)<br>30(4800MHz)   | 2.0         | 50            | 2.00x1.20x0.90 | B         |
| RFBPF2009A26T    | 2.4~2.5              | 1.4max.(25°C)<br>1.6max.(-40~+85°C) | 30(824~960MHz)<br>30(1710~1910MHz)<br>20(1920~1990MHz)<br>6(2110~2170MHz)<br>20(4800~5000MHz)  | 2.0         | 50            | 2.00x1.20x0.90 | B         |
| RFBPF2012040A3T  | 2.4~2.5              | 2.0max.(25°C)<br>2.2max.(-40~+85°C) | 25(746~764MHz)<br>30(824~849MHz)<br>26(869~960MHz)<br>28(1570~1580MHz)<br>28(1710~1785MHz)<br>30(1850~1910MHz)<br>30(1930~1990MHz)<br>25(2110~2170MHz)<br>15(3300~3800MHz)<br>35(4800~5000MHz)<br>20(7200~7450.5MHz) | 2.0         | 50            | 2.00x1.25x0.45 | D         |

2.4GHz BAND WORKING FREQUENCY

| Part Number     | Frequency Range(GHz) | Insertion Loss (dB)                 | Attenuation (dB min. )  | VSWR (max.) | Impedance (Ω) | Size(mm)       | STRUCTURE |
|-----------------|----------------------|-------------------------------------|---|-------------|---------------|----------------|-----------|
| RFBPF2012080A6T | 2.4~2.5              | 3.5                                 | 30(880~960MHz)<br>30(1710~1990MHz)<br>20(2110~2170MHz)<br>30(4800~5000MHz)<br>30(7200~7500MHz)  | 2.0         | 50            | 2.00x1.20x0.80 | C         |
| RFBPF2012100A6T | 2.4~2.5              | 1.0max.(25°C)<br>1.2max.(-40~+85°C) | 21(902~928MHz)<br>26(4800~5000MHz)<br>34(7200~7500MHz)<br>29(9600~10000MHz)   | 2.0         | 50            | 2.00x1.20x1.00 | L         |
| RFBPF2012080A7T | 2.4~2.5              | 2.8<br>(typ.2.5)                    | 40(DC~1600MHz)<br>35(1710MHz)<br>25(1900MHz)<br>12(2100MHz)<br>8(2170MHz)<br>30(3100MHz)<br>40(4800~5000MHz)<br>20(7200~7500MHz)  | 2.0         | 50            | 2.00x1.20x0.80 | B         |
| RFBPF2012060A9T | 2.4~2.5              | 2.8                                 | 30(960MHz)<br>30(1600MHz)<br>20(1990MHz)<br>35(3200MHz)<br>40(4800MHz)<br>25(7200MHz)   | 2.0         | 50            | 2.00x1.20x0.60 | B         |
| RFBPF2520090ACT | 2.4~2.5              | 2.1max.(25°C)<br>2.3max.(-40~+85°C) | 43(806~960MHz)<br>43(1570~1580MHz)<br>43(1710~1990MHz)<br>20(2110~2170MHz)<br>30(4800~5000MHz)<br>25(7200~7500MHz)  | 2.0         | 50            | 2.50x2.00x0.90 | G         |
| RFBPF2520070AMT | 2.4~2.5              | 2.0max.(25°C)<br>2.2max.(-40~+85°C) | 45(824~960MHz)<br>45(1570~1580MHz)<br>45(1710~1785MHz)<br>40(1805~1850MHz)<br>35(1850~1910MHz)<br>35(1920~1990MHz)<br>25(2110~2170MHz)<br>5(2750~3000MHz)<br>15(3000~4800MHz)<br>30(4800~5000MHz)<br>30(5150~5850MHz)<br>20(7200~7500MHz) | 2.0         | 50            | 2.50x2.00x0.70 | A         |
| RFBPF2520080AUT | 2.4~2.5              | 2.2                                 | 30(900MHz)<br>30(1850MHz)<br>33(2170MHz)<br>35(4800MHz)<br>25(7200MHz)  | 2.0         | 50            | 2.50x2.00x0.70 | A         |
| RFBPF2520120A1T | 2.4~2.5              | 1.7                                 | 30(900MHz)<br>30(1850MHz)<br>20(2100MHz)<br>40(4800MHz)<br>25(7200MHz)  | 2.0         | 50            | 2.50x2.00x1.20 | A         |
| RFBPF2520120A2T | 2.4~2.5              | 2.1                                 | 30(900MHz)<br>30(1850MHz)<br>30(4800MHz)  | 2.0         | 50            | 2.50x2.00x1.20 | A         |
| RFBPF2520120A3T | 2.4~2.5              | ≤1.2(25°C)                          | 30(900MHz)<br>30(1850MHz)<br>25(4800MHz)  | 2.0         | 50            | 2.50x2.00x1.20 | A         |
| RFBPF2520120A4T | 2.4~2.5              | ≤1.7(25°C)                          | 30(900MHz)<br>30(1850MHz)<br>25(4800MHz)  | 2.0         | 50            | 2.50x2.00x1.20 | A         |
| RFBPF2520100A6T | 2.4~2.5              | 1.4                                 | 35(1900/4800 MHz)   | 2.0         | 50            | 2.50x2.00x1.00 | A         |

**5GHz BAND WORKING FREQUENCY**

| Part Number        | Frequency Range(GHz) | Insertion Loss (dB)                          | Attenuation (dB min. )  | VSWR (max.) | Impedance (Ω) | Size(mm)       | STRUCTURE |
|--------------------|----------------------|--|---|-------------|---------------|----------------|-----------|
| RFBPF1608060K2T    | 4.9~5.84             | 1.5max.(25°C)<br>1.7max.(-40~+85°C)          | 33(100~2170MHz)<br>29(2170~2500MHz)<br>32(9800~12000MHz)  | 2.0         | 50            | 1.60x0.80x0.70 | B         |
| RFBPF1608060K68Q1C | 4.9~5.9              | 1.3max.(25°C)<br>1.5max.(-40~+85°C)          | 38(30~2700MHz)<br>16(3453~3547MHz)<br>33(3667~3883MHz)<br>9(6900~7093MHz)<br>32(7333~7750MHz)<br>40(10600~11650MHz)<br>18(15540~17760MHz)   | 2.0         | 50            | 1.60x0.80x0.60 | D         |
| RFBPF1608060K78Q1C | 5.15~5.95            | 0.8max.(25°C)<br>1.0max.(-40~+85°C)          | 40(30~2700MHz)<br>45(3400~3800MHz)<br>20(7250~7800MHz)<br>20(10300~11700MHz)  | 1.5         | 50            | 1.60x0.80x0.60 | D         |
| RFBPF1608060K88Q1C | 5.15~5.95            | 0.7max.(25°C)<br>0.85max.(-40~+85°C)         | 35(30~2700MHz)<br>30(3400~3800MHz)<br>12(7250~7800MHz)<br>20(10300~11700MHz)  | 1.5         | 50            | 1.60x0.80x0.60 | D         |
| RFBPF1608060KG8D1T | 5.15~5.95            | 0.8  | 40(30~2700MHz)<br>45(3400~3800MHz)<br>20(6900MHz)<br>20(7250~7800MHz)<br>20(10300~11700MHz)   | 1.67        | 50            | 1.60x0.80x0.60 | D         |
| RFBPF1606K12T      | 5.15~5.925           | 1.1max.(25°C)<br>1.3max.(-40~+85°C)          | 38(10~2700MHz)<br>20(2700~3550MHz)<br>15(3550~4000MHz)<br>3(4000~4500MHz)<br>5(4400MHz)<br>3(6500~7000MHz)<br>11(7000~7400MHz)<br>13(7400~9750MHz)<br>30(9750~10300MHz)<br>27(10300~12750MHz)<br>10(15540~17775MHz) | 2.0         | 50            | 1.60x0.80x0.60 | D         |
| RFBPF2012100KST    | 4.9~5.9              | 1.5(4.90GHz)<br>1.5(5.25GHz)<br>1.5(5.85GHz) | 30(3450MHz)<br>20(11000MHz)   | 2.0         | 50            | 2.00x1.20x1.00 | B         |
| RFBPF2012100K0T    | 4.9~5.9              | 1.7(4.90GHz)<br>1.5(5.25GHz)<br>1.5(5.85GHz) | 30(3450MHz)<br>20(11000MHz)   | 2.0         | 50            | 2.00x1.20x1.00 | B         |
| RFBPF2012090K5T    | 4.9~5.85             | 2.2max.(25°C)<br>2.5max.(-40~+85°C)          | 35(340~1195MHz)<br>19(2140~3580MHz)<br>25(6855~7150MHz)<br>20(8570~8930MHz)   | 2.0         | 50            | 2.00x1.20x0.90 | B         |
| RFBPF2012100K3T    | 4.9~5.85             | 1.8max.(25°C)<br>2.1max.(-40~+85°C)          | 30(500MHz)<br>35(3450MHz)<br>30(4000MHz)<br>20(4200MHz)<br>15(9800MHz)<br>15(11700MHz)  | 2.0         | 50            | 2.00x1.20x0.95 | B         |
| RFBPF2012100K6T    | 5.15~5.85            | 1.6max.(25°C)<br>1.8max.(-40~+85°C)          | 30(500MHz)<br>40(2000MHz)<br>35(3450MHz)<br>30(4000MHz)<br>20(4200MHz)  | 2.0         | 50            | 2.00x1.20x0.95 | B         |
| RFBPF2012090K9T    | 5.725~5.85           | 2.0  | 30(500MHz)<br>30(4000MHz)<br>20(4200MHz)<br>32(5000MHz)<br>15(9800MHz)<br>15(11750MHz)  | 2.0         | 50            | 2.00x1.20x0.95 | B         |
| RFBPF2520090K1T    | 4.9~5.85             | 1.2max.(25°C)<br>1.5max.(-40~+85°C)          | 50(824~1910MHz)<br>15(9880~11700MHz)  | 2.0         | 50            | 2.50x2.00x0.90 | A         |
| KFBPF25204G7W09S5K | 4.4~4.94             | 3.5  | 50(1000MHz)<br>35(2500MHz)<br>20(3500MHz)<br>7(4250MHz)<br>15(5150MHz)<br>20(57500MHz)  | 2.0         | 50            | 2.50x2.00x0.80 | A         |

**WIMAX BAND WORKING FREQUENCY**

| Part Number     | Frequency Range(GHz) | Insertion Loss (dB) | Attenuation (dB min. )   | VSWR (max.) | Impedance (Ω) | Size(mm)       | STRUCTURE |
|-----------------|----------------------|---------------------|--|-------------|---------------|----------------|-----------|
| RFBPF16082G3W0T | 2.3~2.39             | 2.0                 | 29(880~915MHz)<br>29(1710~1785MHz)<br>21(1850~1910MHz)<br>15(1920~1980MHz)<br>18(4600~4780MHz)<br>23(6900~7170MHz) | 2.0         | 50            | 1.60x0.80x0.70 | B         |

**1558 ~ 1606 MHz GNSS Band Applications**

| Part Number     | Frequency Range (MHz) | Insertion Loss (dB)                 | Attenuation (dB min. )   | VSWR (max.) | Impedance (Ω) | Size(mm)       | STRUCTURE |
|-----------------|-----------------------|-------------------------------------|--|-------------|---------------|----------------|-----------|
| RFBPF1109060E0T | 1550~1610             | 1.9max.                             | 25(960MHz)<br>8(1850MHz)<br>15(1990MHz)<br>20(2170MHz)<br>35(2400~2500MHz)<br>35(3400~3800MHz) | 2.0         | 50            | 1.10x0.90x0.60 | E         |
| RFBPF1411070E0T | 1558~1606             | 1.8max.(25°C)<br>2.0max.(-40~+85°C) | 30(824~849MHz)<br>30(880~915MHz)<br>10(1880~1910MHz)<br>22(1920~1980MHz)<br>30(2400MHz)        | 2.0         | 50            | 1.40x1.10x0.70 | E         |

**860~960MHz/1805~2025 MHz Band Application**

| Part Number        | Frequency Range (MHz) | Insertion Loss (dB)                  | Attenuation (dB min. )  | VSWR (max.) | Impedance (Ω) | Size(mm)       | STRUCTURE |
|--------------------|-----------------------|--------------------------------------|---|-------------|---------------|----------------|-----------|
| RFBPF2520090B08Q1C | 869~960               | 0.7max.(25°C)<br>0.75max.(-40~+85°C) | 25(430~490MHz)<br>10(1700~1900MHz)<br>20(2400~2500MHz)<br>20(4905~5845MHz)  | 1.9         | 50            | 2.50x2.00x0.90 | J         |
|                    | 1805~2025             | 1.1max.(25°C)<br>1.2max.(-40~+85°C)  | 25(900~1015MHz)<br>15(2400~2500MHz)<br>15(3610~3980MHz)<br>20(4905~5845MHz) | 2.0         |               |                |           |


**MoCA / Docsis Application**

| Part Number        | Frequency Range(MHz) | Insertion Loss (dB)                 | Attenuation (dB min. )   | VSWR (max.) | Impedance (Ω) | Size(mm)       | STRUCTURE |
|--------------------|----------------------|-------------------------------------|--|-------------|---------------|----------------|-----------|
| RFBPF3225180Y1T    | 975~1025             | 3.0                                 | 30(54~870MHz)<br>30(1125~1675MHz)<br>30(2300MHz)   | 2.0         | 75            | 3.20x2.50x1.80 | K         |
| RFBPF3225200Y07B1U | 475~675              | 2.5max.(25°C)<br>2.7max.(-40~+85°C) | 60(2.5MHz)<br>40(2.5~100MHz)<br>35(100~200MHz)<br>35(200~300MHz)<br>8(300~400MHz)<br>57(950MHz)<br>47(950~2025MHz)<br>41(2025~2500MHz)<br>35(2500~3000MHz) | 2.0         | 75            | 3.20x2.50x1.80 | K         |
| RBBPF3225180Y27B1U | 400~700              | 2.0                                 | 42(1~200MHz)<br>30(950~2150MHz)<br>35(2150~3000MHz)<br>27(3000~5900MHz)  | 2.0         | 50            | 3.20x2.50x1.80 | K         |
| KFBPF2012100C67B1U | 1125~1675            | 2.5                                 | 35(1~900MHz)<br>20(900~1002MHz)<br>35(2000~2500MHz)<br>20(2500~5900MHz)  | 2.0         | 50            | 2.00x1.25x1.05 | K         |
| RFBPF3225180C07B1U | 1125~1675            | 1.8max.(25°C)<br>2.0max.(-40~+85°C) | 30(5~864MHz)<br>34(864~1002MHz)<br>32(2300~3000MHz)  | 2.0         | 75            | 3.20x2.50x1.80 | K         |
| RBBPF3225180C67B1U | 1125~1675            | 2.0                                 | 40(1~900MHz)<br>25(900~1002MHz)<br>35(2000~2500MHz)<br>27(2500~5900MHz)  | 2.0         | 50            | 3.20x2.50x1.80 | K         |

LTE Band Application


| Part Number        | Frequency Range(MHz) | Insertion Loss (dB)                 | Attenuation (dB min.)  | VSWR (max.) | Impedance ( $\Omega$ ) | Size(mm)       | STRUCTURE |
|--------------------|----------------------|-------------------------------------|--|-------------|------------------------|----------------|-----------|
| RFBPF1109B101T     | 2110~2170            | 1.7                                 | 25(4280MHz)  | 2           | 50                     | 1.10x0.90x0.60 | E         |
| RFBPF1109B201T     | 1930~1990            | 1.7                                 | 25(3920MHz)  | 2           | 50                     | 1.10x0.90x0.60 | E         |
| RFBPF1109B301T     | 1805~1880            | 1.4                                 | 25(3685MHz)  | 2           | 50                     | 1.10x0.90x0.60 | E         |
| RFBPF1109B501T     | 869~894              | 0.9                                 | 12(1763MHz)  | 2           | 50                     | 1.10x0.90x0.60 | E         |
| RFBPF1109B701T     | 2620~2690            | 1.2                                 | 25(5310MHz)  | 2           | 50                     | 1.10x0.90x0.60 | E         |
| RFBPF1109B801T     | 925~960              | 0.9                                 | 12(1885MHz)  | 2           | 50                     | 1.10x0.90x0.60 | E         |
| RFBPF16081G9DM1T79 | 1805~2025            | 1.6max.(25°C)<br>1.8max.(-40~+85°C) | 25(700~950MHz)<br>15(950~1050MHz)<br>25(2400~2500MHz)<br>35(2700~5150MHz)<br>40(5150~5850MHz)<br>25(5850~12750MHz)                       | 2           | 50                     | 1.60x0.80x0.70 | G         |
| RFBPF16081G9DMAT79 | 1880~2025            | 2.0max.(25°C)<br>2.2max.(-40~+85°C) | 20(1545~1610MHz)<br>25(2400~2500MHz)<br>25(5150~5850MHz)   | 2           | 50                     | 1.60x0.80x0.70 | G         |
| RFBPF16081G9DS8T60 | 1805~2025            | 1.6                                 | 30(700~950MHz)<br>15(950~1050MHz)<br>25(2400~2500MHz)<br>35(2700~5400MHz)<br>35(5500~6200MHz)<br>35(9350~10150MHz)<br>20(10500~12750MHz) | 2           | 50                     | 1.60x0.80x0.70 | G         |

■ TYPICAL ELECTRICAL CHARACTERISTICS

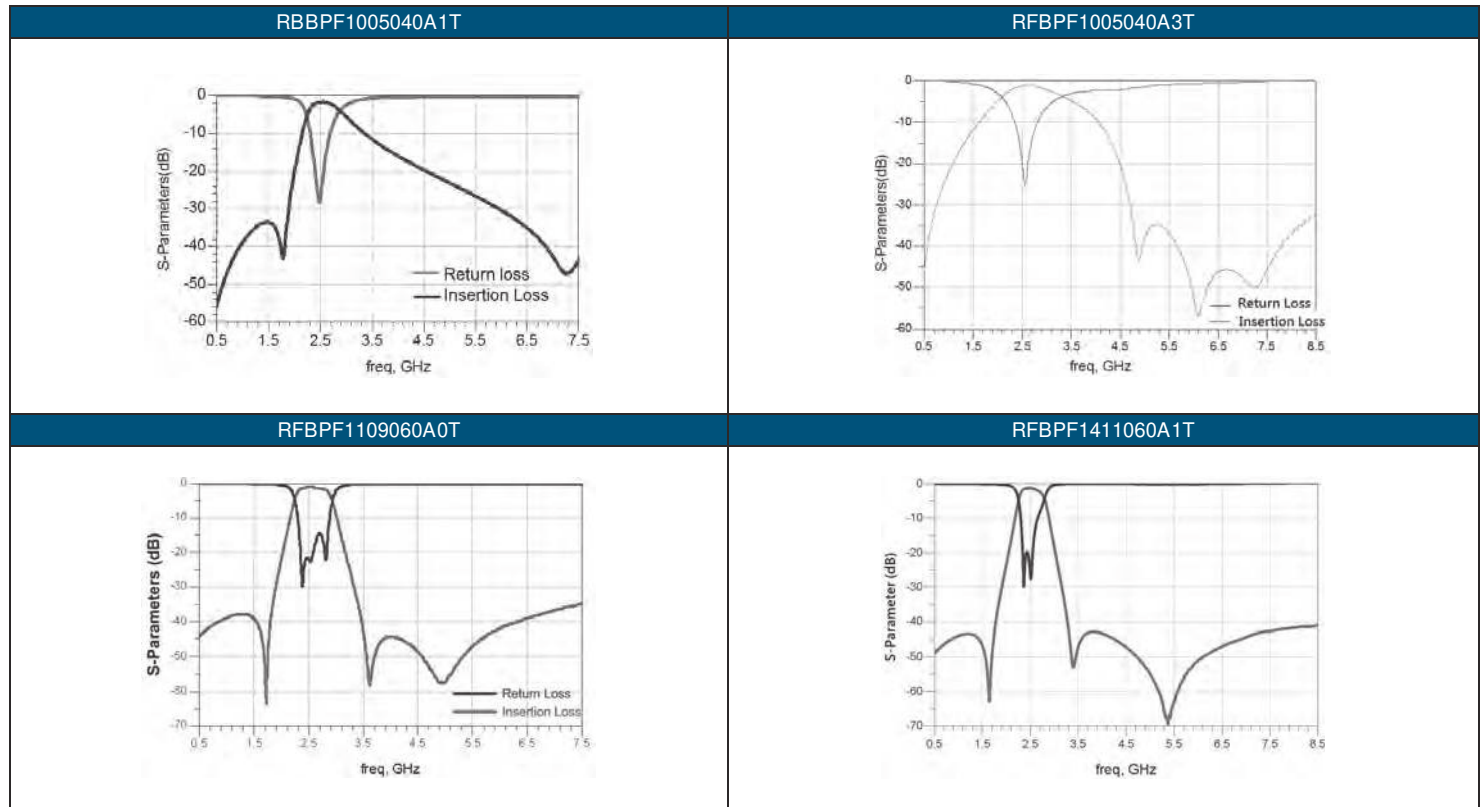





TYPICAL ELECTRICAL CHARACTERISTICS

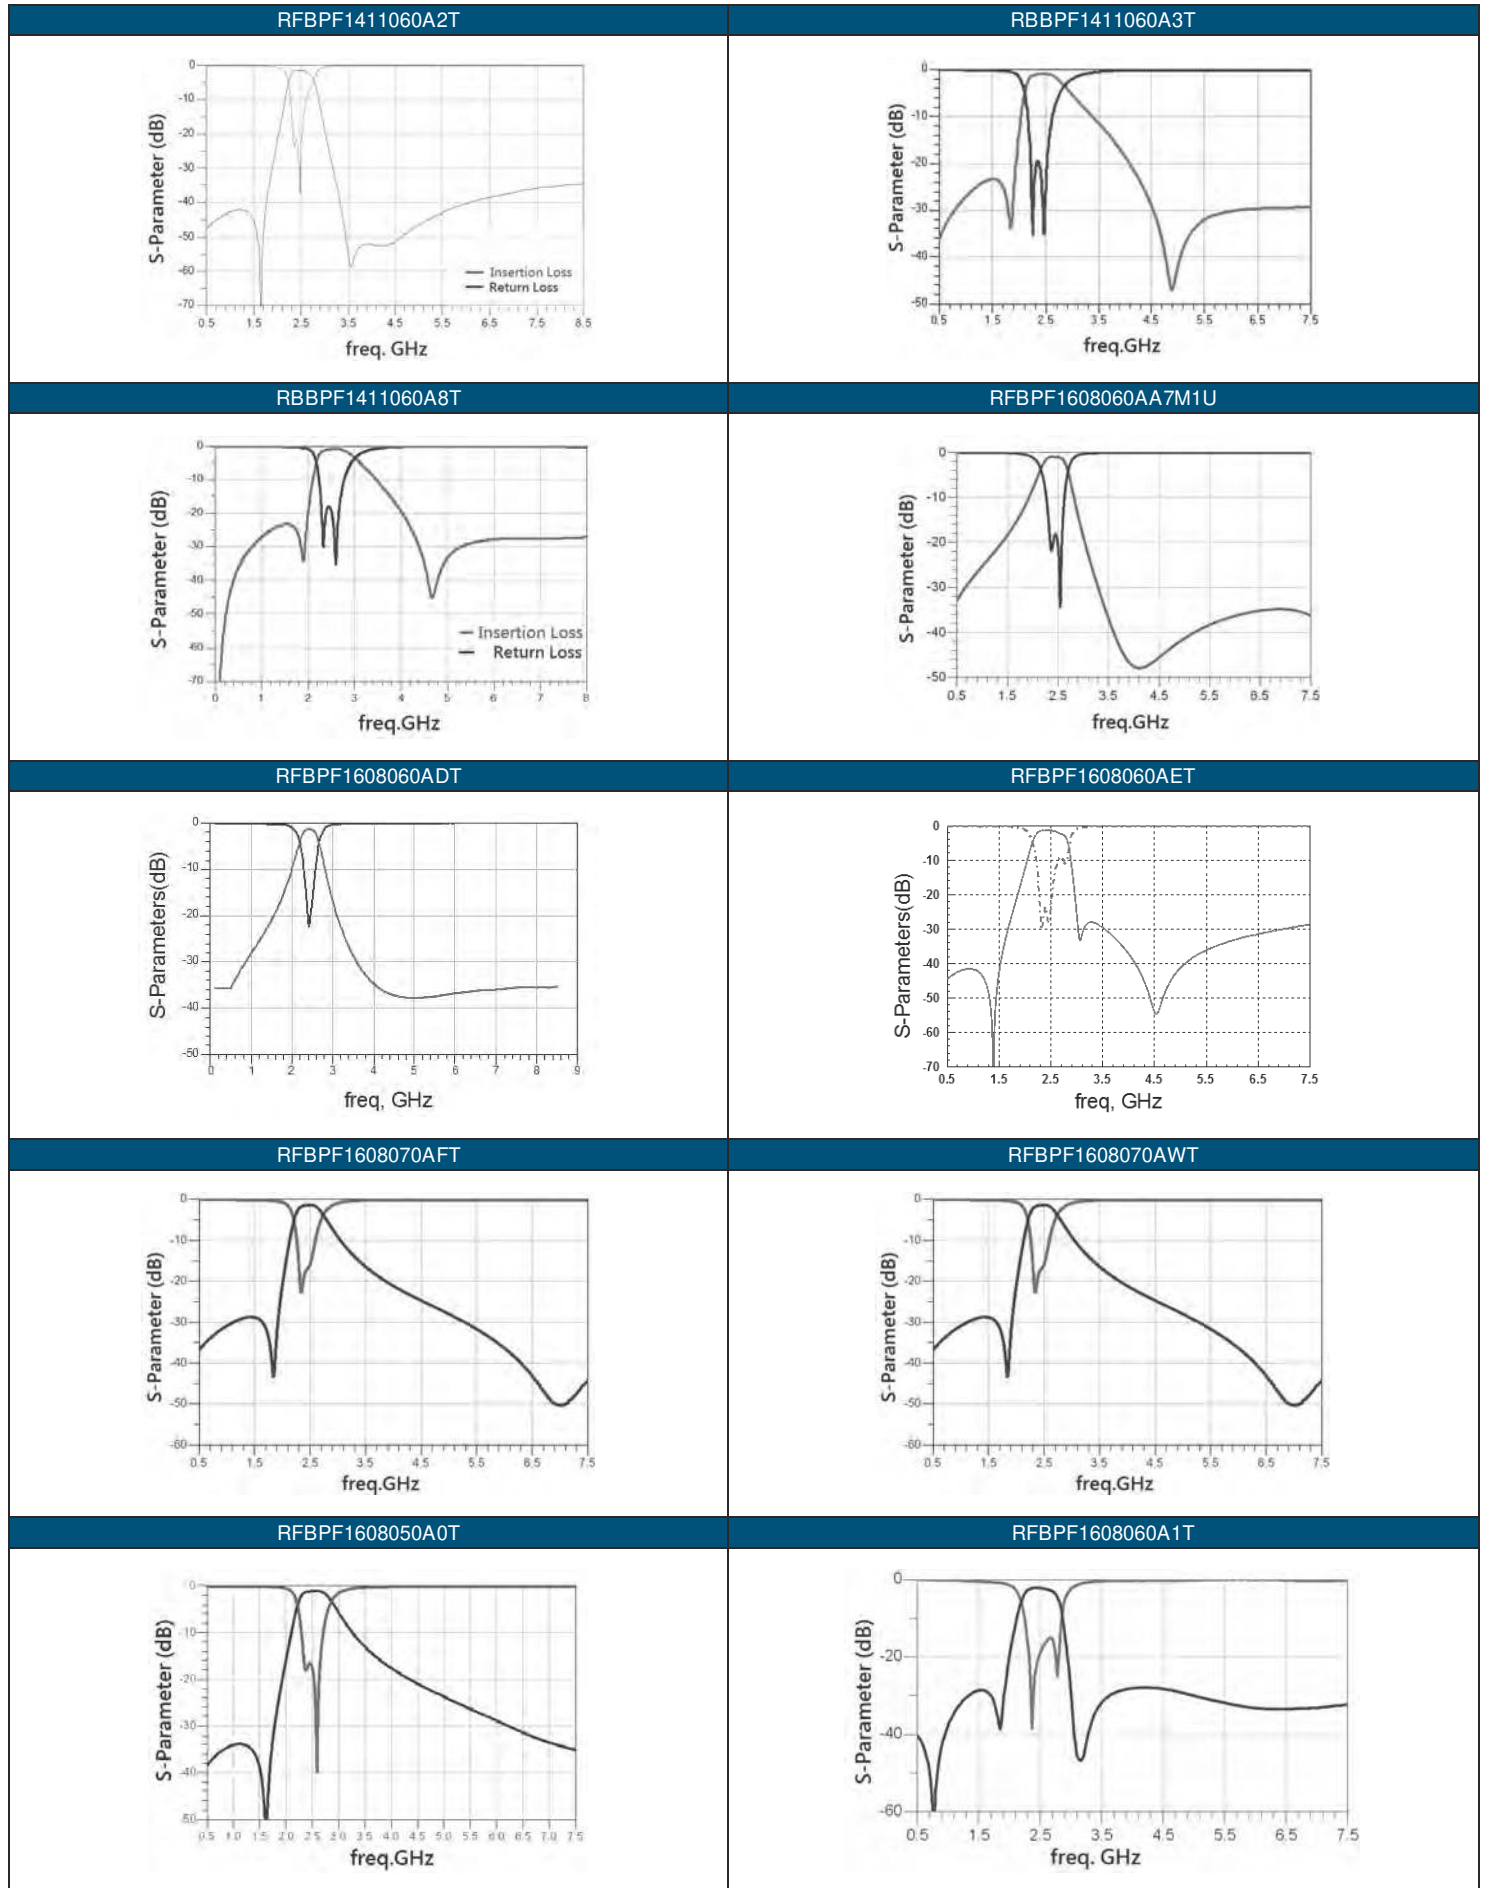

TYPICAL ELECTRICAL CHARACTERISTICS

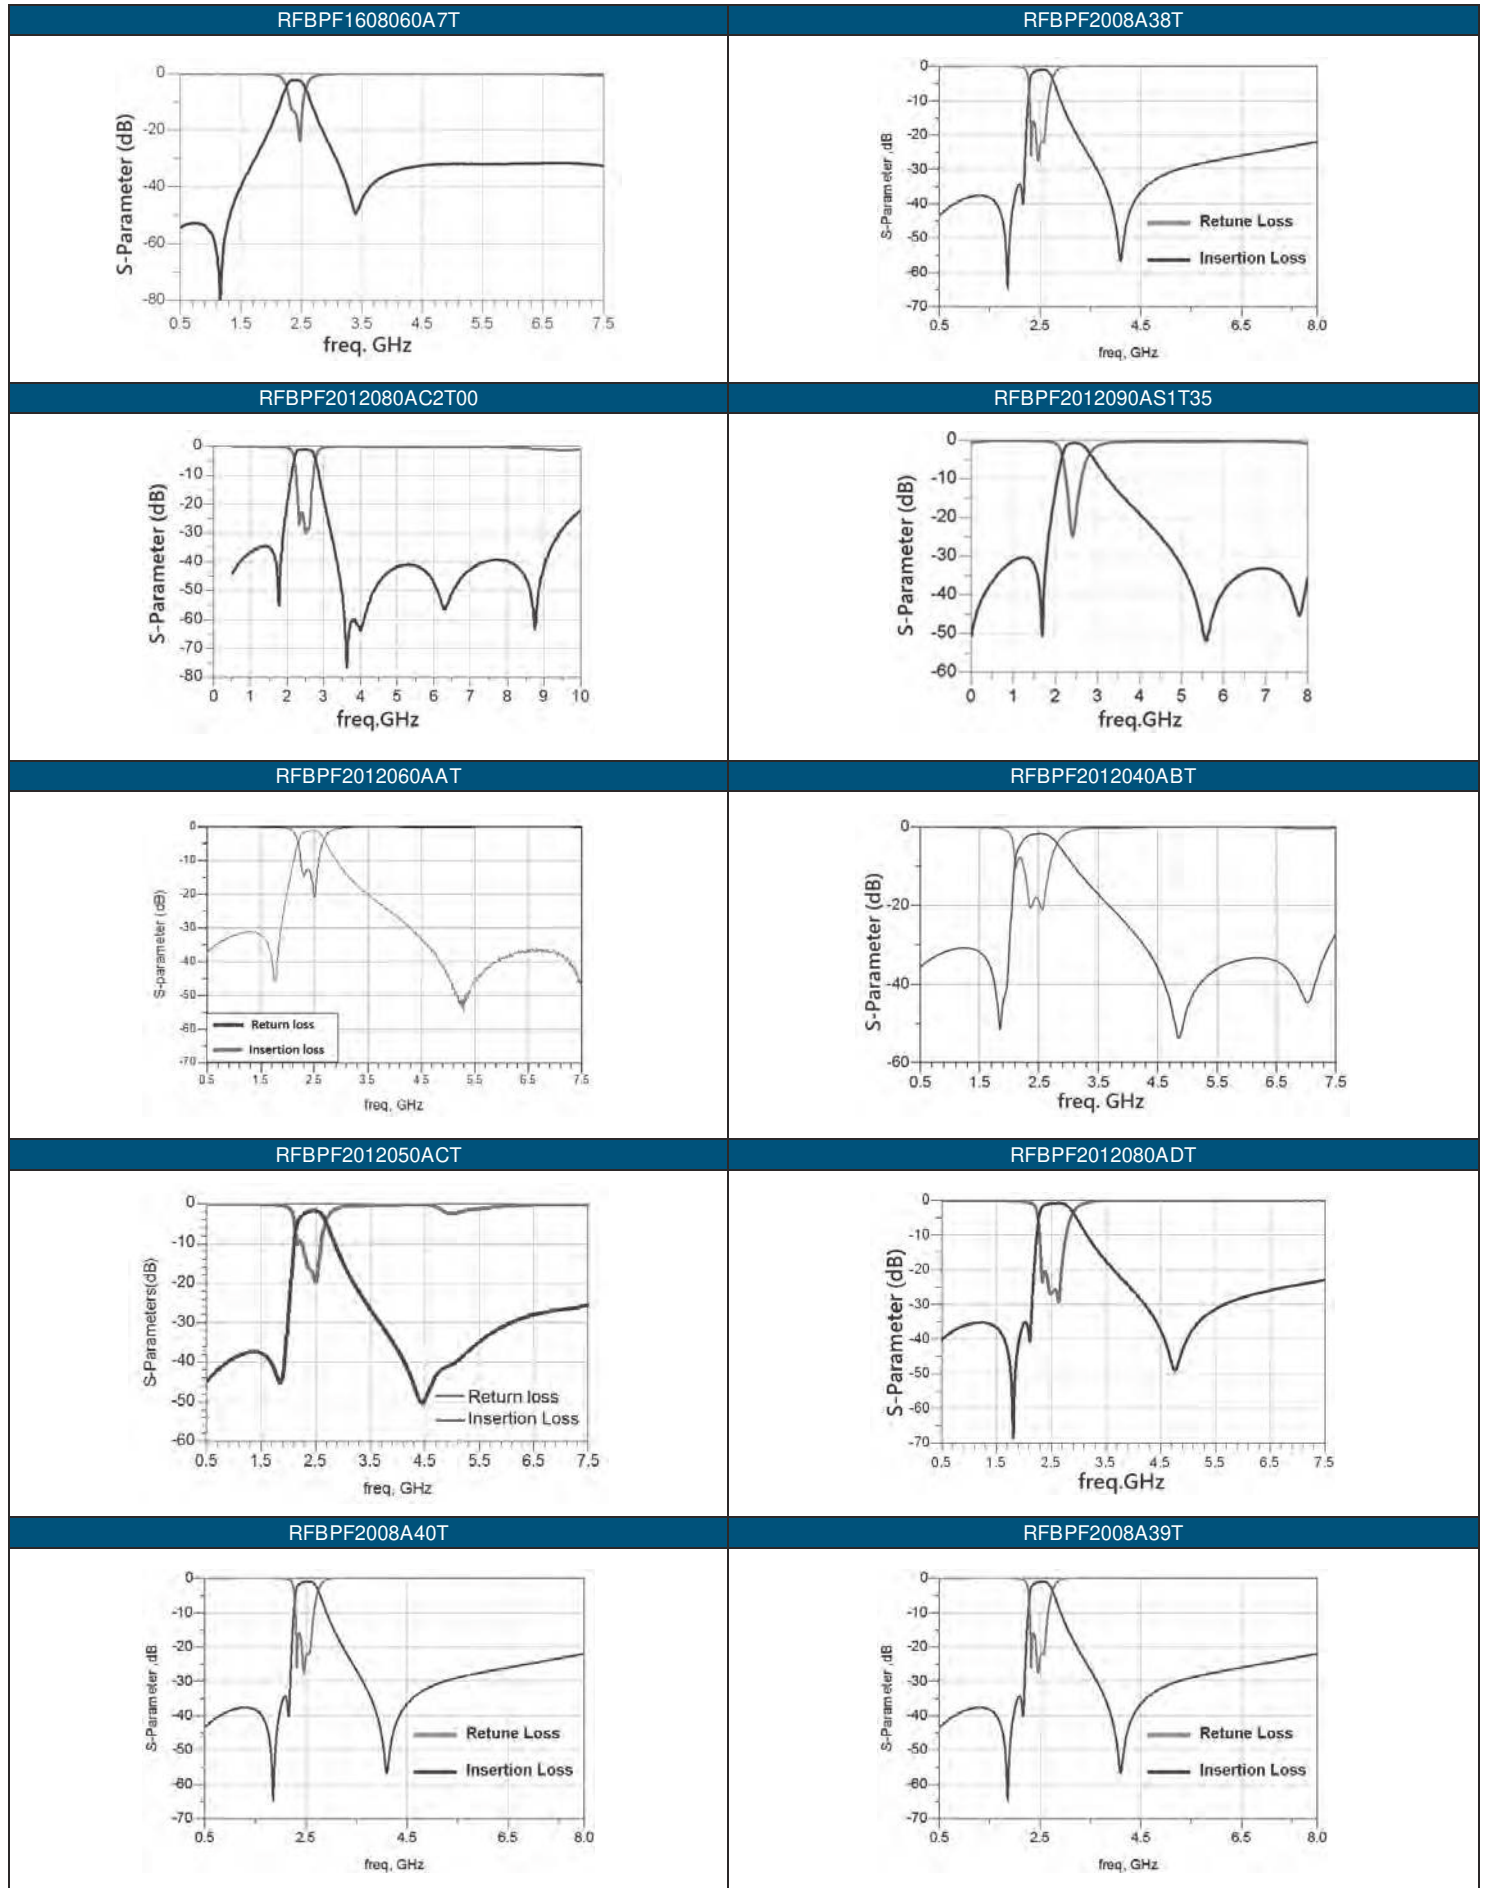


TYPICAL ELECTRICAL CHARACTERISTICS

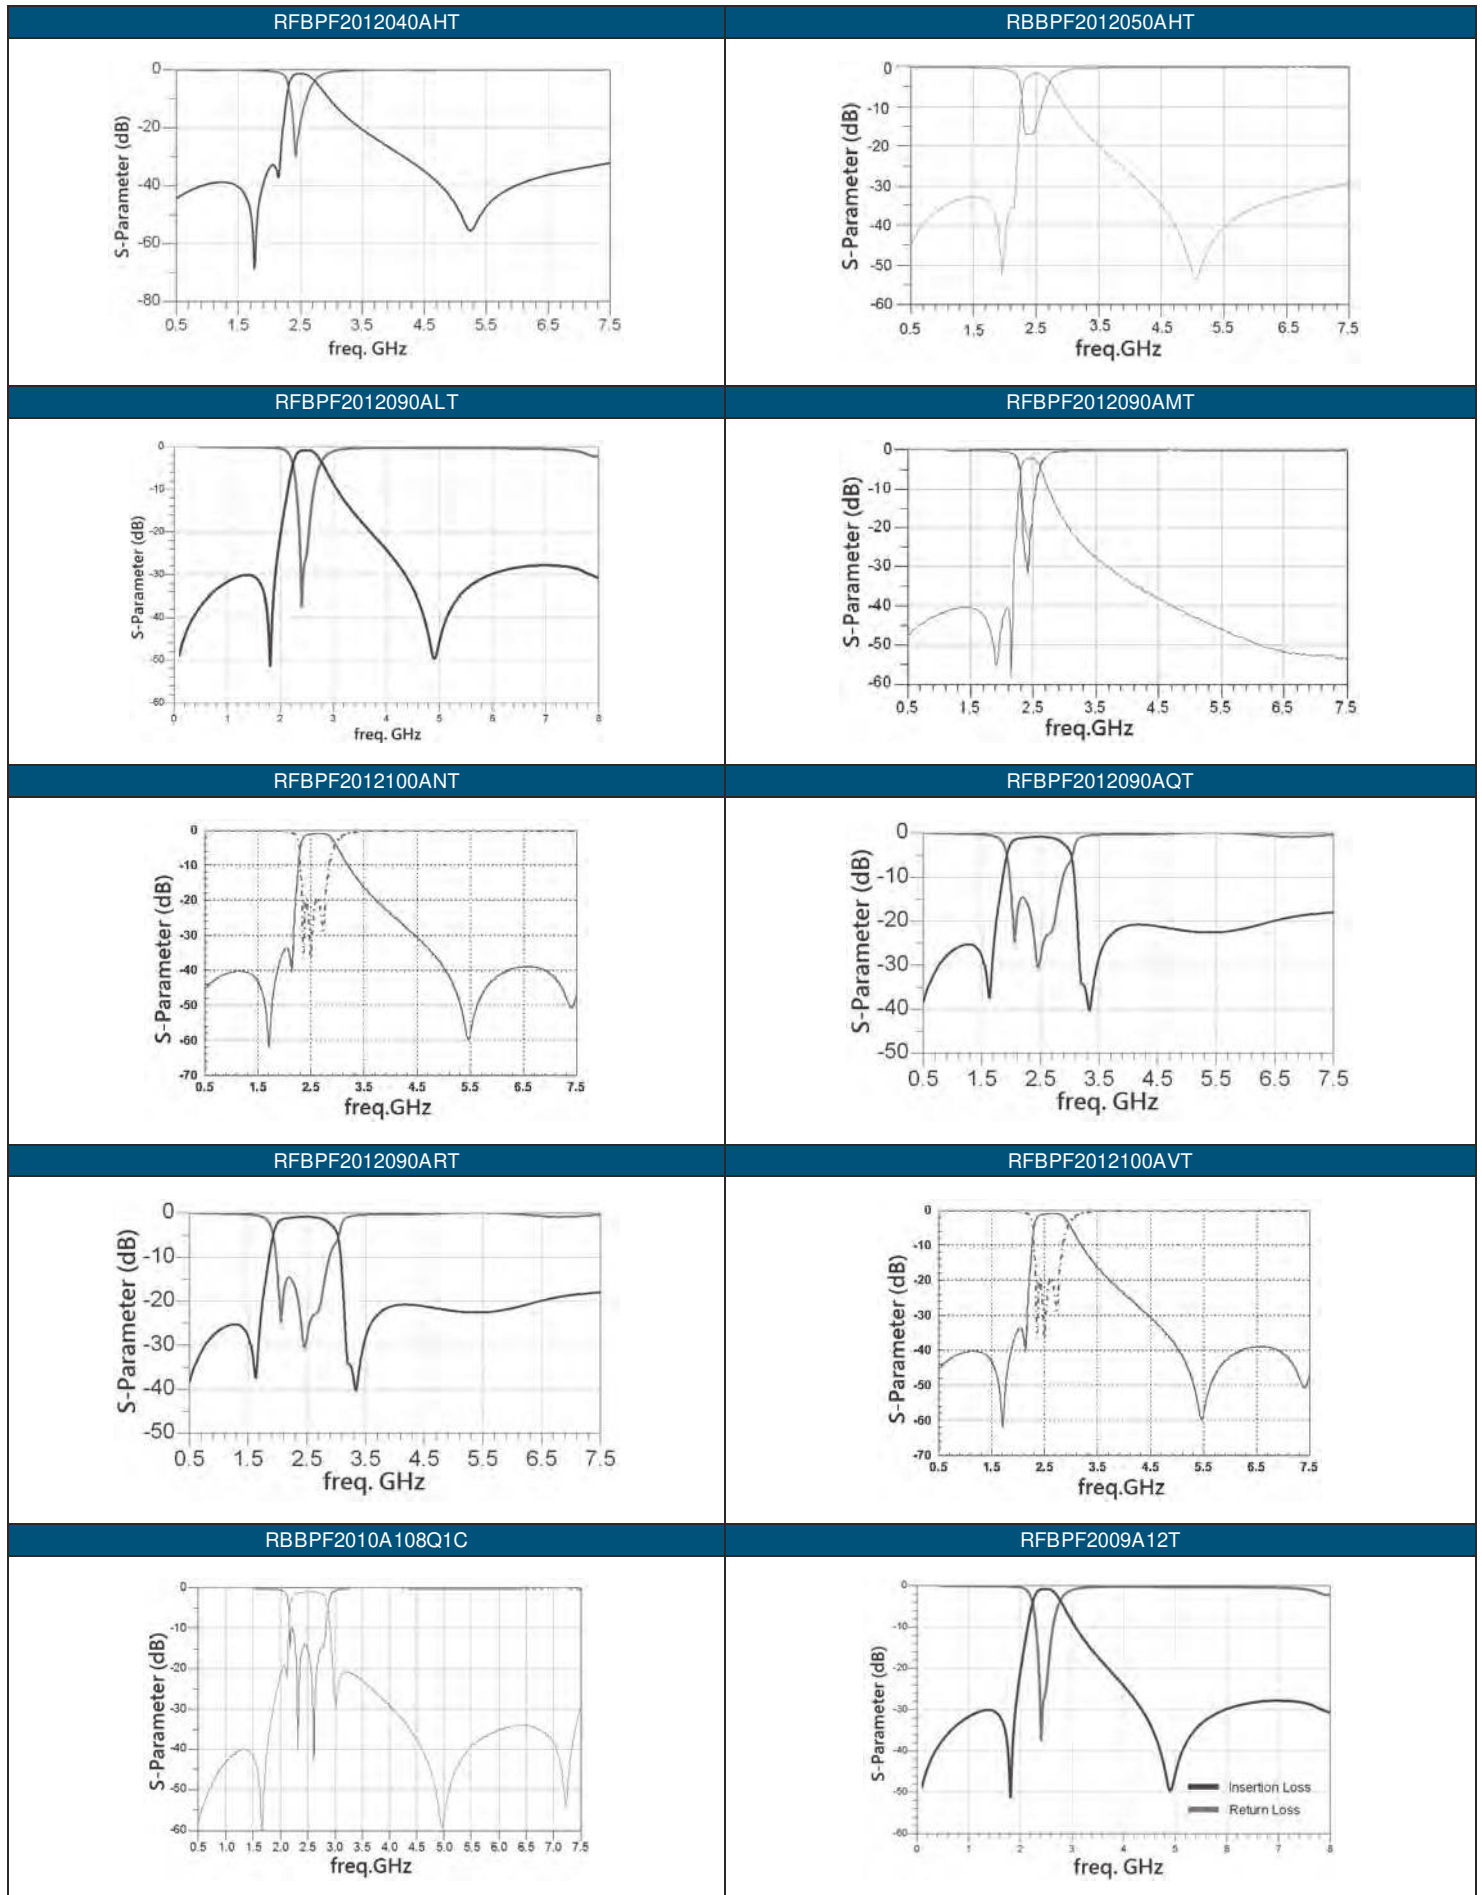


TYPICAL ELECTRICAL CHARACTERISTICS


RBBPF2010A16T

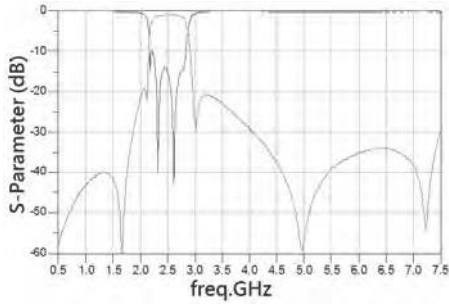


RFBPF2009A25T

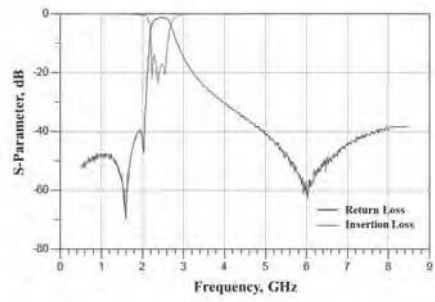


RFBPF2009A26T

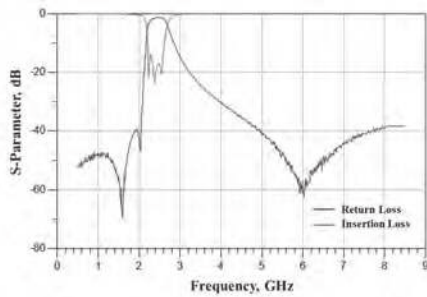


RFBPF2012040A3T

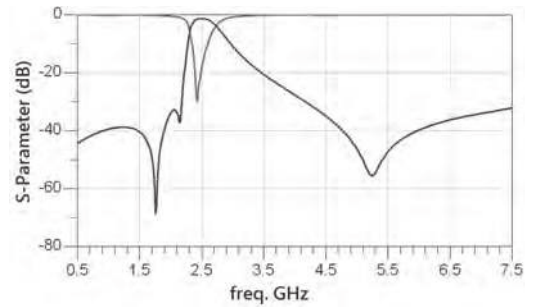


RFBPF2012080A6T

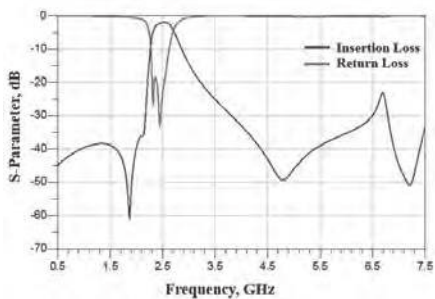


RFBPF2012100A6T

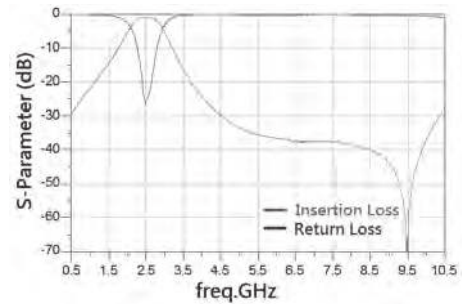


RFBPF2012080A7T

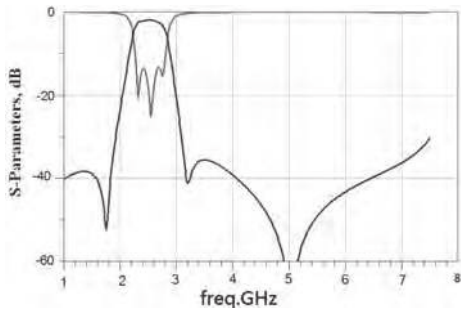


RFBPF2520090ACT

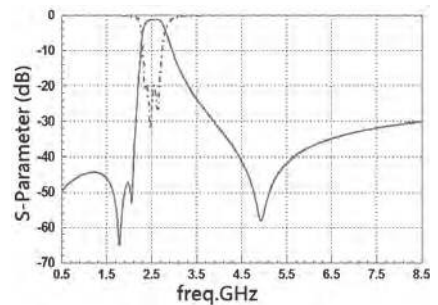


RFBPF2520070AMT

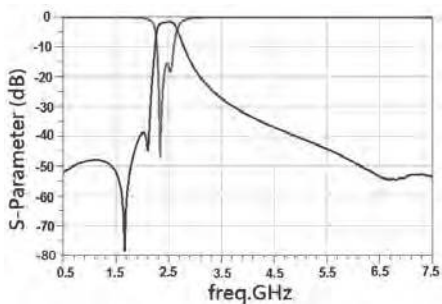


RFBPF2520080AUT

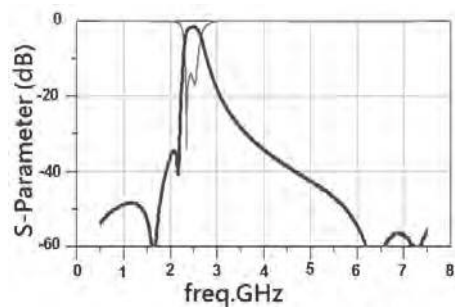


TYPICAL ELECTRICAL CHARACTERISTICS

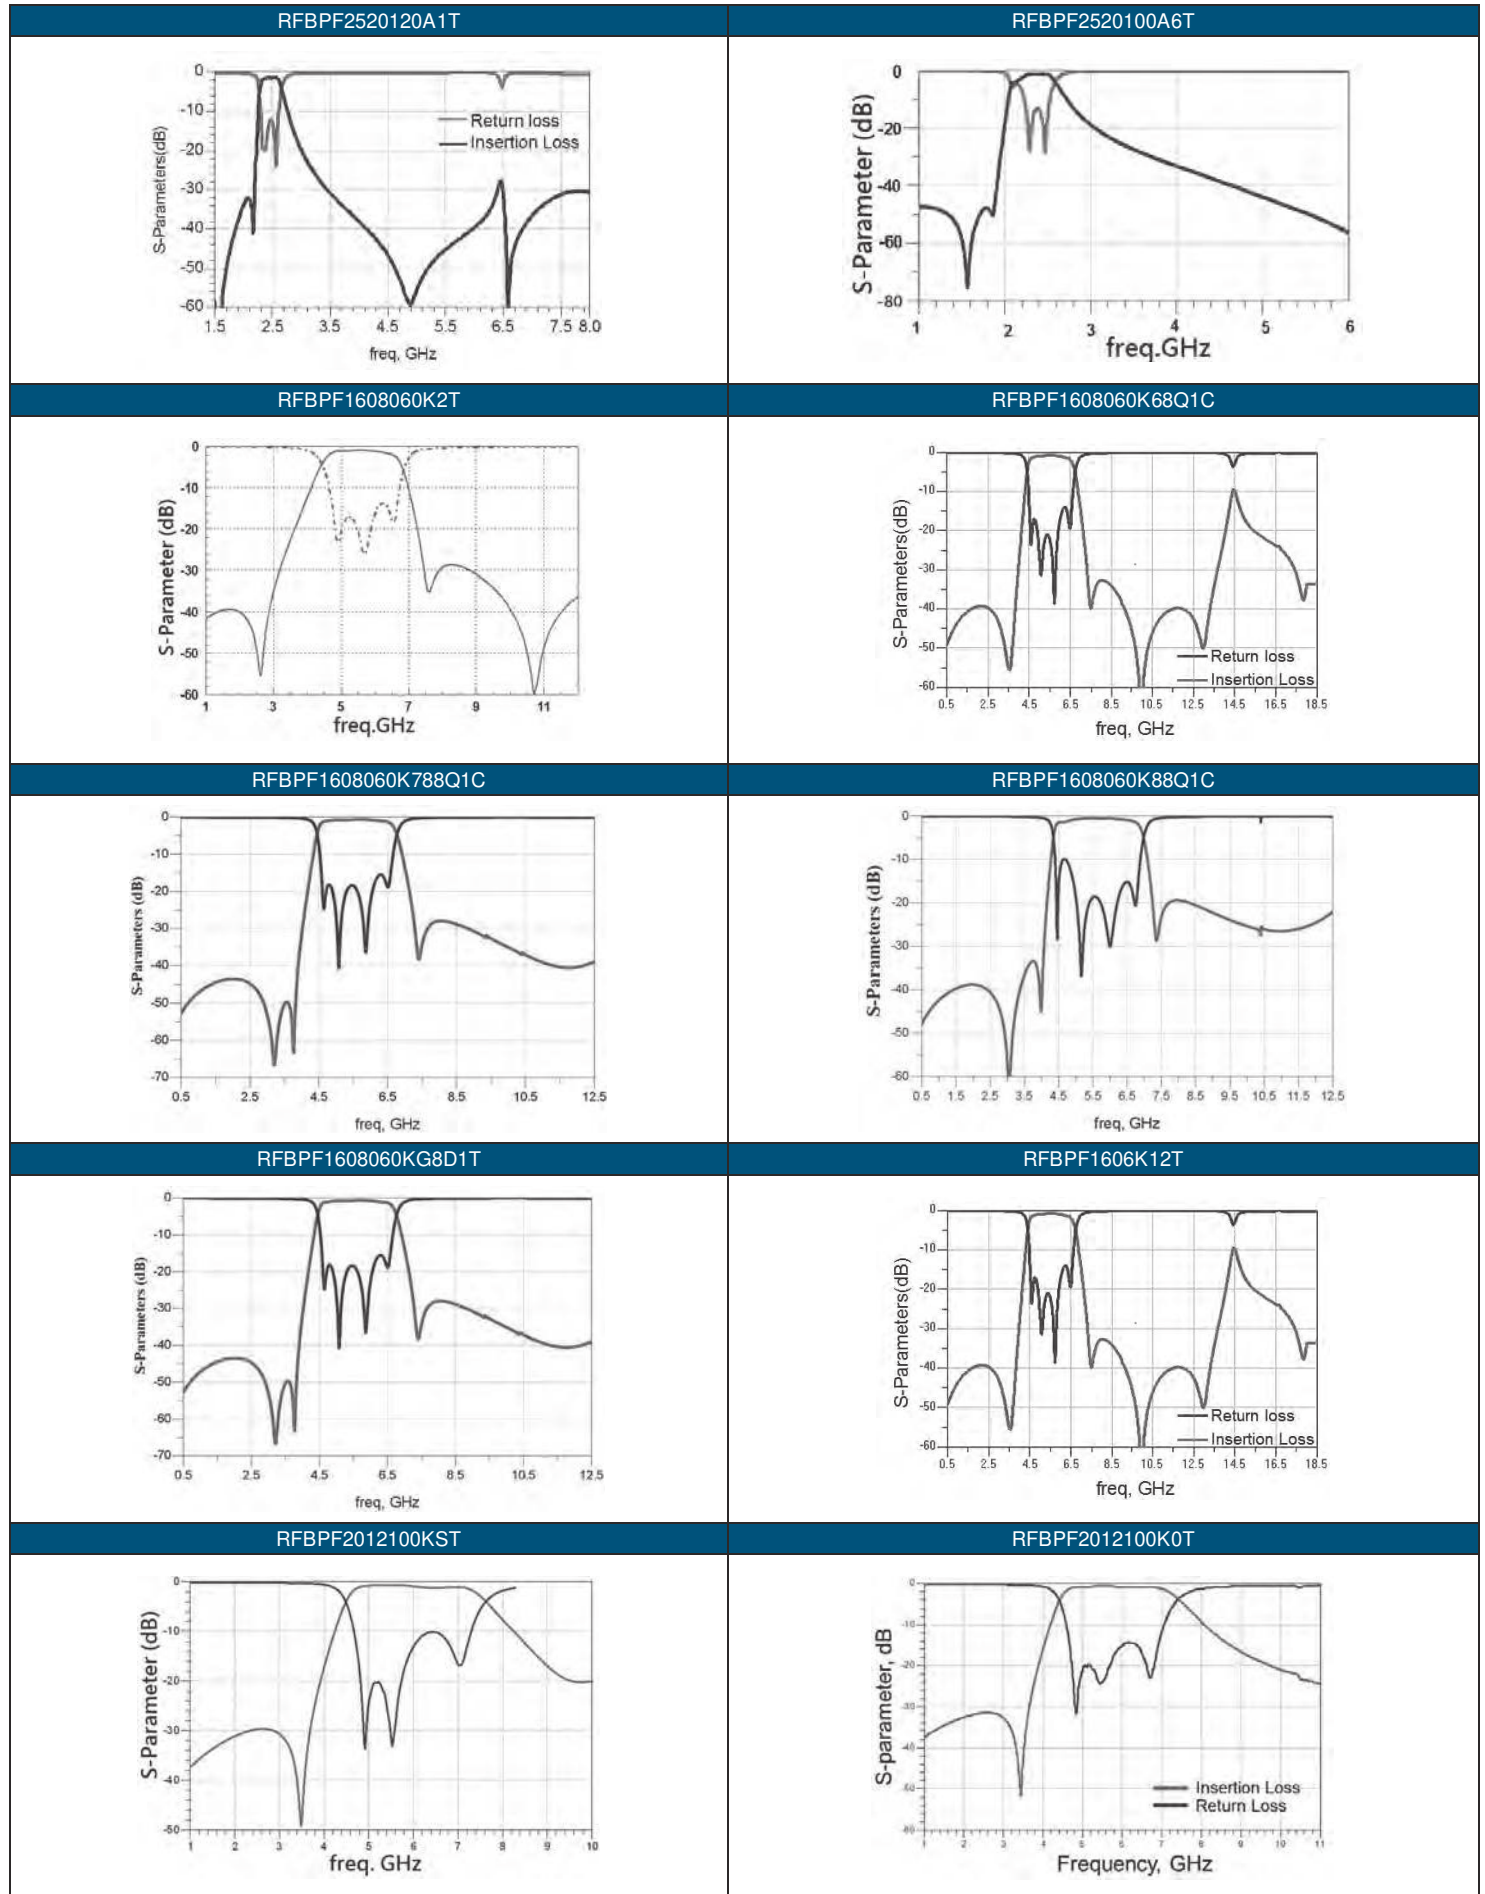


TYPICAL ELECTRICAL CHARACTERISTICS

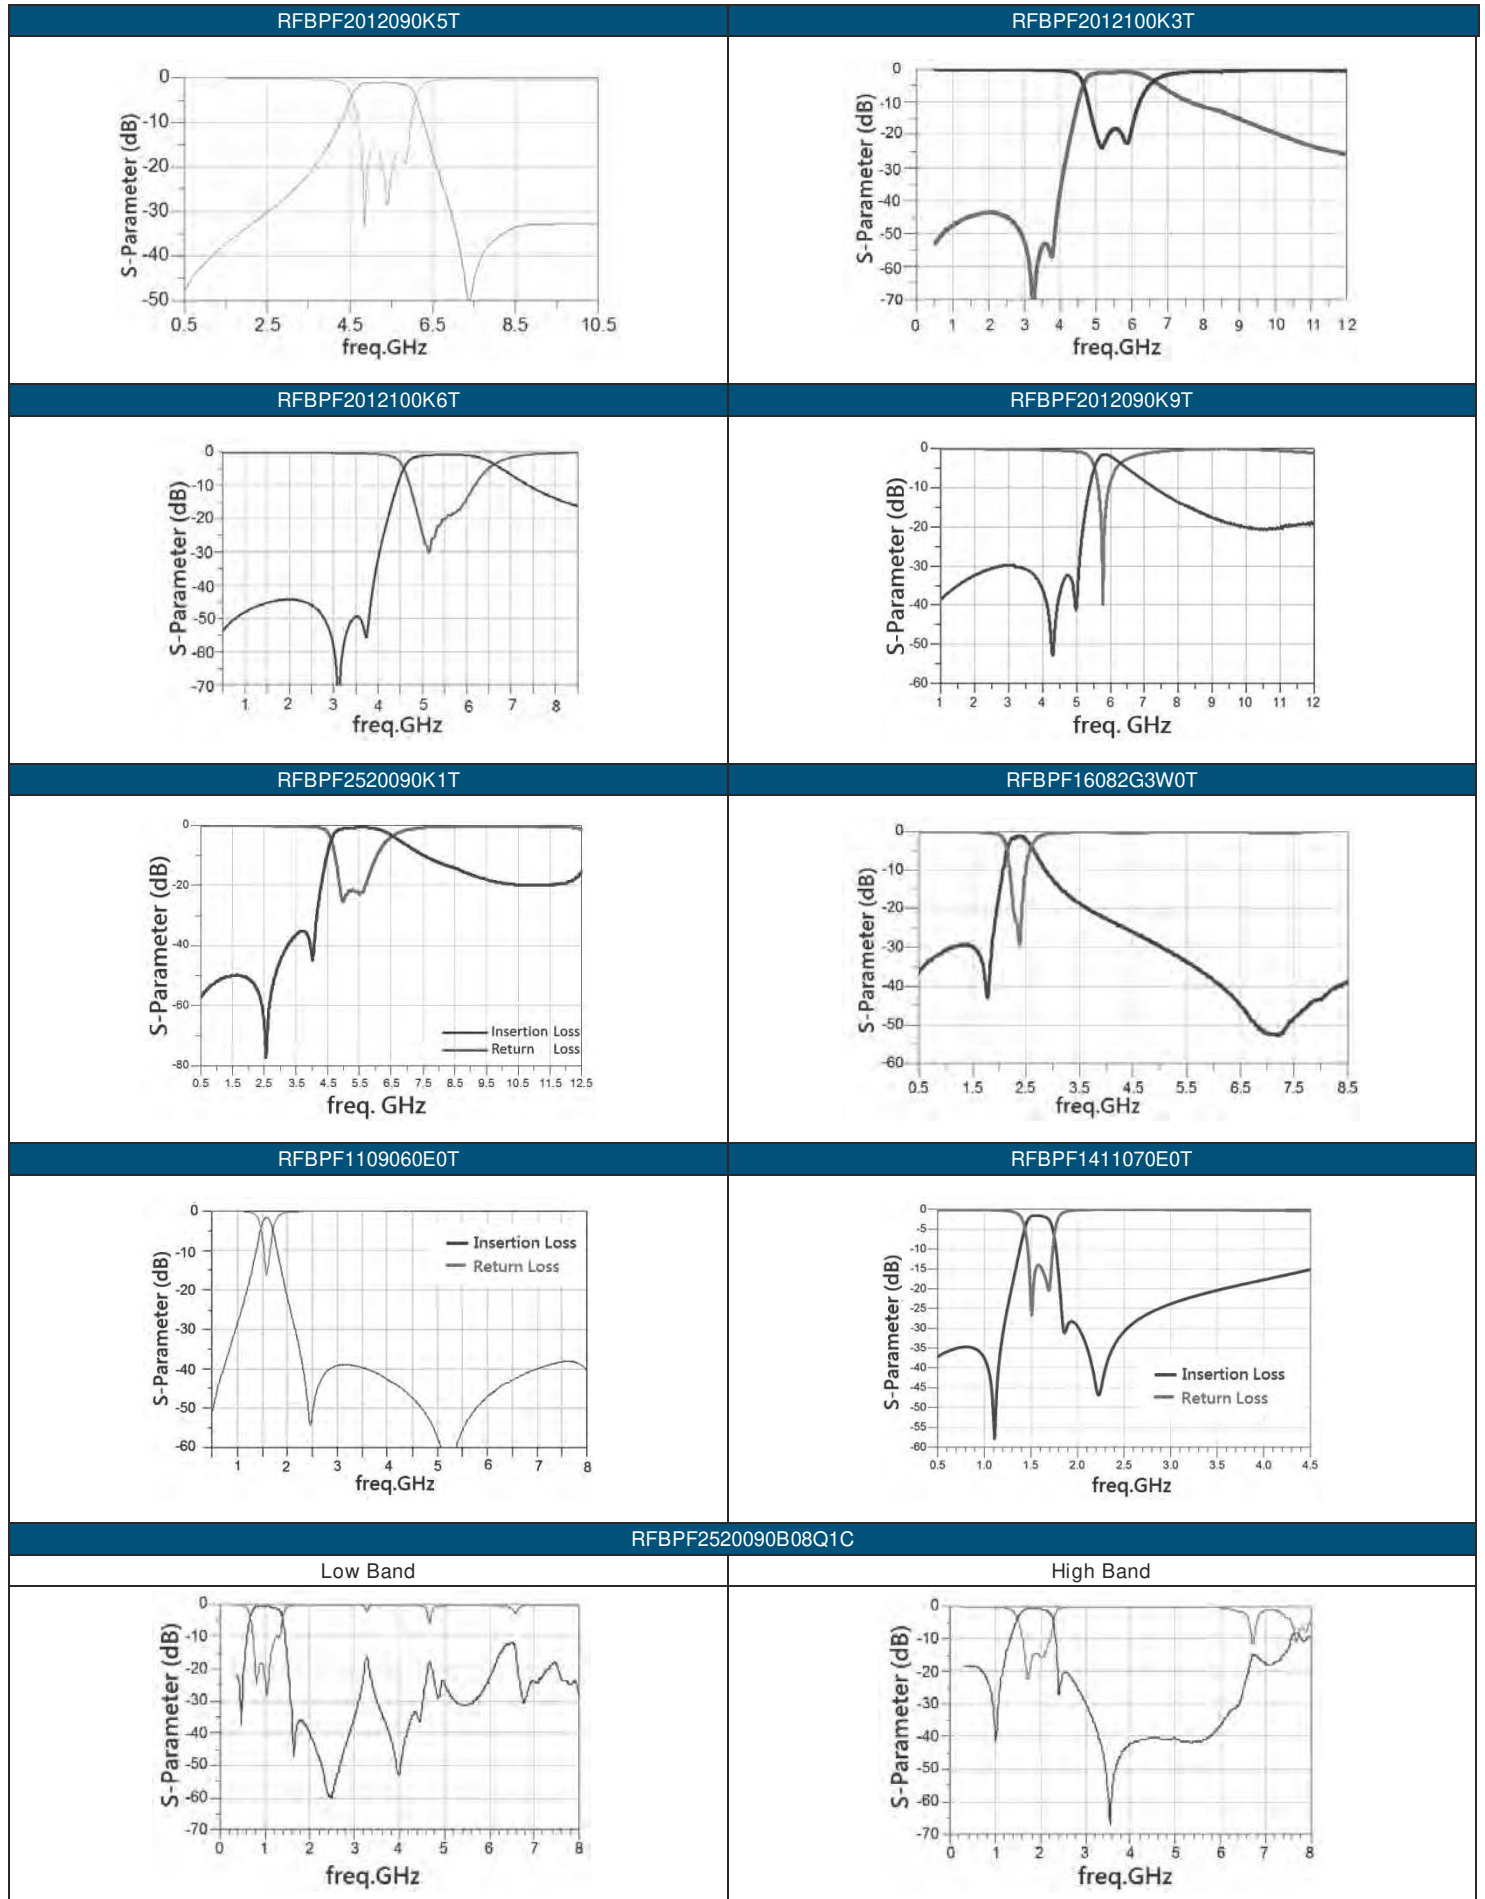

TYPICAL ELECTRICAL CHARACTERISTICS

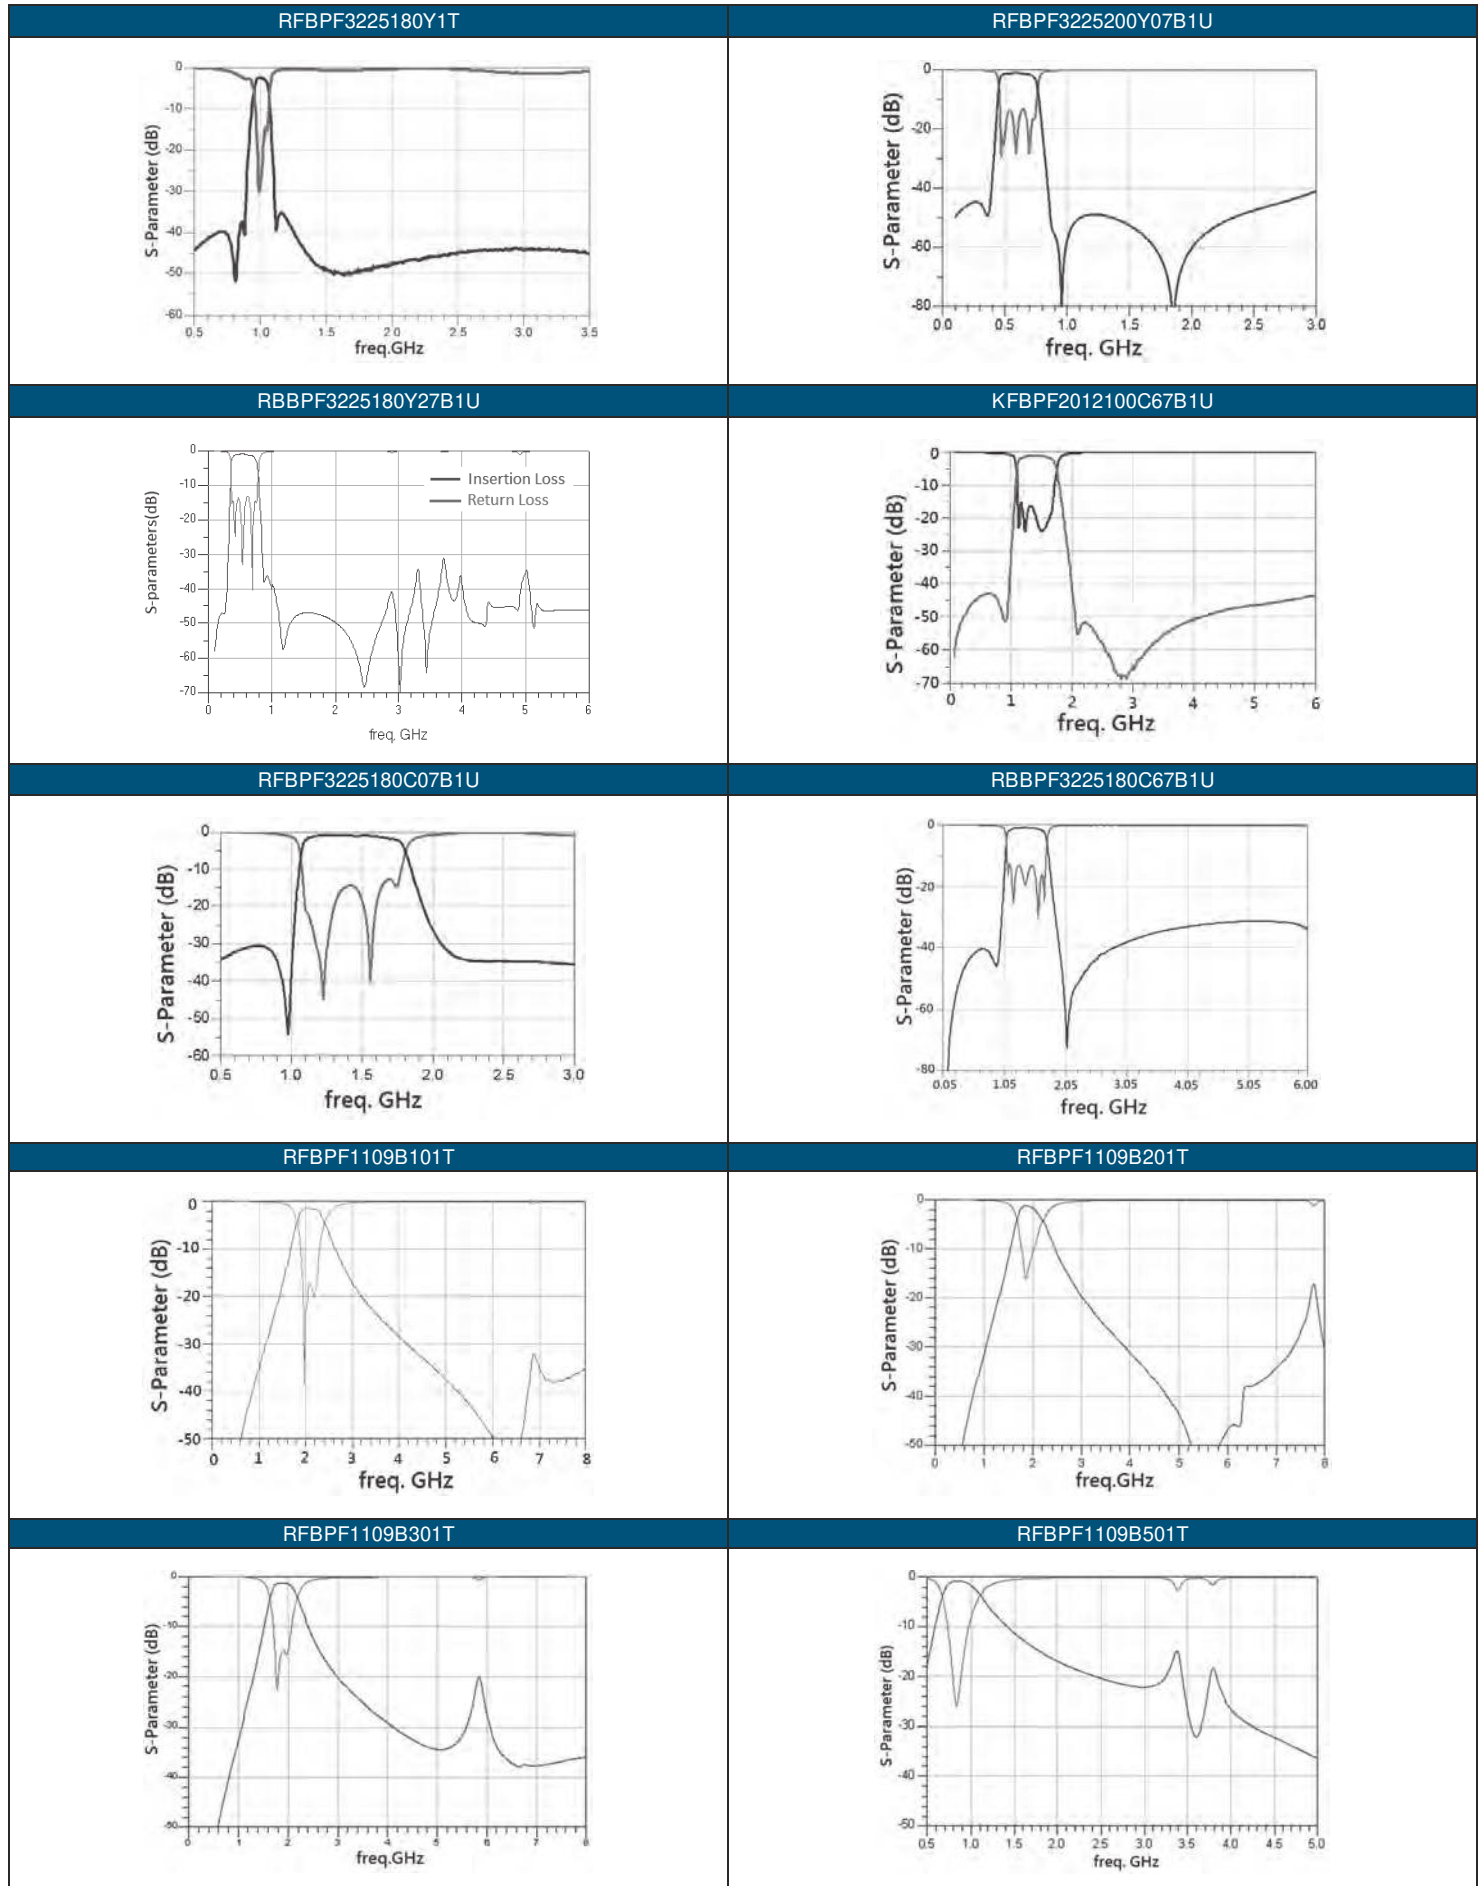

TYPICAL ELECTRICAL CHARACTERISTICS

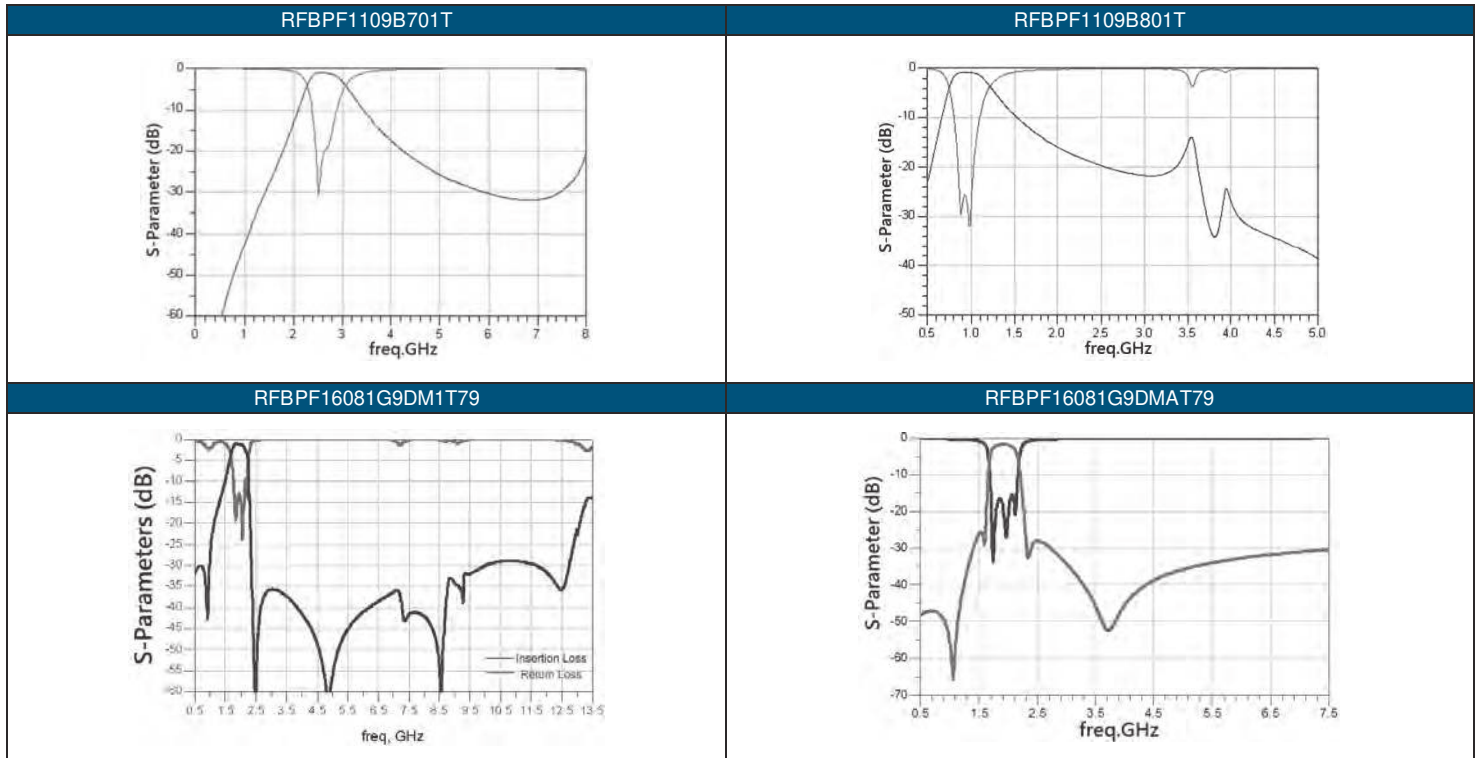

- For more information, please contact with local sales representative
- All specifications are subject to change without notice



HIGH FREQUENCY MULTILAYER BALANCED FILTER

■ STRUCTURE AND PIN ASSOCIATED

**STRUCTURE A**

**STRUCTURE A-1**

**STRUCTURE A-2**

**STRUCTURE B**

■ STRUCTURE AND DIMENSION

Unit: mm

| Structure\ Dimension | L         | W         | T         | A          | B          | C         | D         | E             | F             | G         |           |
|----------------------|-----------|-----------|-----------|------------|------------|-----------|-----------|---------------|---------------|-----------|-----------|
| A                    | 1.60±0.15 | 0.80±0.15 | 0.60±0.10 | 0.175±0.15 | 0.25±0.15  | 0.25±0.15 | 0.50±0.15 | 0.20±0.15     | 0.20±0.15     | 0.30±0.15 |           |
|                      | 2.00±0.15 | 1.25±0.15 | 1.20±0.10 | 0.40±0.10  | 0.175±0.10 | 0.35±0.15 | 0.30±0.15 | 0.65±0.10     | 0.20±0.10     | 0.20±0.15 | 0.50±0.10 |
|                      |           |           | 0.50±0.10 | 0.20±0.15  | 0.30±0.15  | 0.35±0.15 | 0.65±0.15 | 0.20±0.15     | 0.20±0.15     | 0.30±0.15 |           |
|                      |           |           | 0.60±0.10 | 0.20±0.15  | 0.30±0.10  | 0.35±0.10 | 0.65±0.10 | 0.20±0.15     | 0.20±0.15     | 0.50±0.10 |           |
|                      |           |           | 0.90±0.10 | 0.20±0.15  | 0.30±0.10  | 0.35±0.10 | 0.65±0.10 | 0.20±0.15     | 0.20±0.15     | 0.30±0.10 |           |
|                      |           |           | 1.00±0.10 | 0.20±0.15  | 0.30±0.10  | 0.35±0.10 | 0.65±0.10 | 0.20±0.10     | 0.20±0.15     | 0.50±0.10 |           |
|                      |           |           | 1.10±0.10 | 0.20±0.15  | 0.30±0.10  | 0.35±0.10 | 0.65±0.10 | 0.20±0.15     | 0.20±0.15     | 0.55±0.10 |           |
|                      | 2.50±0.20 | 2.00±0.20 | 0.85±0.10 | 0.35±0.20  | 0.40±0.10  | 0.30±0.10 | 0.70±0.20 | 0.15(Typical) | 0.15(Typical) | 1.20±0.20 |           |
| B                    | 1.95±0.15 | 1.25±0.15 | 0.80±0.10 | 0.175±0.15 | 0.30±0.15  | 0.35±0.15 | 0.65±0.15 | 0.25±0.15     | -             | -         |           |
|                      | 2.00±0.15 | 1.25±0.10 | 0.60±0.10 | 0.20±0.10  | 0.30±0.15  | 0.35±0.15 | 0.65±0.10 | 0.25±0.10     | -             | -         |           |



■ ELECTRICAL SPECIFICATION

2.4GHz BAND WORKING FREQUENCY



| Part Number        | Frequency Range (MHz) | Impedance(Ω) |  | Insertion Loss (dB)                     | Attenuation ( dB min. )  | VSWR (Max.) | Phase Difference | Amplitude Difference | Size (mm)      | STRUCTURE |
|--------------------|-----------------------|--------------|--|---|--|-------------|------------------|----------------------|----------------|-----------|
|                    |                       | Unbalance    | Balance  |   |  |             |                  |                      |                |           |
| RFBPB2012090A1T    | 2.4~2.5               | 50           | Conjugate match to BC series of Bluetooth chipset  | 3.5                                     | 35(880~960MHz)<br>30(1710~1880MHz)<br>20(1880~1990MHz)<br>30(4800~5000MHz)               | 2.1         | 180°± 10         | 2                    | 2.00x1.25x0.90 | A-1       |
| RFBPB2012090A9T    | 2.4~2.5               | 50           | Conjugate match to BC series of Bluetooth chipset  | 2.8                                     | 35(880~960MHz)<br>30(1575MHz)<br>25(1710~1880MHz)<br>30(4800~5000MHz)                    | 2.1         | 180°± 10         | 2                    | 2.00x1.25x0.90 | A-1       |
| RFBPB2012090AAT    | 2.4~2.5               | 50           | Conjugate match to CSR BC03/ 04 series   | 3.5                                     | 35(880~960MHz)<br>30(1710~1880MHz)<br>20(1880~1990MHz)<br>30(4800~5000MHz)               | 2.1         | 180°± 10         | 2                    | 2.00x1.25x0.90 | A-1       |
| RFBPB2012060ABT    | 2.4~2.5               | 50           | Impedance match to T.I. CC253X,CC254X, CC257X, CC853X and CC852X Chipsets  | 1.5max.(25°C)<br>1.7max.<br>(-40~+85°C) | 12(1000MHz)<br>15(4800~5000MHz)<br>20(7200~7500MHz)                                      | 2.0         | 180°± 15         | 2                    | 2.00x1.25x0.60 | B         |
| RFBPB2012080AET    | 2.4~2.5               | 50           | Impedance match to: Atmel AT86RF232, AT86RF233, ATMega256RF R2, Zigbit 256RFR2, Zigbit RF233, ZigBit RF233+FEM, Extension RF233, USB RF233 | 1.5max.(25°C)<br>1.7max.<br>(-40~+85°C) | 20(4800~5000MHz)<br>20(7200~7500MHz)   | 2.0         | 180°± 10         | 2                    | 1.95x1.25x0.80 | B         |
| RFBPB2012090AHT    | 2.4~2.5               | 50           | 100  | 3.5                                     | 30(880~960MHz)<br>30(1710~1880MHz)<br>20(1880~1990MHz)<br>30(4800~5000MHz)               | 2.0         | 180°± 10         | 2                    | 2.00x1.25x0.90 | A-1       |
| RFBPB2012090AM1T59 | 2.4~2.5               | 50           | Conjunction to MT5931/MT6628 Chipset   | 2.5 (typ.2.2)                           | 35( 824~960 MHz)<br>32(1990 MHz)<br>18(2170 MHz)<br>40(4800~5000MHz)<br>25(7200~7500MHz) | 2.0         | 180°± 10         | 2                    | 2.00x1.25x0.95 | A-1       |
| RFBPB2012090AM1T61 | 2.4~2.5               | 50           | Conjugate match to MTK MT6611 Bluetooth chipset  | 2.8                                     | 35(880~960MHz)<br>30(1710~1880MHz)<br>20(1880~1900MHz)<br>30(4800~5000MHz)               | 2.1         | 180°± 10         | 2                    | 2.00x1.25x0.90 | A-1       |
| RFBPB2012100A6T    | 2.4~2.5               | 50           | Conjugate match to BC series of Bluetooth chipset  | 3.5                                     | 35(880~960MHz)<br>30(1710~1880MHz)<br>20(1880~1900MHz)<br>40(4800~5000MHz)               | 2.0         | 180°± 10         | 2                    | 2.00x1.25x1.00 | A-1       |
| RFBPB2012110A5T    | 2.4~2.5               | 50           | 50   | 2.8                                     | 30(880~960 MHz)<br>30(1710~1880 MHz)<br>20(1880~1990 MHz)<br>30(4800~5000 MHz)           | 2.0         | 180°± 10         | 2                    | 2.00x1.25x1.10 | A-1       |
| RFBPB2520090A7T    | 2.4~2.5               | 50           | Conjugate match to TI BRF6150  | 3.5                                     | 35(880~960MHz)<br>30(1710~1880MHz)<br>25(1880~1990MHz)<br>25(4800~5000MHz)               | 2.0         | 180°± 15         | 1.5                  | 2.50x2.00x0.90 | A-2       |

■ TYPICAL ELECTRICAL CHARACTERISTICS



RFBPB2012090A1T

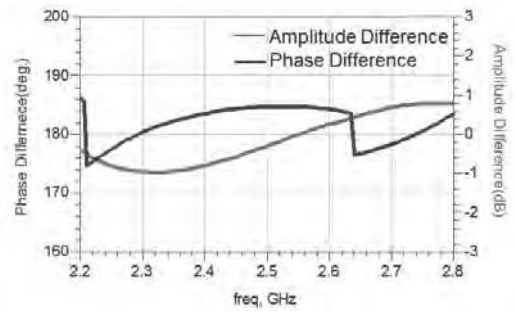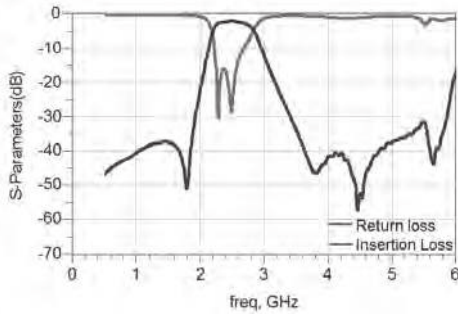



RFBPB2012090A9T

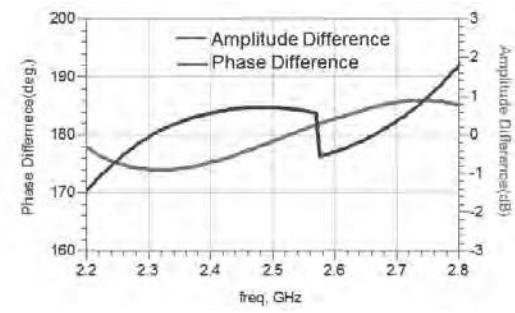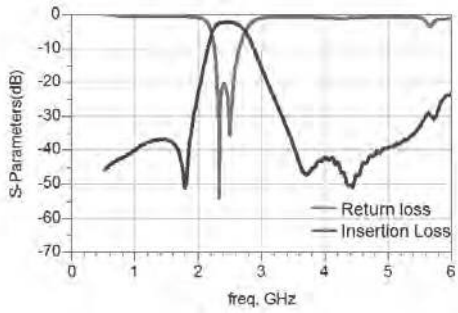



RFBPB2012060ABT

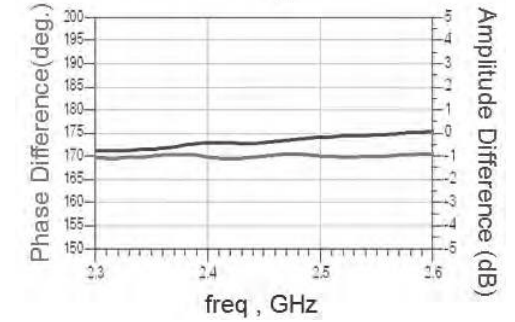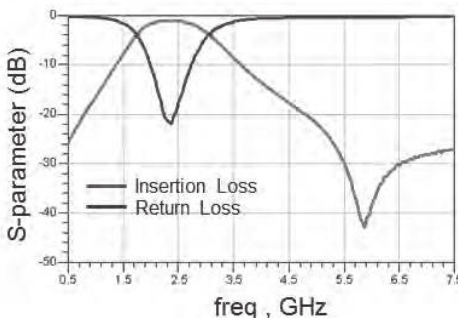

RFBPB2012080AET

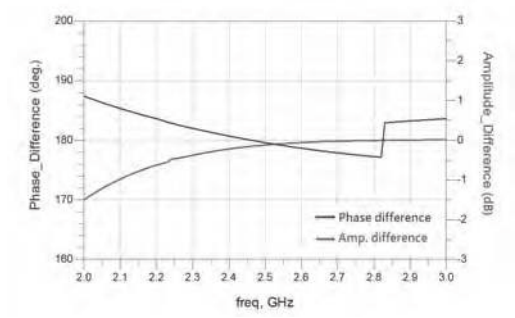
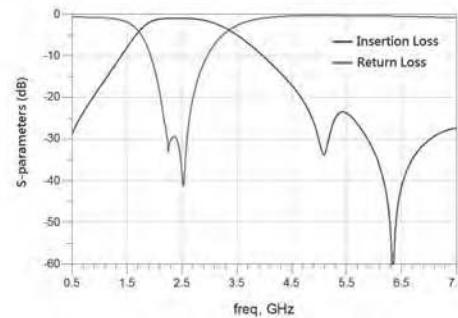


RFBPB2012090AHT

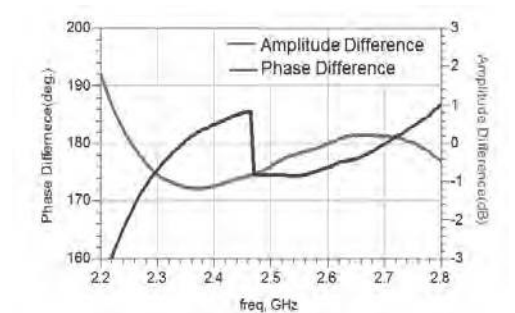
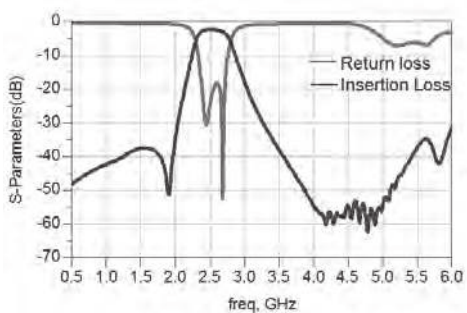


TYPICAL ELECTRICAL CHARACTERISTICS



RFBPB2012090AM1T59

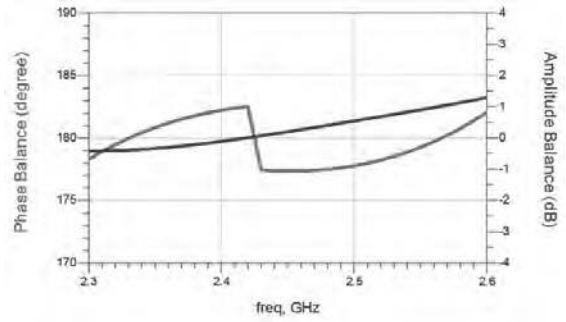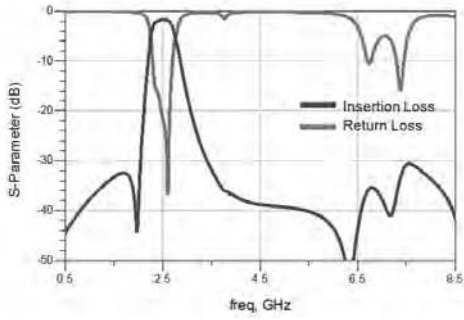



RFBPB2012090AM1T61

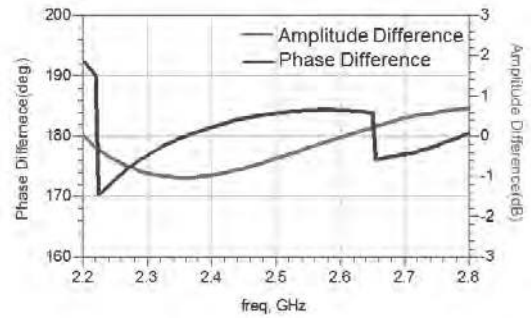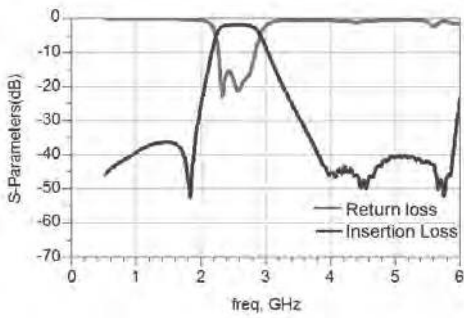

RFBPB2012100A6T

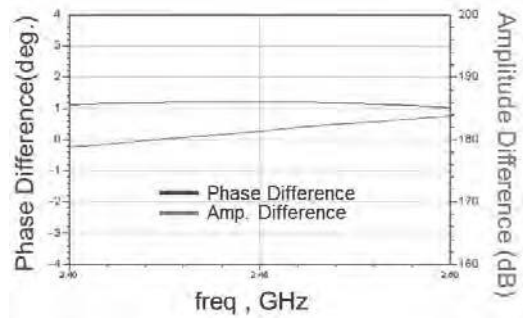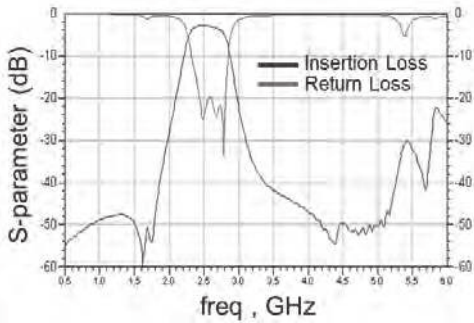

RFBPB2012090AM1T61

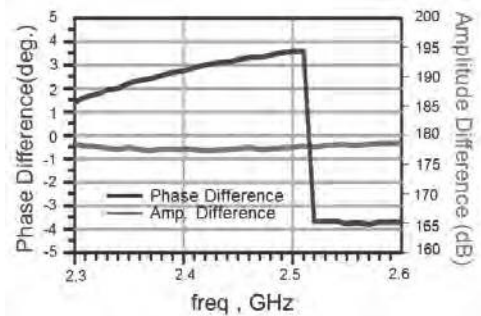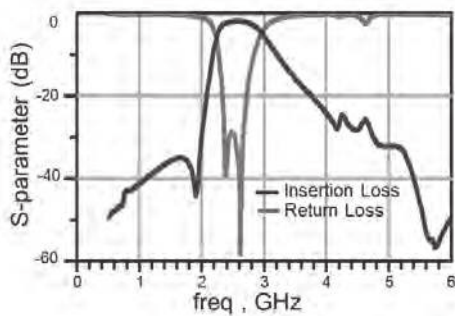

- For more information, please contact with local sales representative
- All specifications are subject to change without notice

HIGH FREQUENCY MULTILAYER LOW PASS FILTER

■ STRUCTURE AND PIN ASSOCIATED

| STRUCTURE A |                      | STRUCTURE C          |                      |             |             |
|-------------|----------------------|----------------------|----------------------|-------------|-------------|
|             | <p>STRUCTURE A-1</p> | <p>STRUCTURE A-2</p> |                      |             |             |
|             | <p>STRUCTURE A-3</p> | <p>STRUCTURE A-4</p> |                      |             |             |
| STRUCTURE B |                      |                      |                      |             |             |
|             | <p>STRUCTURE B-1</p> |                      | <p>STRUCTURE B-2</p> |             |             |
|             |                      |                      |                      |             |             |
| STRUCTURE D | STRUCTURE E          | STRUCTURE F          | STRUCTURE G          | STRUCTURE H | STRUCTURE I |
|             |                      |                      |                      |             |             |
|             |                      |                      |                      |             |             |

■ STRUCTURE AND DIMENSION

Unit: mm

| Structure\Dimension | L         | W         | T         | A          | B          | C         | D          | E          | F          |
|---------------------|-----------|-----------|-----------|------------|------------|-----------|------------|------------|------------|
| A                   | 1.60±0.15 | 0.80±0.15 | 0.50max.  | 0.20±0.10  | 0.24±0.10  | 0.24±0.10 | 0.50±0.10  | 0.15±0.10  | -          |
|                     |           |           | 0.60±0.10 | 0.175±0.15 | 0.25±0.15  | 0.25±0.15 | 0.50±0.15  | 0.20±0.15  | -          |
|                     |           |           | 0.65±0.10 | 0.175±0.15 | 0.25±0.15  | 0.25±0.15 | 0.50±0.15  | 0.20±0.15  | -          |
|                     |           |           | 0.70max.  | 0.175±0.15 | 0.25±0.15  | 0.25±0.15 | 0.50±0.15  | 0.20±0.15  | -          |
| B                   | 2.00±0.15 | 1.25±0.10 | 0.90±0.10 | 0.20±0.10  | 0.30±0.10  | 0.35±0.10 | 0.65±0.10  | 0.20±0.10  | 0.20±0.10  |
|                     |           |           | 0.95±0.10 | 0.20±0.10  | 0.30±0.10  | 0.35±0.10 | 0.65±0.10  | 0.20±0.10  | 0.20±0.10  |
|                     |           |           | 1.05±0.10 | 0.20±0.10  | 0.30±0.10  | 0.35±0.10 | 0.65±0.10  | 0.20±0.10  | 0.20±0.10  |
|                     | 3.20±0.20 | 2.50±0.20 | 1.00±0.20 | 0.10min.   | 0.55±0.15  | 0.45±0.15 | 1.00±0.15  | 0.30±0.15  | 0.70±0.20  |
| C                   | 1.00±0.10 | 0.50±0.10 | 0.40±0.10 | 0.35±0.10  | 0.30±0.10  | 0.15±0.10 | 0.15±0.10  | 0.30±0.10  | -          |
|                     | 1.60±0.15 | 0.80±0.15 | 0.50max.  | 0.45±0.15  | 0.70±0.15  | 0.20±0.15 | 0.20±0.15  | 0.30±0.15  | 0.25±0.15  |
| D                   | 0.65±0.10 | 0.50±0.10 | 0.40max.  | 0.225±0.10 | 0.20±0.05  | 0.10±0.05 | 0.25±0.05  | 0.025±0.25 | -          |
| E                   | 1.60±0.15 | 0.80±0.15 | 0.65max.  | 0.23±0.05  | 0.40±0.10  | 0.30±0.10 | 0.65±0.10  | 0.20±0.05  | 0.23±0.05  |
|                     |           |           | 0.60±0.10 | 0.23±0.05  | 0.40±0.10  | 0.30±0.10 | 0.65±0.10  | 0.20±0.05  | 0.23±0.05  |
|                     |           |           | 0.70max.  | 0.25±0.10  | 0.40±0.10  | 0.23±0.10 | 0.55±0.10  | 0.21±0.10  | 0.195±0.10 |
| F                   | 1.60±0.10 | 0.80±0.10 | 0.65max.  | 0.55±0.10  | 0.25±0.10  | 0.23±0.10 | 0.40±0.10  | 0.12±0.10  | 0.125±0.10 |
|                     |           |           |           | 0.60±0.10  | 0.25±0.10  | 0.25±0.10 | 0.40±0.10  | 0.10±0.05  | 0.10±0.05  |
|                     | 2.00±0.15 | 1.25±0.10 | 0.90±0.10 | 0.95±0.10  | 0.275±0.10 | 0.25±0.10 | 0.60±0.10  | 0.175±0.10 | 0.15±0.10  |
|                     |           |           | 1.00max.  | 0.95±0.10  | 0.275±0.10 | 0.25±0.10 | 0.60±0.10  | 0.175±0.10 | 0.15±0.10  |
| G                   | 1.00±0.10 | 0.50±0.10 | 0.40 max. | 0.18±0.05  | 0.18±0.05  | 0.05±0.05 | 0.125±0.05 | 0.15±0.05  | 0.05±0.05  |
| H                   | 3.20±0.20 | 2.50±0.20 | 1.00±0.20 | 0.95±0.20  | 0.60±0.20  | 0.30±0.15 | 0.70±0.15  | 1.20±0.15  | 2.00±0.15  |
|                     |           |           | 1.80±0.20 | 0.95±0.20  | 0.60±0.20  | 0.30±0.15 | 0.70±0.15  | 1.20±0.15  | 2.00±0.15  |
| I                   | 1.60±0.15 | 0.80±0.10 | 0.70±0.10 | 0.20±0.10  | 0.50±0.10  | 0.35±0.10 | 0.15±0.10  | -          | -          |

■ ELECTRICAL SPECIFICATION

GSM850/900GHz BAND WORKING FREQUENCY

| Part Number        | Frequency Range (MHz) | Insertion Loss (dB)  | Attenuation (dB min.)  | VSWR (max.) | Impedance (Ω) | Size(mm)       | Structure |
|--------------------|-----------------------|--|--|-------------|---------------|----------------|-----------|
| RFLPF06050G9D0T    | 824~915               | 0.5max.(25°C)<br>0.7max.(-40~+85°C)  | 20(2400~2750MHz)   | 2.0         | 50            | 0.65x0.50x0.40 | D         |
| RFLPF06050G9D2T    | 699~960               | 0.5max.(25°C)<br>0.7max.(-40~+85°C)  | 20(2400~2750MHz)   | 2.0         | 50            | 1.00x0.50x0.40 | D         |
| RFLPF10050G9D0T    | 824~915               | 0.6  | 25(1648~1830MHz)<br>25(2472~2745MHz)<br>25(3296~3660MHz)                     | 2.0         | 50            | 1.00x0.50x0.40 | C         |
| RFLPF10050G9D3T    | 824~915               | 0.5max.(25°C)<br>0.7max.(-40~+85°C)  | 25(1648~1830MHz)<br>25(2472~2745MHz)<br>25(3296~3660MHz)                     | 2.0         | 50            | 1.00x0.50x0.40 | C         |
| RFLPF10050G9D4T    | 699~915               | 0.5max.(25°C)<br>0.7max.(-40~+85°C)  | 25(1648~1830MHz)<br>25(2472~2745MHz)<br>25(3296~3660MHz)                     | 2.0         | 50            | 1.00x0.50x0.40 | C         |
| RFLPF10050G9D58Q1C | 814~915               | 0.5max.(25°C)<br>0.65max.(-40~+85°C)   | 18(1648~1830MHz)<br>17(2472~2745MHz)   | 2.0         | 50            | 1.00x0.50x0.40 | C         |
| RFLPF16080G9D4T    | 698~960               | 0.60(698~830MHz)<br>0.70(830~900MHz)<br>0.75(900~915MHz)<br>0.90(915~960MHz) | 30(1554~1830MHz)<br>35(2097~2745MHz)   | 1.6         | 50            | 1.60x0.80x0.65 | A-3       |
| RFLPF16080G9DET    | 698~960               | 0.4max.(25°C)<br>0.45max.(-40~+85°C)   | 15(1574~1605MHz)<br>23(1648~1830MHz)<br>23(1805~1850MHz)<br>23(4944~5850MHz) | 2.0         | 50            | 1.60x0.80x0.60 | E         |
| RFLPF16080G9DJT    | 434~960               | 0.6max.(25°C)<br>0.8max.(-40~+85°C)  | 25(1554~1610MHz)<br>30(1710~2700MHz)   | 2.0         | 50            | 1.60x0.80x0.65 | A-1       |
| RFLPF16080G9DM1T58 | 698~960               | 0.8  | 16(1565~1610MHz)<br>32(2110~2155MHz)   | 2.0         | 50            | 1.60x0.80x0.50 | A-4       |
| RFLPF10050G9DM1T76 | 698~960               | 0.6max.(25°C)<br>0.65max.(-40~+85°C)   | 13(1554~1610MHz)<br>35(1805~1830MHz)<br>35(2110~2170MHz)<br>30(1710~2700MHz) | 2.0         | 50            | 1.00x0.50x0.40 | G         |
| RFLPF20120G9D0T    | 890~915               | 0.6max.(25°C)<br>0.75max.(-40~+85°C)   | 30(1780~1830MHz)<br>30(2670~2745MHz)   | 2.0         | 50            | 2.00x1.25x0.95 | B-2       |
| RFLPF20120G9D1T    | 890~915               | 0.6max.(25°C)<br>0.75max.(-40~+85°C)   | 40(1720~1765MHz)<br>30(1780~1830MHz)<br>30(2670~2745MHz)                     | 2.0         | 50            | 2.00x1.25x0.95 | B-2       |

DCS/PCS BAND WORKING FREQUENCY

| Part Number        | Frequency Range (MHz) | Insertion Loss (dB)  | Attenuation (dB min.)   | VSWR (max.) | Impedance (Ω) | Size(mm)       | Structure |
|--------------------|-----------------------|--|---|-------------|---------------|----------------|-----------|
| RFLPF10051G8D0T    | 1710~1910             | 0.8  | 35(3420~3570MHz)<br>35(3700~3820MHz)<br>35(5130~5730MHz)  | 2.0         | 50            | 1.00x0.50x0.40 | C         |
| RFLPF10051G8DM5T51 | 1710~1910             | 0.6  | 26(3420~3570MHz)<br>21(3700~3820MHz)<br>21(5130~5730MHz)  | 2.0         | 50            | 1.00x0.50x0.40 | C         |
| RFLPF10051G8D8T    | 1880~2025             | 1.4max.(25°C)<br>1.6max.(-40~+85°C)  | 10(2400~2500MHz)<br>22(3760~4050MHz)<br>22(5150~5850MHz)<br>22(5640~6075MHz)                    | 2.0         | 50            | 1.00x0.50x0.40 | G         |
| RFLPF16081G8D3T    | 1710~1910             | 0.45max.(25°C)<br>0.55max.(-40~+85°C)  | 30(3420~3570MHz)<br>25(3700~3820MHz)<br>25(5130~5730MHz)  | 2.0         | 50            | 1.60x0.80x0.50 | C         |
| RFLPF16081G8D78Q1C | 1880~2025             | 1.4  | 25(2400~2500MHz)<br>18(4020~4045MHz)<br>25(6030~6075MHz)  | 2.0         | 50            | 1.60x0.80x0.60 | F         |
| RFLPF16081G8DC8Q1C | 1880~2170             | 0.60(1880~1920MHz)<br>0.70(1920~1980MHz)<br>0.80(2010~2170MHz)<br>2.00(2025~2170MHz) | 15(2400~2500MHz)<br>20(3760~4050MHz)<br>12(5150~5850MHz)<br>12(5640~6075MHz)<br>5(7520~8100MHz) | 2.0         | 20            | 1.60x0.80x0.60 | E         |
| RFLPF16081G8DHT    | 1710~1990             | 0.6max.(25°C)<br>0.8max.(-40~+85°C)  | 30.5(3420~3980MHz)<br>28.5(5130~5970MHz)<br>25.0(5970~12500MHz)                                 | 2.0         | 50            | 1.60x0.80x0.70 | I         |
| RFLPF20121G8D1T    | 1880~2025             | 1.35max.(25°C)<br>1.50max.(-40~+85°C)  | 38(2400~2500MHz)<br>25(4020~4045MHz)<br>27(6030~6075MHz)  | 1.9         | 50            | 2.00x1.20x0.90 | F         |

2.4GHz BAND WORKING FREQUENCY

| Part Number     | Frequency Range (MHz) | Insertion Loss (dB)                   | Attenuation (dB min.)  | VSWR (max.) | Impedance (Ω) | Size(mm)       | Structure |
|-----------------|-----------------------|---------------------------------------|--|-------------|---------------|----------------|-----------|
| RFLPF1005040A0T | 2450±50               | 0.45max.(25°C)<br>0.55max.(-40~+85°C) | 21(4800~5000MHz)<br>21(7200~7500MHz)   | 1.7         | 50            | 1.00x0.50x0.40 | C         |
| RFLPF1005040A1T | 2450±50               | 0.75                                  | 33(4800~5000MHz)<br>37(7200~7500MHz)   | 2.0         | 50            | 1.00x0.50x0.40 | C         |
| RFLPF1005040A2T | 2450±50               | 0.75max.(25°C)<br>0.90max.(-40~+85°C) | 32(4800~5000MHz)<br>35(7200~7500MHz)   | 2.0         | 50            | 1.00x0.50x0.40 | C         |
| RFLPF1608060AAT | 2450±50               | 0.65                                  | 20(3603~3720MHz)<br>30(4804~4960MHz)<br>10(6005~6200MHz)<br>20(7206~7440MHz)<br>10(8407~8680MHz)<br>20(9608~9920MHz)<br>10(10809~11160MHz)<br>10(12010~12400MHz)<br>10(13211~13640MHz)<br>15(14412~14880MHz)<br>10(15613~16120MHz)<br>10(16814~17360MHz) | 2.0         | 50            | 1.60x0.80x0.70 | A-1       |
| RFLPF1608060ABT | 2450±50               | 0.50                                  | 35(4800~5000MHz)<br>25(7200~7500MHz)   | 2.0         | 50            | 1.60x0.80x0.60 | A-1       |
| RFLPF1608060A0T | 2450±50               | 0.65<br>(typ.0.48)                    | 35(4800MHz(typ.40))<br>27(7200MHz(typ.40))   | 1.5         | 50            | 1.60x0.80x0.60 | A-1       |
| RFLPF1608060A1T | 2450±50               | 0.6                                   | 27(4800~5000MHz)<br>30(7200~7500MHz)   | 2.0         | 50            | 1.60x0.80x0.60 | A-2       |
| RFLPF1608060A2T | 2450±50               | 0.42                                  | 25(4800MHz)<br>18(7200MHz)   | 1.5         | 50            | 1.60x0.80x0.60 | A-1       |
| RFLPF1608060A9T | 2450±50               | 0.50max.(25°C)<br>0.60max.(-40~+85°C) | 20(3400MHz)<br>20(3600MHz)<br>30(4800~5000MHz)<br>30(7200~7500MHz)   | 2.0         | 50            | 1.60x0.80x0.60 | E         |
| RFLPF2012110A0T | 2450±50               | 0.7                                   | 30(2x(f0±BW/2))<br>20(3x(f0±BW/2))   | 1.5         | 50            | 2.00x1.25x1.05 | B-1       |

5GHz BAND WORKING FREQUENCY

| Part Number     | Frequency Range (MHz) | Insertion Loss (dB)           | Attenuation (dB min.)  | VSWR (max.) | Impedance (Ω) | Size(mm)       | Structure |
|-----------------|-----------------------|-------------------------------|--|-------------|---------------|----------------|-----------|
| RFLPF1608050K0T | 5400±500              | 0.60(25°C)<br>0.70(-40~+85°C) | 25(9800MHz)<br>30(11900MHz)<br>20(17850MHz)<br>(for reference) | 2.0         | 50            | 1.60x0.85x0.50 | C         |
| RFLPF2012090K0T | 5400±500              | 0.55(25°C)<br>0.65(-40~+85°C) | 30(9800MHz)<br>30(11800MHz)<br>20(17550MHz)<br>(for reference) | 2.0         | 50            | 2.00x1.25x0.90 | B-1       |

LTE BAND APPLICATION


| Part Number        | Frequency Range (MHz)              | Insertion Loss (dB)  | Attenuation (dB min. )   | VSWR (max.) | Impedance (Ω) | Size(mm)       | Structure |
|--------------------|------------------------------------|--|--|-------------|---------------|----------------|-----------|
| RFLPF1005040YM1T76 | 746~878                            | 0.60(25°C)<br>0.65(-40~+85°C)  | 30(1554~1610MHz)<br>25(2238~2361MHz)   | 2.0         | 50            | 1.00x0.50x0.40 | G         |
| RFLPF1608060Y08Q1C | 470~787                            | 0.65(25°C)<br>0.71(-40~+85°C)  | 26(1429~1501MHz)<br>30(1565~1607MHz)<br>35(1570~1580MHz)<br>18(1920~1980MHz)   | 2.0         | 50            | 1.60x0.85x0.65 | A-3       |
| RFLPF1608060Y18Q1C | 698~960                            | 0.60(698~830MHz)<br>0.70(830~900MHz)<br>0.75(900~915MHz)<br>0.90(915~960MHz) | 30(1554~1830MHz)<br>35(2097~2745MHz)   | 1.6         | 50            | 1.60x0.85x0.65 | A-3       |
| RFLPF2012090Y2T    | 400~470                            | 0.50(25°C)<br>0.65(-40~+85°C)  | 33(800~940MHz)   | 2.0         | 50            | 2.00x1.25x0.90 | F         |
| RFLPF2012090Y3T    | 500~700                            | 0.65(25°C)<br>0.80(-40~+85°C)  | 33(1000~1400MHz)   | 2.0         | 50            | 2.00x1.25x0.90 | F         |
| RFLPF2012100Y0T    | DC~500                             | 0.70   | 9(824~960MHz)<br>25(1710~1990MHz)<br>25(2400~4000MHz)  | 2.0         | 50            | 2.00x1.25x0.95 | B-2       |
| RFLPF1608060E0T    | 1400~2690                          | 0.25(25°C)<br>0.30(-40~+85°C)  | 25(4905~5845MHz)   | 1.92        | 50            | 1.60x0.85x0.65 | F         |
| RFLPF1608060F0T    | 600~2700                           | 0.50   | 30(4800~8000MHz)<br>25(8500~12500MHz)  | 2.0         | 50            | 1.60x0.85x0.65 | F         |
| RFLPF1608060F18Q1C | 673~2690                           | 0.50   | 35(4950~6000MHz)<br>35(6000~7500MHz)<br>35(7500~8100MHz)<br>35(8100~10500MHz)<br>27(10500~12500MHz)  | 2.0         | 50            | 1.60x0.85x0.65 | F         |
| RFLPF1608060F88Q1C | 10~2700                            | 0.5  | 30(4900~5950MHz)   | 2.0         | 50            | 1.60x0.85x0.65 | E         |
| RFLPF1608060FAT    | 673~2690                           | 0.25(25°C)<br>0.35(-40~+85°C)  | 25(4905~5845MHz)   | 1.92        | 50            | 1.60x0.85x0.65 | F         |
| RFLPF2012100F18Q1C | 1710~2170                          | 1.30(25°C)<br>1.50(-40~+85°C)  | 15(2400~2500MHz)<br>25(3250~3350MHz)<br>25(3420~3570MHz)<br>23(3700~3820MHz)<br>23(3840~3960MHz)<br>23(4100~4600MHz)<br>25(4905~5845MHz)<br>23(5850~6400MHz)<br>20(6600~7350MHz) | 1.56        | 50            | 2.00x1.25x1.00 | B-2       |
| RFLPF2012100F28Q1C | DC~2170                            | 0.75(25°C)<br>0.85(-40~+85°C)  | 10(2400~2500MHz)<br>23(3250~3350MHz)<br>20(3420~3570MHz)<br>18(3700~3820MHz)<br>18(3840~3960MHz)<br>18(4100~4600MHz)<br>20(4905~5845MHz)<br>18(5850~6400MHz)<br>5(6600~7350MHz)  | 2.0         | 50            | 2.00x1.25x1.00 | F         |
| RFLPF16082G6W0T    | 2400~2690                          | 0.6  | 26(4800~5390MHz)<br>23(7200~8085MHz)   | 2.0         | 50            | 1.60x0.80x0.60 | A-2       |
| RFLPF16082G6W2T    | 2300~2700                          | 0.40(25°C)<br>0.43(-40~+85°C)  | 21(4600~5400MHz)<br>22(6900~8100MHz)   | 2.0         | 50            | 1.60x0.80x0.60 | A-2       |
| RFLPF16082G5W0T    | 2300~2700                          | 0.90(25°C)<br>1.00(-40~+85°C)  | 30(4600~5400MHz)<br>30(6900~8100MHz)<br>20(9200~10800MHz)<br>15(11500~13500MHz)  | 1.8         | 50            | 1.60x0.80x0.60 | A-1       |
| RFLPF16082G5WM0T29 | 2300~2690                          | 0.80<br>(typ.0.40)   | 25(4600~5400MHz)<br>25(6900~8070MHz)   | 2.0         | 50            | 1.60x0.80x0.60 | A-1       |
| RFLPF16083G5W7T    | 3300~3800                          | 0.55   | 17(6600~7600MHz)<br>20(9900~11400MHz)  | 1.9         | 50            | 1.60x0.80x0.60 | A-3       |
| RFLPF2012090BM0T29 | 800~1000<br>1700~1910<br>2010~2025 | 0.5(800~1000MHz)<br>0.8(1700~1910MHz)<br>1.5(2010~2025MHz)                   | 20(2300~3700MHz)<br>30(3700~4100MHz)<br>20(4100~6100MHz)<br>10(6100~8000MHz)   | 2.0         | 50            | 2.00x1.25x0.90 | F         |

MoCA APPLICATION


| Part Number        | Frequency Range (MHz) | Insertion Loss (dB)          | Attenuation (dB min. )               | VSWR (max.) | Impedance (Ω) | Size(mm)       | Structure |
|--------------------|-----------------------|------------------------------|--------------------------------------|-------------|---------------|----------------|-----------|
| RFLPF3225180Y1T    | 54~870                | 2.5                          | 35(975~1675MHz)                      | 2.0         | 75            | 3.20x2.50x1.80 | H         |
| RFLPF3225100Q07B1U | 5~1002                | 2.4(25°C)<br>2.6(-40~+85°C)  | 36(1125~1675MHz)                     | 2.0         | 75            | 3.20x2.50x1.00 | H         |
| RFLPF3225100Q2T    | 5~1002                | 2.4(25°C)<br>2.6(-40~+85°C)  | 28(1125~1675MHz)                     | 1.9         | 75            | 3.20x2.50x1.00 | B-1       |
| RFLPF3225200Q5T    | 5~1002                | 1.8(25°C)<br>2.05(-40~+85°C) | 33(1125~1400MHz)<br>26(1400~1675MHz) | 2.0         | 75            | 3.20x2.50x1.80 | H         |




■ TYPICAL ELECTRICAL CHARACTERISTICS

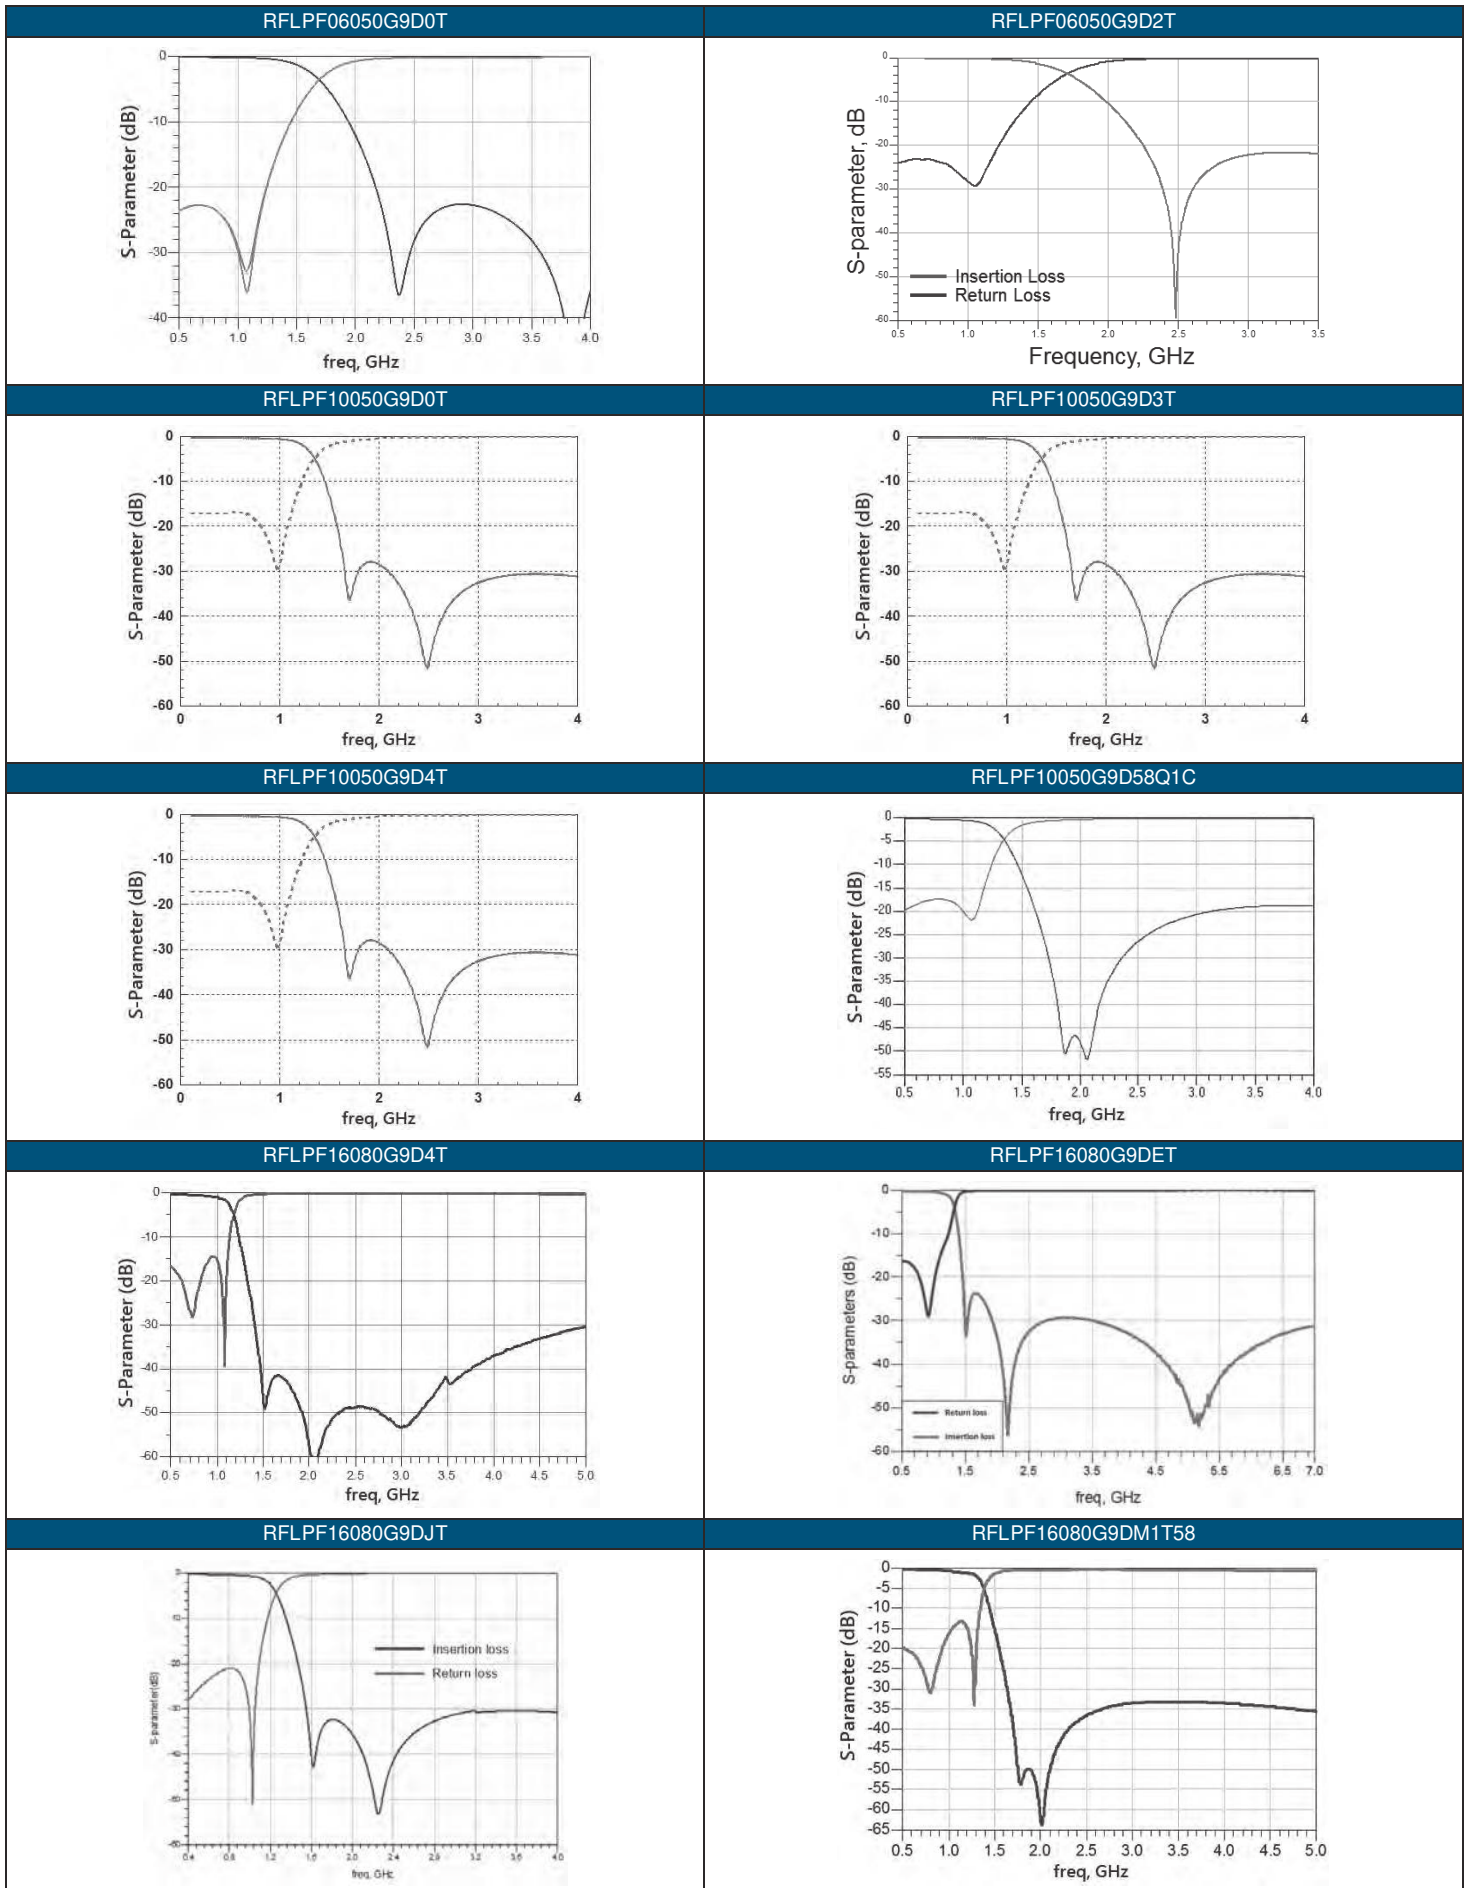


TYPICAL ELECTRICAL CHARACTERISTICS

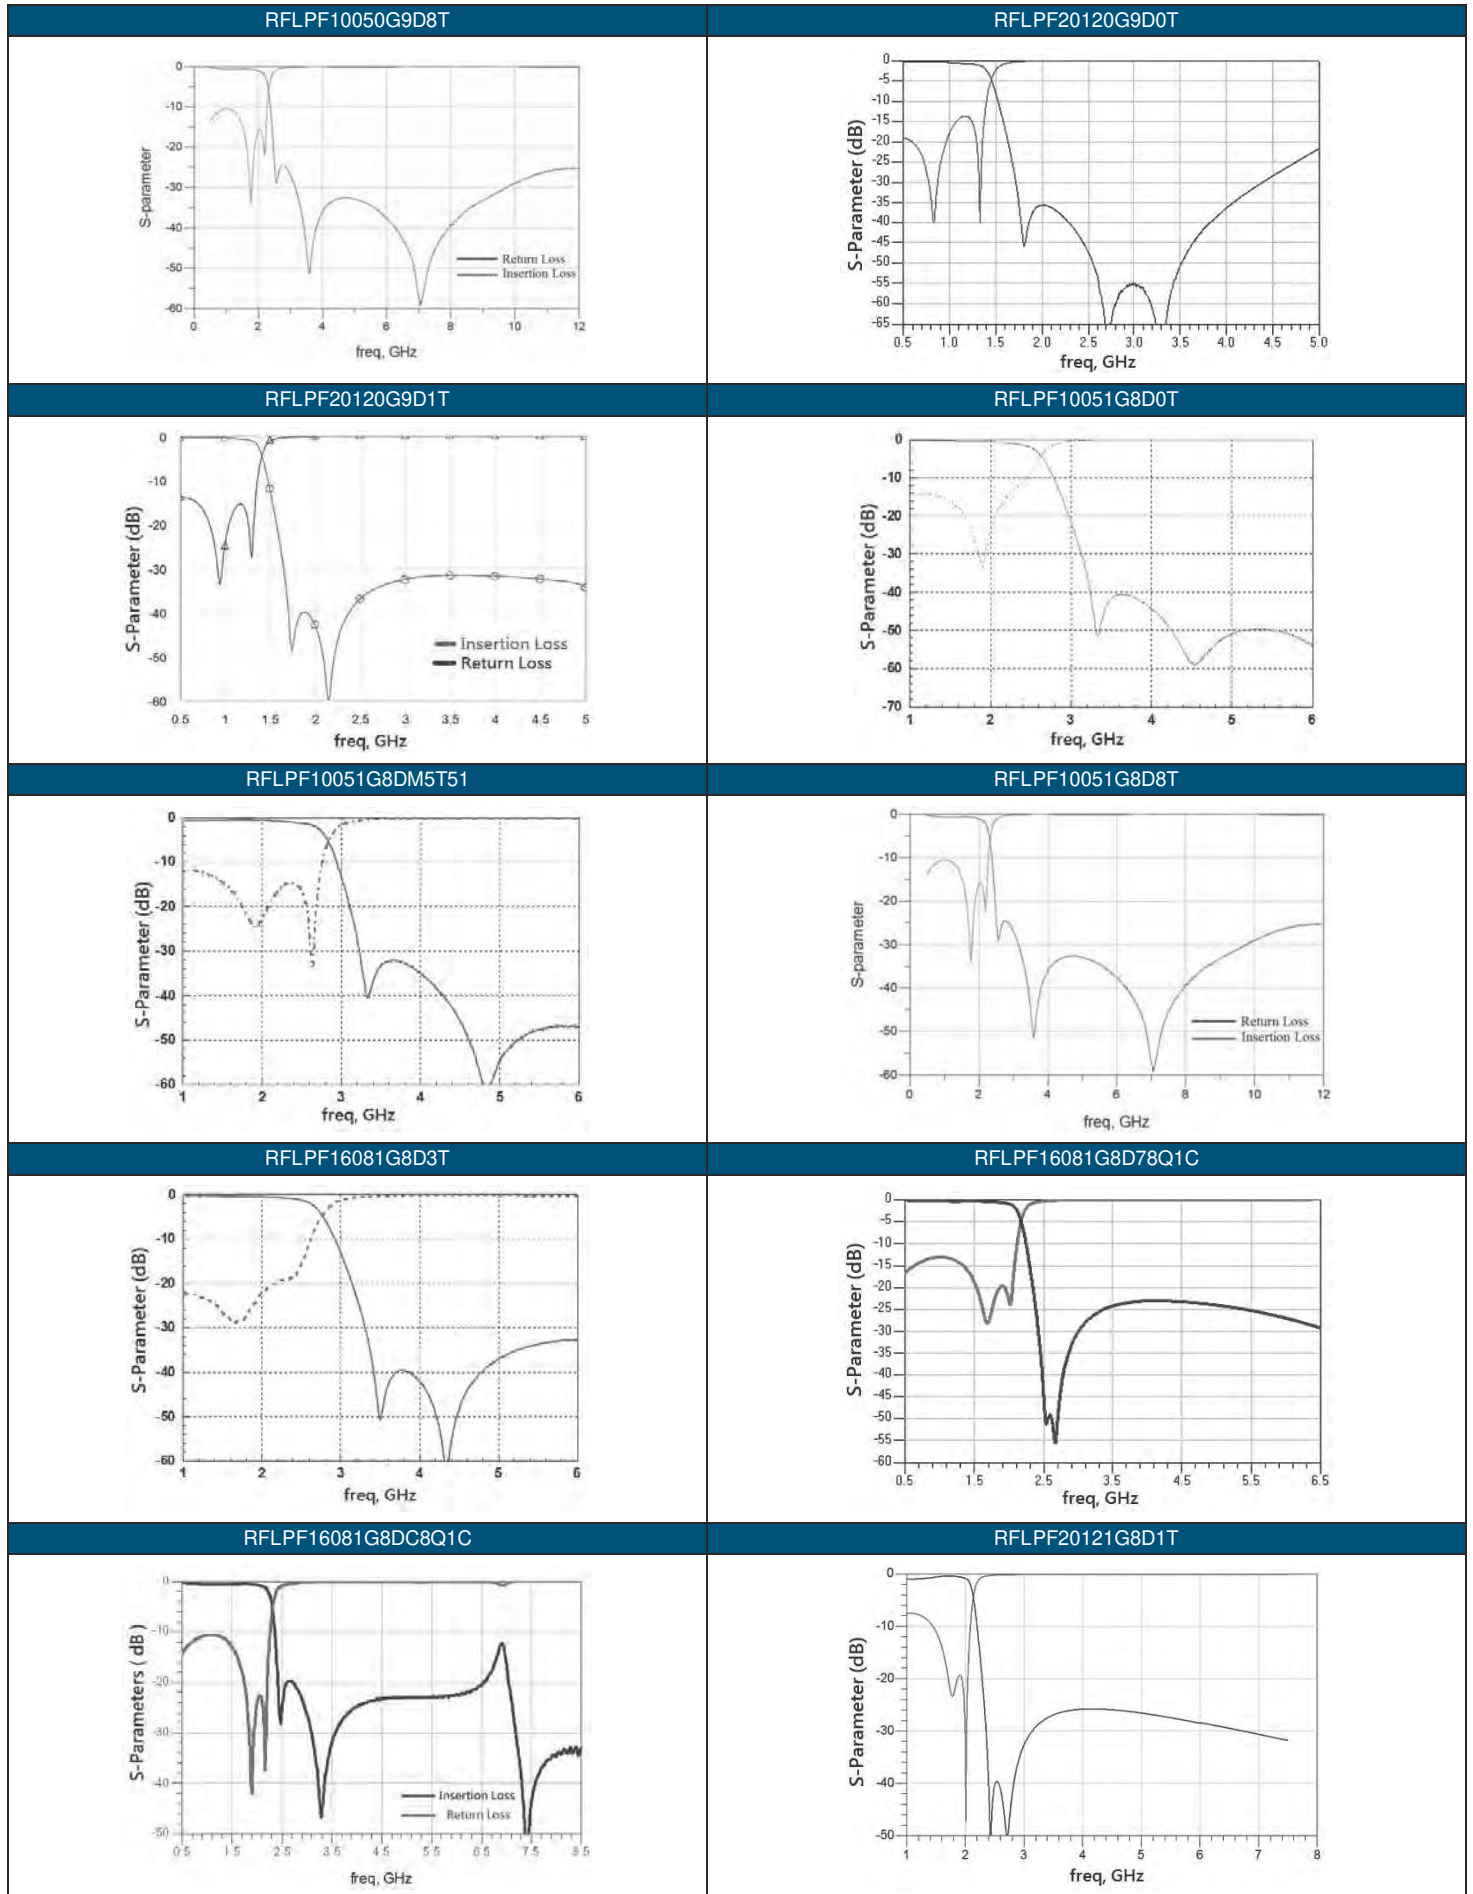


TYPICAL ELECTRICAL CHARACTERISTICS

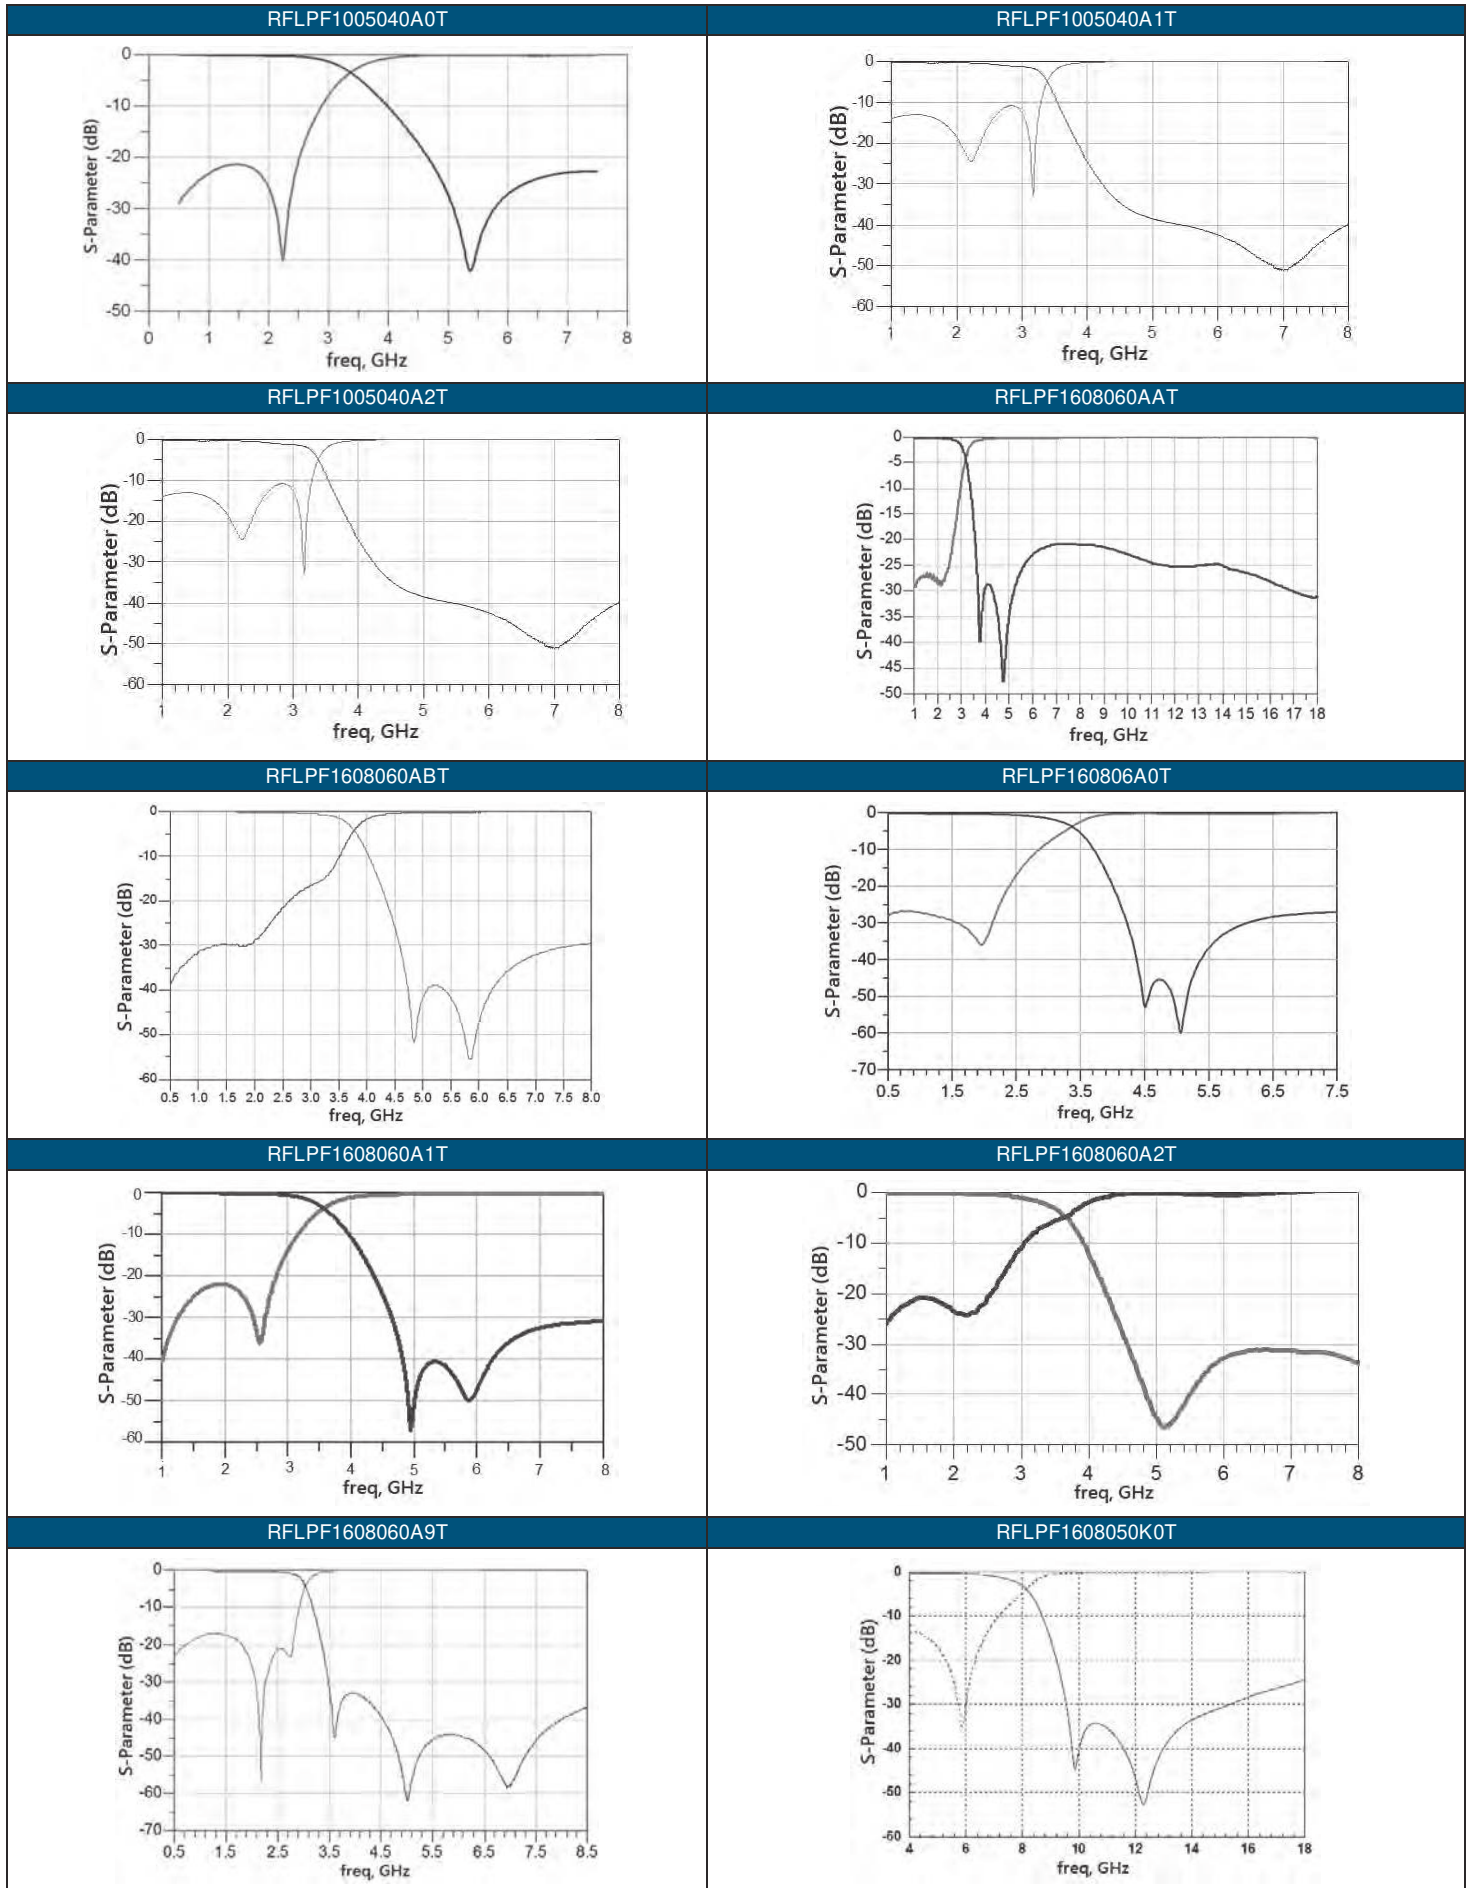


TYPICAL ELECTRICAL CHARACTERISTICS

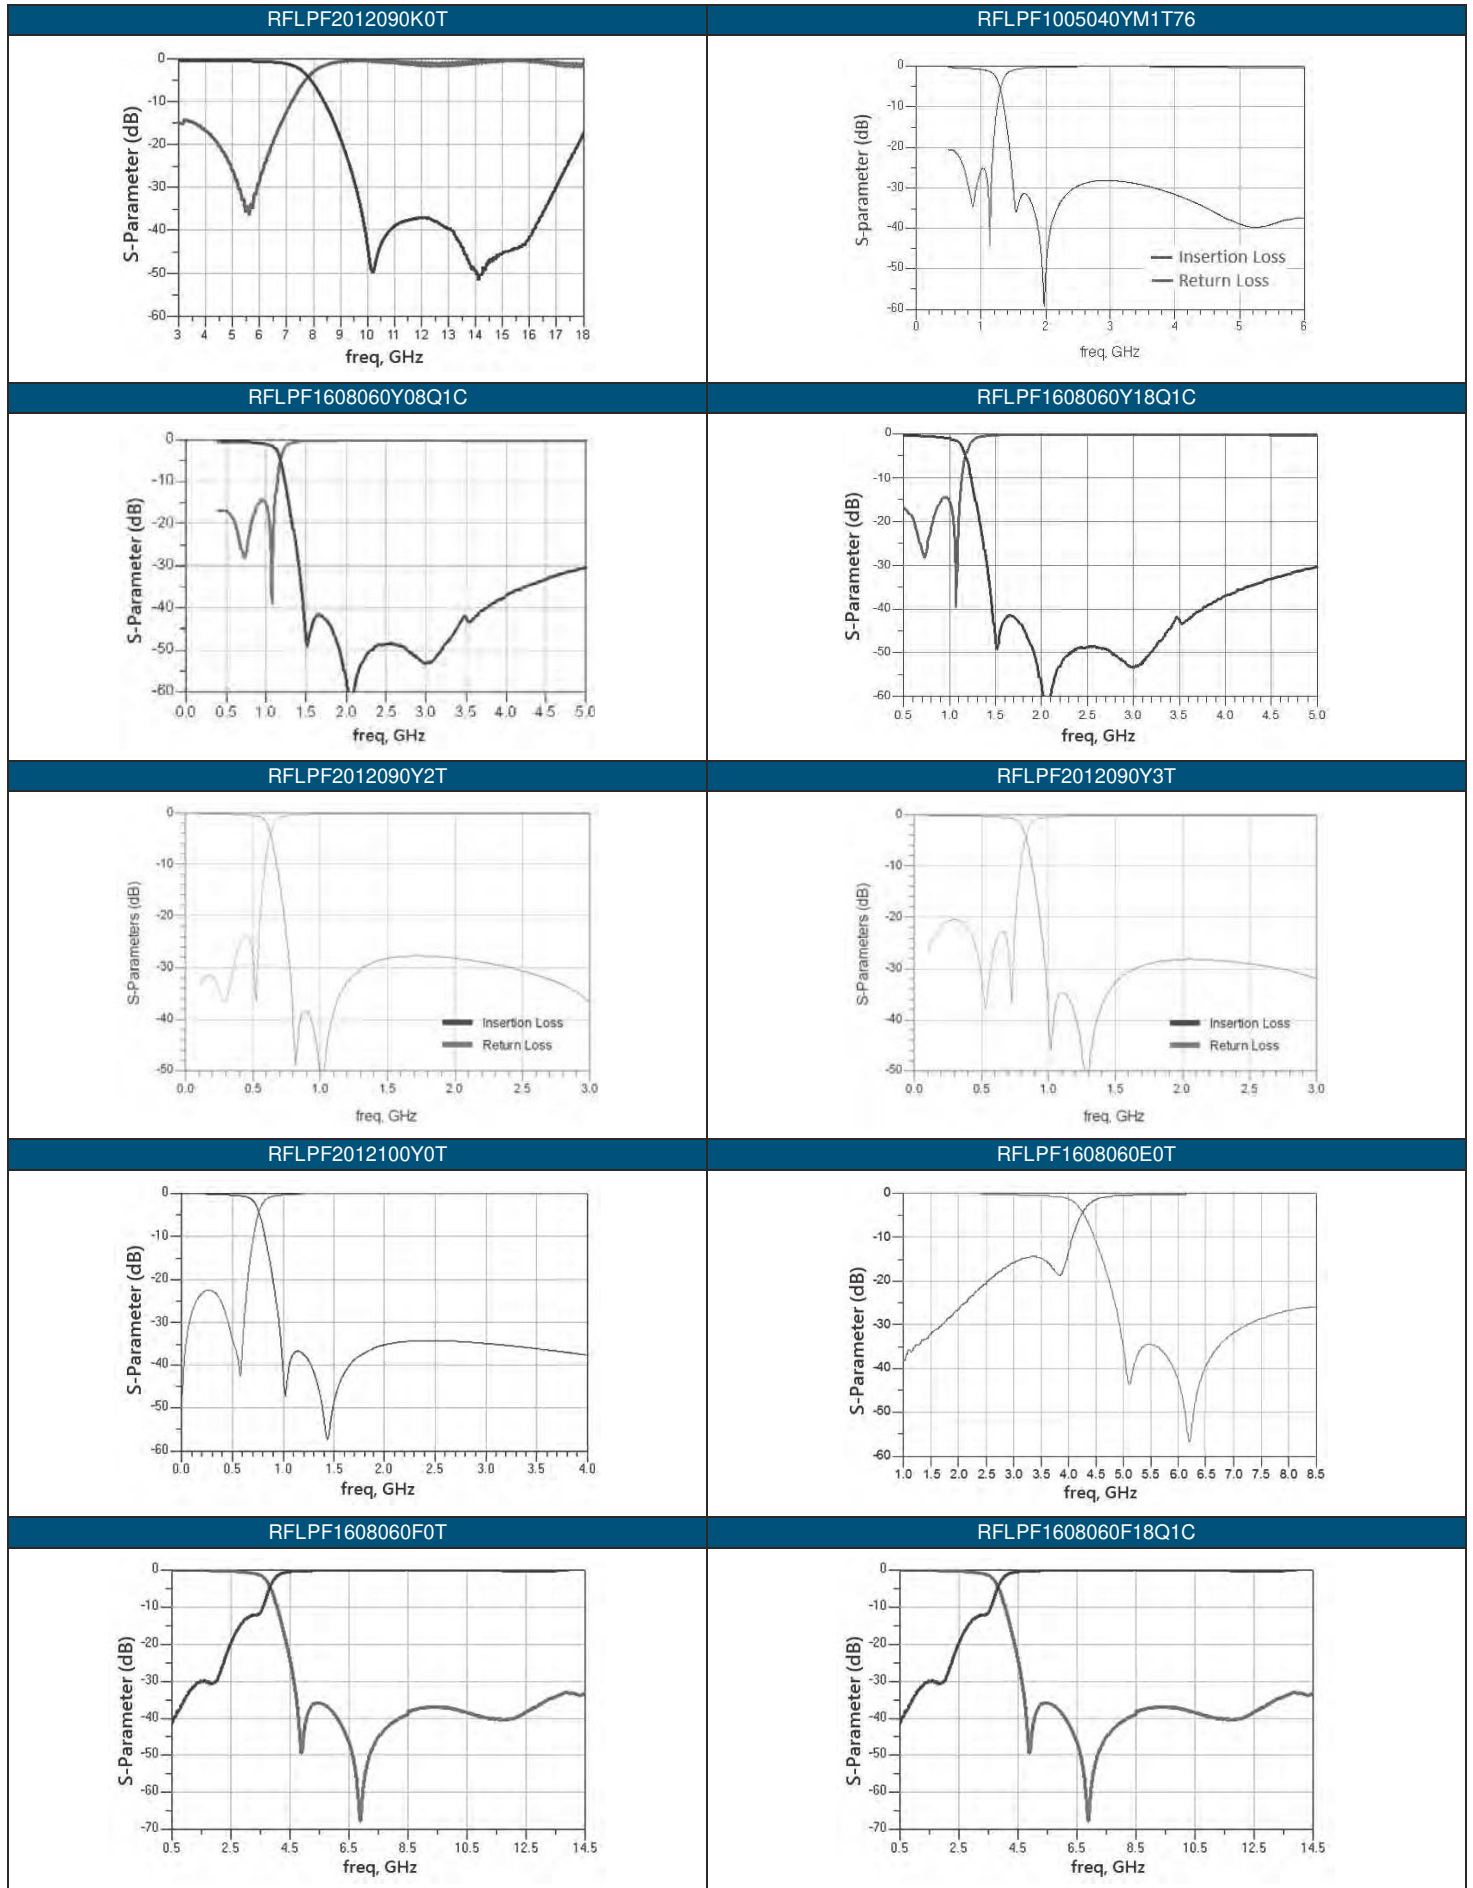

TYPICAL ELECTRICAL CHARACTERISTICS

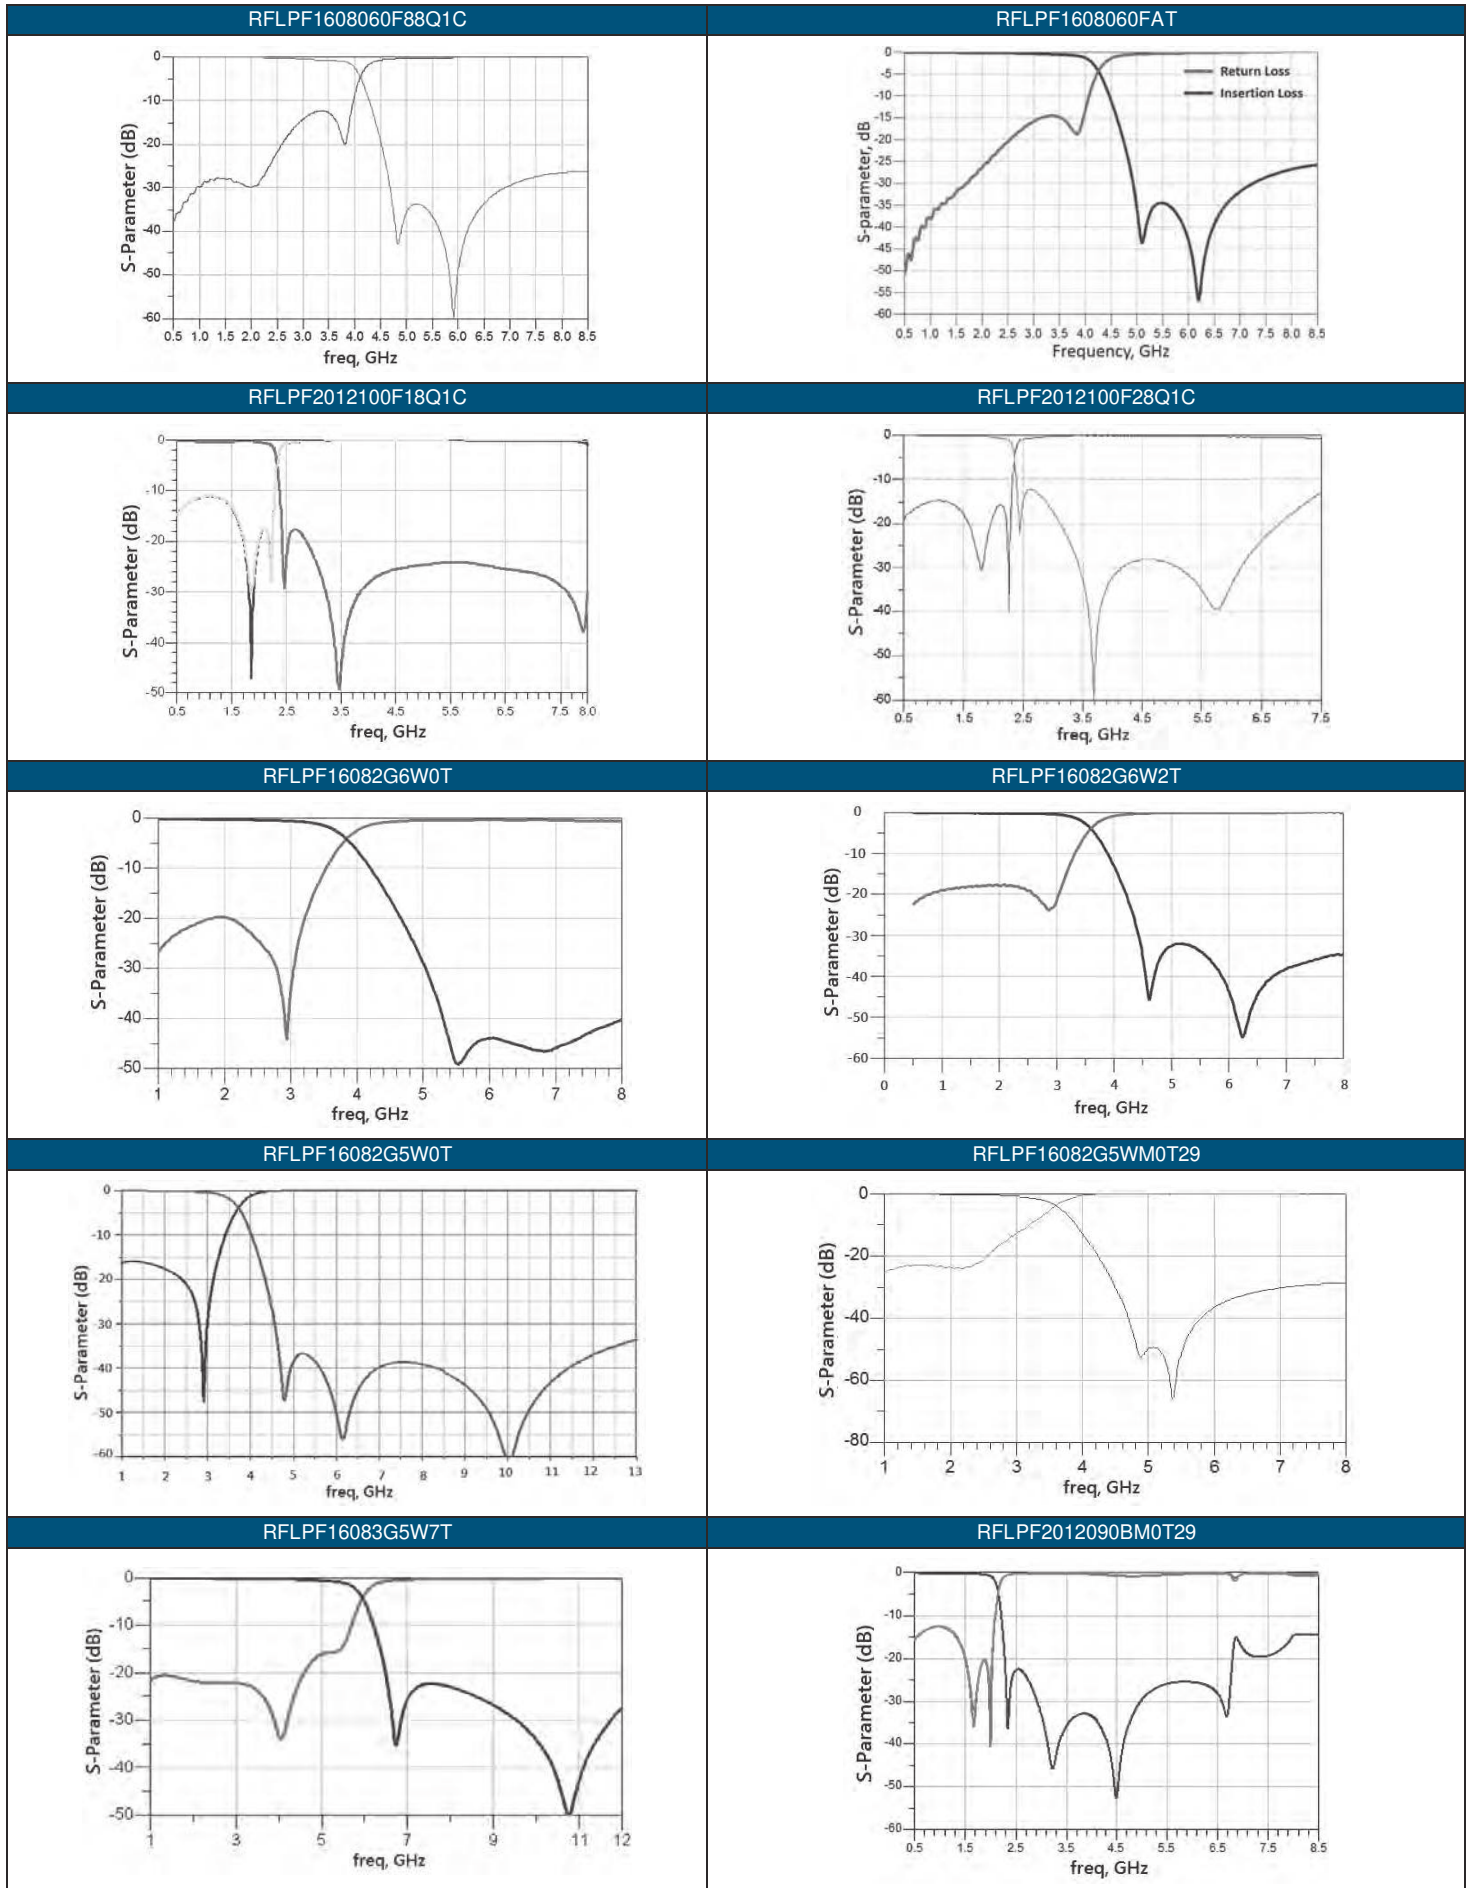


TYPICAL ELECTRICAL CHARACTERISTICS

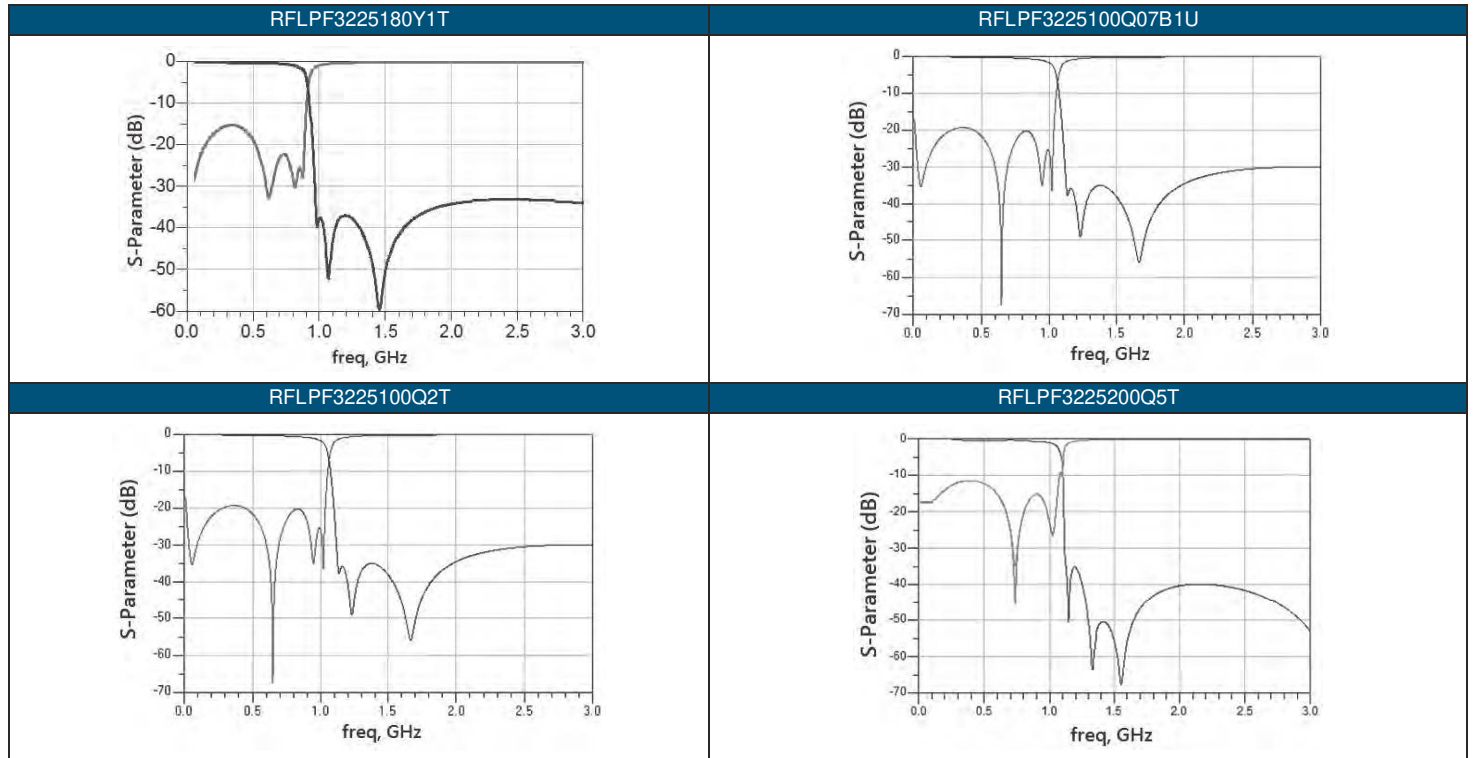

- For more information, please contact with local sales representative
- All specifications are subject to change without notice

## HIGH FREQUENCY MULTILAYER HIGH PASS FILTER

### ■ STRUCTURE AND PIN ASSOCIATED

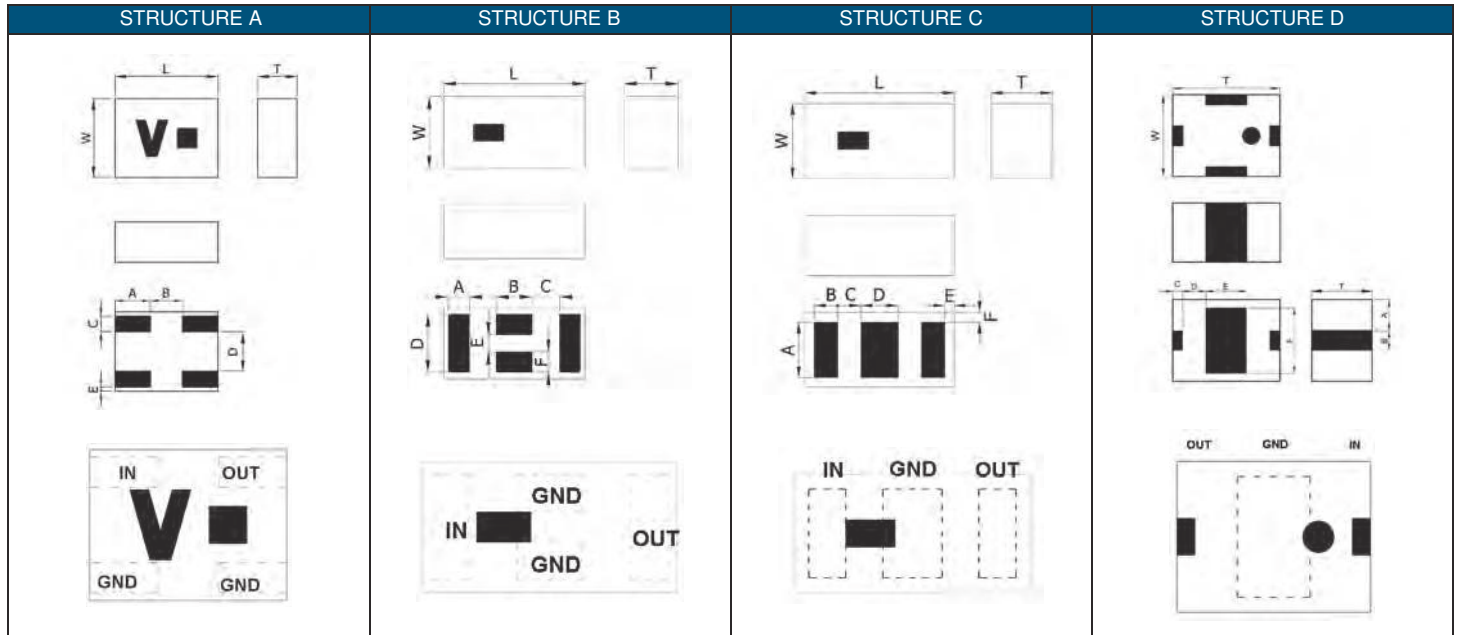

### ■ STRUCTURE AND DIMENSION

Unit: mm

| Structure/Dimension | L           | W           | T            | A            | B           | C            | D           | E            | F            |
|---------------------|-------------|-------------|--------------|--------------|-------------|--------------|-------------|--------------|--------------|
| A                   | 0.65 ± 0.10 | 0.50 ± 0.10 | 0.4 max.     | 0.225 ± 0.10 | 0.20 ± 0.05 | 0.10 ± 0.10  | 0.20 ± 0.05 | 0.05 ± 0.05  | -            |
| B                   | 1.60 ± 0.15 | 0.80 ± 0.15 | 0.60 ± 0.1.0 | 0.23 ± 0.05  | 0.40 ± 0.10 | 0.30 ± 0.10  | 0.65 ± 0.10 | 0.20 ± 0.05  | 0.23 ± 0.05  |
| C                   | 1.60 ± 0.10 | 0.80 ± 0.10 | 0.65 max.    | 0.65 ± 0.10  | 0.25 ± 0.10 | 0.275 ± 0.10 | 0.40 ± 0.10 | 0.075 ± 0.05 | 0.075 ± 0.05 |
| D                   | 3.20 ± 0.20 | 2.50 ± 0.20 | 1.7 max.     | 0.95 ± 0.20  | 0.60 ± 0.20 | 0.30 ± 0.15  | 0.70 ± 0.15 | 1.20 ± 0.15  | 2.00 ± 0.15  |

### ■ ELECTRICAL SPECIFICATION

#### 2496 ~ 2690 MHz BAND WORKING FREQUENCY

| Part Number      | Frequency Range (MHz) | Insertion Loss (dB)                 | Attenuation (dB min. ) | VSWR (max.) | Size (mm)       | Structure |
|------------------|-----------------------|-------------------------------------|------------------------|-------------|-----------------|-----------|
| RFHPPF16082G5W0T | 2496~2690             | 1.2max.(25°C)<br>1.3max.(-40~+85°C) | 25(1710~1995MHz)       | 2.0         | 1.6 X 0.8 X 0.6 | B         |
| RFHPPF16082G5W1T | 2496~2690             | 0.9max.(25°C)<br>1.2max.(-40~+85°C) | 22(1710~2010MHz)       | 2.0         | 1.6 X 0.8 X 0.6 | C         |


#### 5GHz BAND WORKING FREQUENCY

| Part Number      | Frequency Range (MHz) | Insertion Loss (dB)                   | Attenuation (dB min. ) | VSWR (max.) | Size (mm)        | Structure |
|------------------|-----------------------|---------------------------------------|------------------------|-------------|------------------|-----------|
| RFHPPF0605040K0T | 4900~5840             | 0.60max.(25°C)<br>0.65max.(-40~+85°C) | 14(2400~2500MHz)       | 1.6         | 0.65 X 0.5 X 0.4 | A         |
| RFHPPF0605040K1T | 4900~5850             | 0.65                                  | 20(2450~2500MHz)       | 2.0         | 0.65 X 0.5 X 0.4 | A         |

#### MoCA Application

| Part Number         | Frequency Range (MHz) | Insertion Loss (dB)                  | Attenuation (dB min. ) | VSWR (max.) | Size (mm)       | Structure |
|---------------------|-----------------------|--------------------------------------|------------------------|-------------|-----------------|-----------|
| RFHPPF3225170F07B1U | 950~2150              | 2.00max.(25°C)<br>2.2max.(-40~+85°C) | 50(475~675MHz)         | 2.0         | 3.2 X 2.5 X 1.7 | D         |

■ TYPICAL ELECTRICAL CHARACTERISTICS




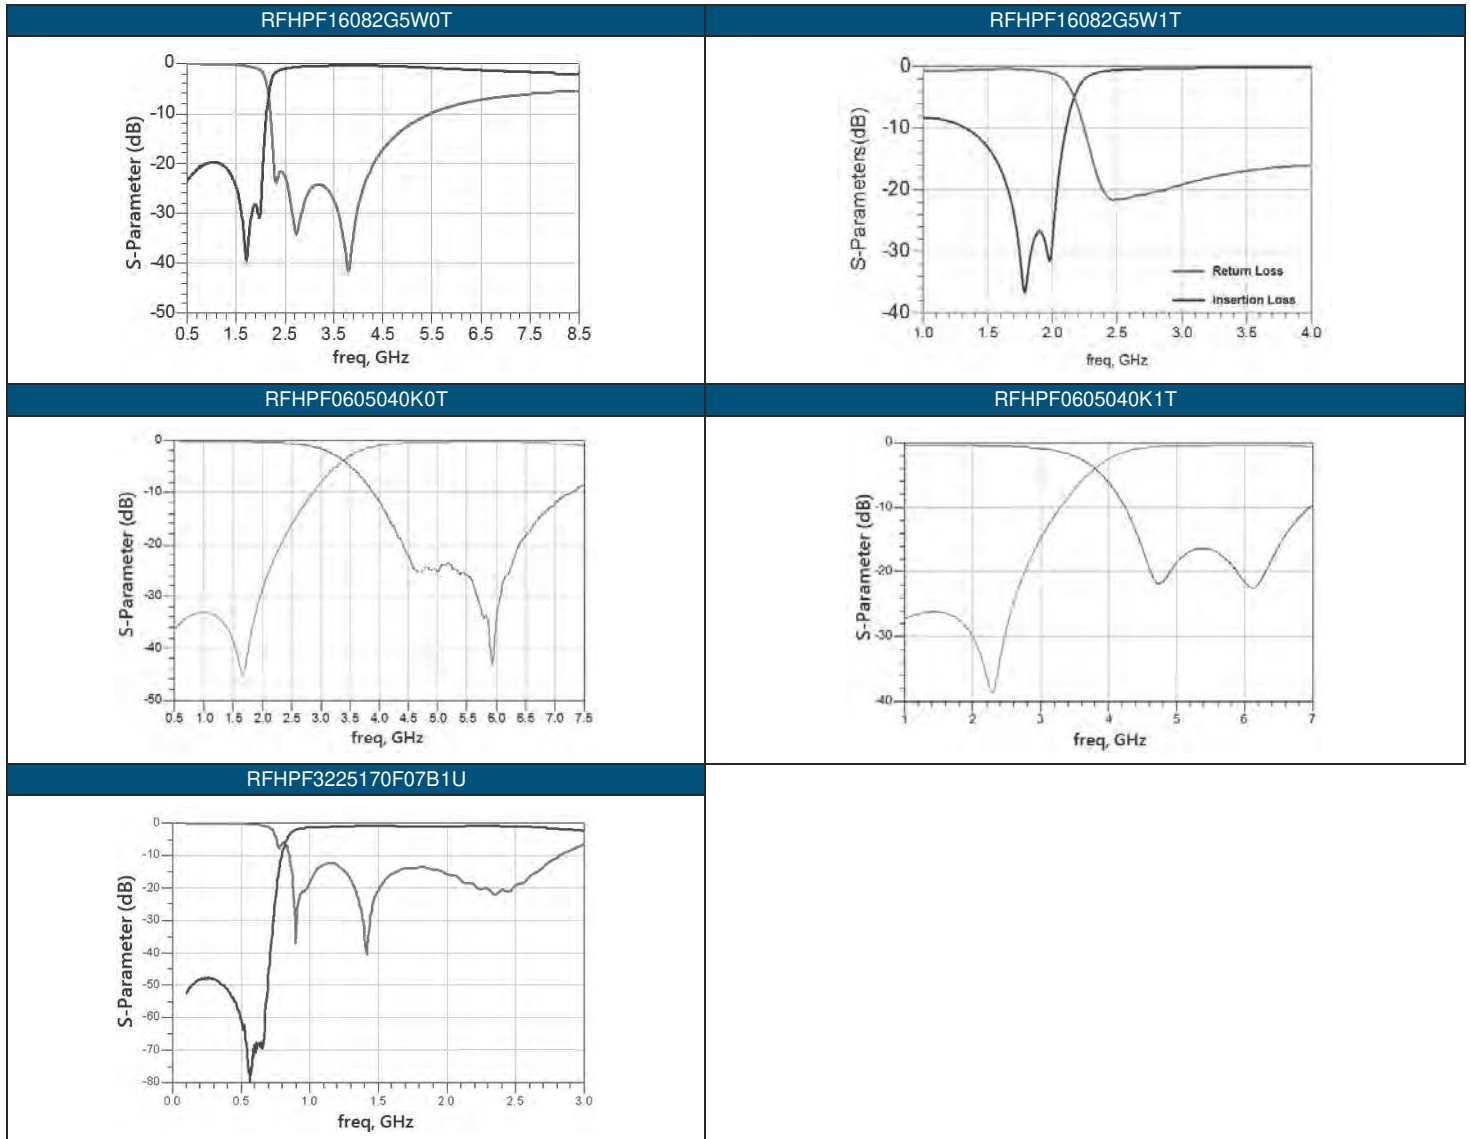


- For more information, please contact with local sales representative
- All specifications are subject to change without notice



BALUN TRANSFORMERS

■ STRUCTURE AND PIN ASSOCIATED

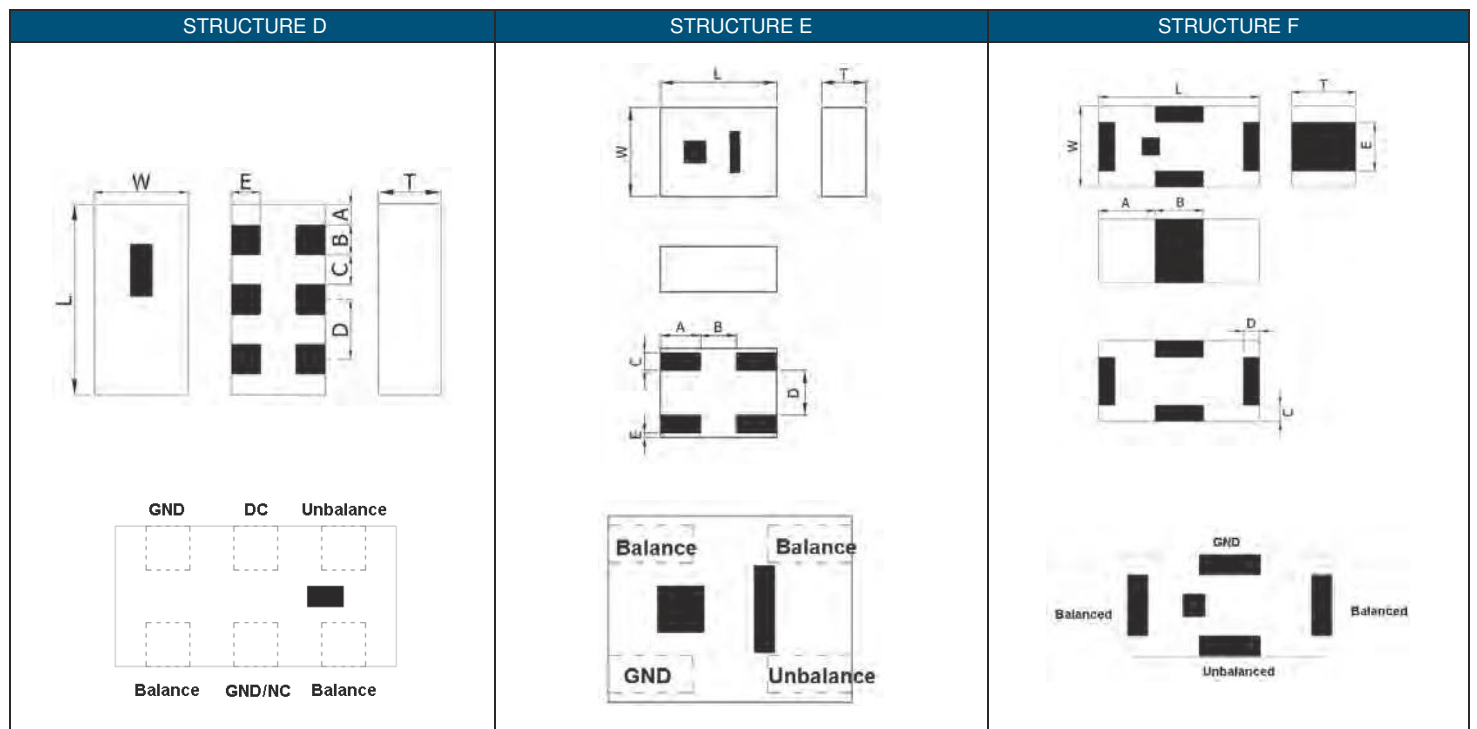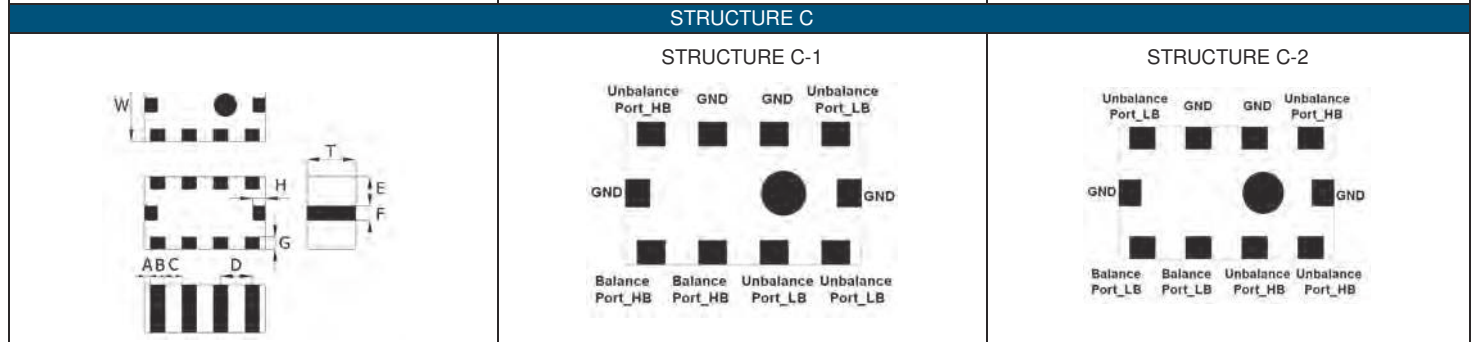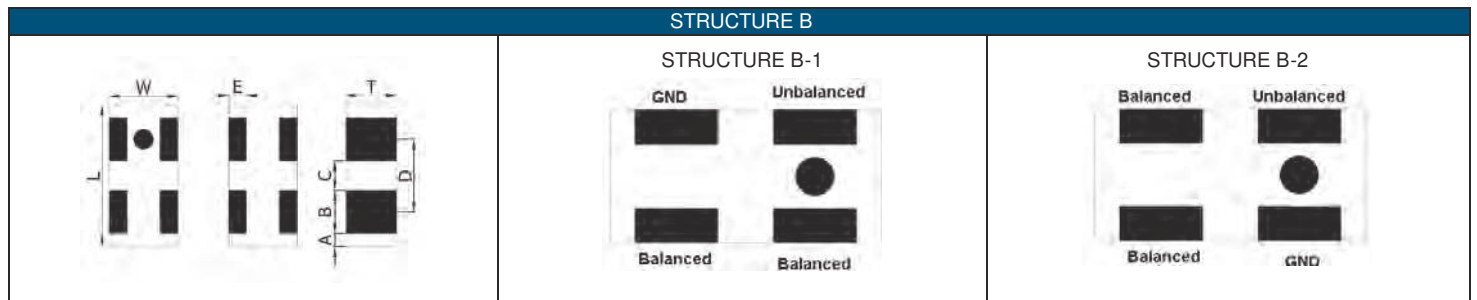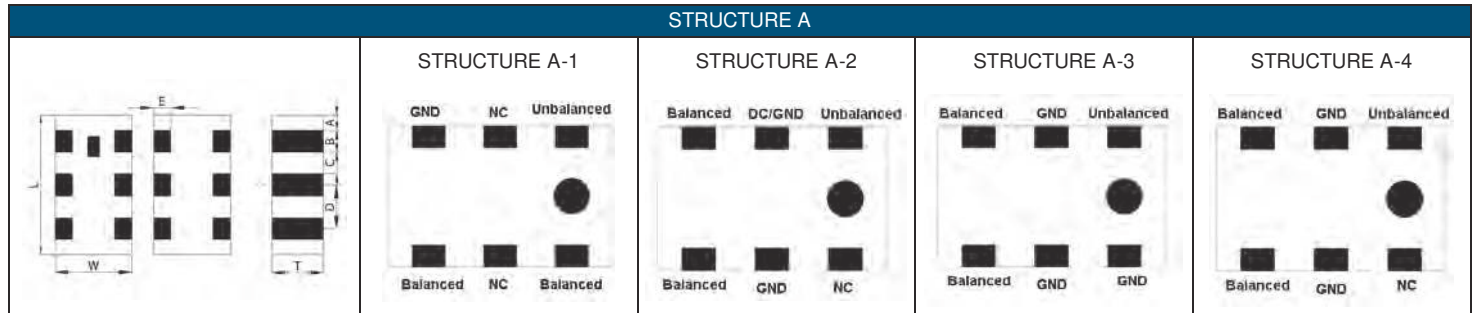

■ STRUCTURE AND DIMENSION

Unit: mm

| Structure/Dimension | L         | W         | T         | A          | B         | C           | D         | E          | F           | G         | H         |
|---------------------|-----------|-----------|-----------|------------|-----------|-------------|-----------|------------|-------------|-----------|-----------|
| A                   | 1.60±0.10 | 0.85±0.10 | 0.70±0.10 | 0.20±0.10  | 0.20±0.10 | 0.30±0.10   | 0.50±0.05 | 0.50±0.05  | -           | -         | -         |
|                     | 1.60±0.15 | 0.80±0.10 | 0.50±0.10 | 0.175±0.15 | 0.25±0.15 | 0.25±0.15   | 0.50±0.15 | 0.20±0.15  | -           | -         | -         |
|                     |           | 0.85±0.10 | 0.40 max. | 0.175±0.15 | 0.25±0.15 | 0.25±0.15   | 0.50±0.15 | 0.20±0.15  | -           | -         | -         |
|                     |           |           | 0.60±0.10 | 0.175±0.15 | 0.25±0.15 | 0.25±0.15   | 0.50±0.15 | 0.20±0.15  | -           | -         | -         |
|                     |           | 0.85±0.15 | 0.70±0.10 | 0.175±0.15 | 0.25±0.15 | 0.25±0.15   | 0.50±0.15 | -          | -           | -         | -         |
|                     | 0.65±0.10 |           | -         |            |           |             |           | -          | -           | -         |           |
|                     | 2.00±0.15 | 1.25±0.15 | 0.80±0.10 | 0.20±0.20  | 0.30±0.20 | 0.35±0.20   | 0.65±0.20 | -          | -           | -         | -         |
|                     |           |           | 0.85±0.10 | 0.20±0.20  | 0.30±0.20 | 0.35±0.20   | 0.65±0.20 | -          | -           | -         | -         |
|                     |           |           | 0.80±0.10 | 0.20±0.15  | 0.30±0.20 | 0.35±0.20   | 0.65±0.20 | -          | -           | -         | -         |
|                     |           |           | 0.95±0.10 | 0.20±0.20  | 0.30±0.20 | 0.35±0.20   | 0.65±0.20 | -          | -           | -         | -         |
| B                   | 1.00±0.10 | 0.50±0.10 | 0.37±0.10 | 0.10±0.10  | 0.30±0.10 | 0.20±0.10   | 0.50±0.10 | 0.125±0.10 | -           | -         | -         |
|                     | 1.00±0.10 | 0.50±0.10 | 0.40±0.10 | 0.10±0.10  | 0.30±0.10 | 0.20±0.10   | 0.50±0.10 | 0.125±0.10 | -           | -         | -         |
| C                   | 2.00±0.10 | 1.25±0.15 | 0.90±0.10 | 0.125±0.10 | 0.25±0.10 | 0.25±0.10   | 0.50±0.10 | 0.475±0.10 | 0.30±0.10   | 0.20±0.15 | 0.20±0.15 |
| D                   | 1.60±0.15 | 0.80±0.15 | 0.50±0.10 | 0.175±0.10 | 0.25±0.10 | 0.25±0.10   | 0.50±0.10 | 0.25±0.10  | -           | -         | -         |
| E                   | 0.65±0.10 | 0.50±0.10 | 0.40±0.10 | 0.20±0.05  | 0.20±0.05 | 0.025±0.025 | 0.10±0.05 | 0.25±0.05  | 0.025±0.025 | -         | -         |
| F                   | 1.00±0.10 | 0.50±0.10 | 0.5 max.  | 0.35±0.10  | 0.30±0.10 | 0.15±0.10   | 0.15±0.10 | 0.30±0.10  | -           | -         | -         |

■ ELECTRICAL SPECIFICATION

ISM Band 2.4GHz APPLICATION

| Part Number        | Frequency Range (MHz) | Impedance(Ω) |                                      | Return Loss (dB) Min. | Insertion Loss (dB)         | Amplitude Difference (dB) Max. | Phase Difference | Size(mm)       | Structure |
|--------------------|-----------------------|--------------|--------------------------------------|-----------------------|-----------------------------|--------------------------------|------------------|----------------|-----------|
|                    |                       | Unbalance    | Balance                              |                       |                             |                                |                  |                |           |
| RFBLN1005040A6T    | 2400~2500             | 50           | 50                                   | 10                    | 0.8                         | 2.0                            | 180± 10          | 1.00x0.50x0.40 | B-2       |
| RFBLN1608050AAT    | 2400~2500             | 50           | Conjugate match to AR6003 chipset    | 10                    | 1.2                         | 2.0                            | 180± 10          | 1.60x0.80x0.50 | D         |
| RFBLN1608050AM8T62 | 2400~2500             | 50           | 50                                   | 10                    | 1.2                         | 2.0                            | 180± 10          | 1.60x0.80x0.50 | A-2       |
| RFBLN1608050AM0T63 | 2400~2500             | 50           | 50                                   | 10                    | 1.0                         | 1.0                            | 180± 10          | 1.60x0.80x0.55 | A-2       |
| RFBLN1608050AM6T30 | 2400~2500             | 50           | 35                                   | 10                    | 1.0                         | 1.0                            | 180± 10          | 1.60x0.80x0.55 | A-2       |
| RFBLN1608060AC6T40 | 2400~2500             | 50           | Conjugate match to TI CC26XX Chipset | 10                    | 1.6(25°C)<br>1.8(-40~+85°C) | 2.3                            | 180± 18          | 1.60x0.80x0.60 | A-3       |
| RGBLN1608070A1T    | 2400~2500             | 50           | 100                                  | 10                    | 1.5                         | 2.0                            | 180± 15          | 1.60x0.85x0.70 | A-1       |
| RGBLN1608070A5T    | 2400~2500             | 50           | 100                                  | 10                    | 1.2                         | 2.0                            | 180± 10          | 1.60x0.80x0.70 | A-2       |
| RGBLN2012080A5T    | 2400~2500             | 50           | 50                                   | 12                    | 1.0                         | 1.0                            | 180± 10          | 2.00x1.25x0.85 | A-2       |
| RFBLN2012080A7T    | 2400~2500             | 50           | 100                                  | 10                    | 1.0                         | 2.0                            | 180± 10          | 2.00x1.25x0.80 | A-2       |
| RGBLN2012090A0T    | 2400~2500             | 50           | 50                                   | 10                    | 1.2                         | 2.0                            | 180± 10          | 2.00x1.25x0.95 | A-2       |
| RFBLN2012090A1T    | 2400~2500             | 50           | 100                                  | 10                    | 1.0                         | 2.0                            | 180± 10          | 2.00x1.25x0.95 | A-2       |

ISM Band 5GHz APPLICATION

| Part Number     | Frequency Range (MHz) | Impedance(Ω) |         | Return Loss (dB) Min | Insertion Loss (dB)           | Amplitude Difference (dB) Max. | Phase Difference | Size (mm)      | Structure |
|-----------------|-----------------------|--------------|---------|----------------------|-------------------------------|--------------------------------|------------------|----------------|-----------|
|                 |                       | Unbalance    | Balance |                      |                               |                                |                  |                |           |
| RFBLN1005040K1T | 4900~5950             | 50           | 50      | 10                   | 1.2                           | 2.0                            | 180± 10          | 1.00x0.50x0.40 | B-2       |
| RFBLN1005040K5T | 4900~5950             | 50           | 100     | 10                   | 0.55(25°C)<br>0.75(-40~+85°C) | 2.5                            | 180± 10          | 1.00x0.50x0.40 | B-2       |
| RFBLN1005040K6T | 4900~5950             | 50           | 50      | 10                   | 0.60(25°C)<br>0.80(-40~+85°C) | 2.5                            | 180± 15          | 1.00x0.50x0.40 | B-2       |
| RFBLN2012090K1T | 4900~5900             | 50           | 100     | 10                   | 1.2                           | 2.0                            | 180± 10          | 2.00x1.25x0.95 | A-4       |

LTE Band APPLICATION



| Part Number        | Frequency Range (MHz)  | Impedance(Ω) |         | Return Loss (dB)Min | Insertion Loss (dB)           | Amplitude Difference (dB) Max. | Phase Difference | Size (mm)      | Structure |
|--------------------|------------------------|--------------|---------|---------------------|-------------------------------|--------------------------------|------------------|----------------|-----------|
|                    |                        | Unbalance    | Balance |                     |                               |                                |                  |                |           |
| RFBLN0605040Y1T    | 717~821                | 50           | 100     | 15                  | 0.55(25°C)<br>0.65(-40~+85°C) | 2.0                            | 180± 10          | 0.65x0.50x0.40 | E         |
| RFBLN0605040YM9T16 | 729~821                | 50           | 100     | 10                  | 0.55(25°C)<br>0.65(-40~+85°C) | 2.0                            | 180± 10          | 0.65x0.50x0.40 | E         |
| RFBLN1005040YM1T69 | 703~803                | 50           | 100     | 10                  | 0.8                           | 2.0                            | 180± 12          | 1.00x0.50x0.40 | F         |
| RFBLN06050G9D0T    | 729~960                | 50           | 100     | 15                  | 0.85(25°C)<br>0.95(-40~+85°C) | 4.8                            | 180± 10          | 0.65x0.50x0.40 | E         |
| RFBLN16080G9D2T    | 699~960                | 50           | 100     | 10                  | 1.05(25°C)<br>1.15(-40~+85°C) | 2.5                            | 180± 15          | 1.60x0.80x0.70 | A-4       |
| RFBLN16080G9D3T    | 824~894                | 50           | 50      | 10                  | 1.2                           | 1.0                            | 180± 10          | 1.60x0.80x0.60 | A-2       |
| RFBLN20120G9D0T    | 824~894                | 50           | 100     | 10                  | 1.2                           | 1.0                            | 180± 10          | 2.00x1.25x0.90 | A-2       |
| RFBLN20120G9D5T    | 880~960                | 50           | 100     | 10                  | 1.1                           | 1.0                            | 180± 10          | 2.00x1.25x0.90 | A-2       |
| RFBLN20120G9D8T    | 800~1000               | 50           | 50      | 10                  | 1.2                           | 2.0                            | 180± 10          | 2.00x1.25x0.90 | A-2       |
| RFBLN06051G8DM1T69 | 1805~1990              | 50           | 100     | 10                  | 0.60(25°C)<br>0.65(-40~+85°C) | 1.8                            | 180± 10          | 0.65x0.50x0.40 | E         |
| RFBLN06051G8D1T    | 1805~2170              | 50           | 100     | 10                  | 0.65(25°C)<br>0.70(-40~+85°C) | 3.0                            | 180± 15          | 0.65x0.50x0.40 | E         |
| RFBLN20121G8D1T    | 1700~2000              | 50           | 100     | 10                  | 1.0                           | 2.0                            | 180± 10          | 2.00x1.25x0.95 | A-2       |
| RFBLN10051G9D0T    | 1805~2020              | 50           | 100     | 10                  | 0.65(25°C)<br>0.75(-40~+85°C) | 2.0                            | 180± 10          | 1.00x0.50x0.40 | B-2       |
| RFBLN10051G9D1T    | 1805~1990              | 50           | 100     | 10                  | 0.60(25°C)<br>0.70(-40~+85°C) | 2.2                            | 180± 12          | 1.00x0.50x0.40 | B-2       |
| RFBLN1005040F0T    | 1805~2170              | 50           | 100     | 10                  | 0.70(25°C)<br>0.80(-40~+85°C) | 1.2                            | 180± 15          | 1.00x0.50x0.40 | F         |
| RFBLN1608070F48Q1C | 673~2700               | 50           | 100     | 10                  | 1.7(25°C)<br>2.0(-40~+85°C)   | 1.5                            | 180± 17          | 1.60x0.80x0.70 | A-4       |
| RFBLN1608060FET    | 1710~2200              | 50           | 50      | 10                  | 1.20(25°C)<br>1.40(-40~+85°C) | 2.0                            | 180± 10          | 1.60x0.80x0.60 | A-2       |
| RFBLN2012090F0T    | 1920~1980<br>2110~2170 | 50           | 50      | 10                  | 1.0                           | 2.0                            | 180± 10          | 2.00x1.25x0.95 | A-2       |
| RFBLN0605040E0T    | 2000~2500              | 50           | 100     | 10                  | 0.60(25°C)<br>0.70(-40~+85°C) | 3.5                            | 180± 10          | 0.65x0.50x0.40 | E         |
| RFBLN2012090E0T    | 1500~3000              | 50           | 100     | 10                  | 1.0                           | 2.0                            | 180± 10          | 2.00x1.25x0.90 | A-4       |
| RFBLN06052G5W9T16  | 2300~2690              | 50           | 100     | 10                  | 0.55(25°C)<br>0.65(-40~+85°C) | 2.5                            | 180± 10          | 0.65x0.50x0.40 | E         |
| RFBLN10052G5W9T16  | 2300~2690              | 50           | 100     | 10                  | 0.55(25°C)<br>0.65(-40~+85°C) | 2.5                            | 180± 10          | 1.00x0.50x0.40 | B-1       |
| RFBLN10052G5W37N2T | 2300~2690              | 50           | 100     | 10                  | 0.65(25°C)<br>0.75(-40~+85°C) | 2.5                            | 180± 10          | 1.00x0.50x0.40 | B-2       |
| RFBLN16082G5W0T    | 2300~2700              | 50           | 100     | 10                  | 1.1                           | 2.0                            | 180± 10          | 1.60x0.80x0.70 | A-2       |
| RFBLN16082G5W38Q1C | 2300~2700              | 50           | 100     | 10                  | 0.55(25°C)<br>0.65(-40~+85°C) | 1.0                            | 180± 10          | 1.60x0.80x0.40 | A-4       |
| RFBLN16082G5W4T    | 2300~2700              | 50           | 50      | 10                  | 1.2                           | 2.0                            | 180± 10          | 1.60x0.80x0.50 | A-2       |

GSM 850/ GSM 900/ DCS1800/ PCS1900 APPLICATION



| Part Number        | Frequency Range (MHz) | Unbalance | Balance | Return Loss (dB) Min | Insertion Loss (dB)         | Amplitude Difference (dB) Max | Attenuation (dB min.)                                    | Phase Difference | Size(mm)       | Structure |
|--------------------|-----------------------|-----------|---------|----------------------|-----------------------------|-------------------------------|--|------------------|----------------|-----------|
| RFBLN2012090BM5T25 | 869~960               | 50        | 200     | 10                   | 1.1                         | 2.0                           | 10(1738~1920MHz)<br>20(2400~2500MHz)<br>20(2607~2880MHz) | 180± 10          | 2.00x1.25x0.95 | C-1       |
|                    | 1805~2025             | 50        | 200     | 10                   | 1.8                         | 2.0                           | 15(2400~2500MHz)<br>20(3610~3980MHz)<br>20(5415~5970MHz) | 180± 15          |                |           |
| RFBLN2012090BS0T53 | 869~960               | 50        | 200     | 10                   | 1.1(25°C)<br>1.3(-40~+85°C) | 2.0                           | 10(1738~1920MHz)<br>20(2400~2500MHz)<br>20(2607~2880MHz) | 180± 15          | 2.00x1.25x0.95 | C-1       |
|                    | 1805~1990             | 50        | 200     | 10                   | 1.6(25°C)<br>1.8(-40~+85°C) | 2.0                           | 15(2400~2500MHz)<br>15(3610~3980MHz)<br>20(5415~5970MHz) | 180± 15          |                |           |
| RFBLN2012090BS0T50 | 869~960               | 50        | 200     | 10                   | 1.1(25°C)<br>1.3(-40~+85°C) | 2.0                           | 10(1738~1920MHz)<br>20(2400~2500MHz)<br>20(2607~2880MHz) | 180± 15          | 2.00x1.25x0.95 | C-2       |
|                    | 1805~2025             | 50        | 200     | 10                   | 1.8(25°C)<br>2.0(-40~+85°C) | 2.0                           | 15(2400~2500MHz)<br>15(3610~3980MHz)<br>20(5415~5970MHz) | 180± 15          |                |           |

■ TYPICAL ELECTRICAL CHARACTERISTICS



RFBLN1005040A6T

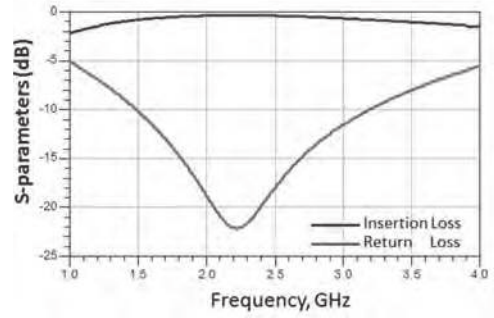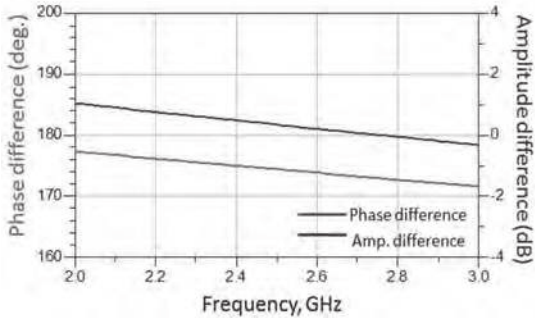



RFBLN1608050AAT

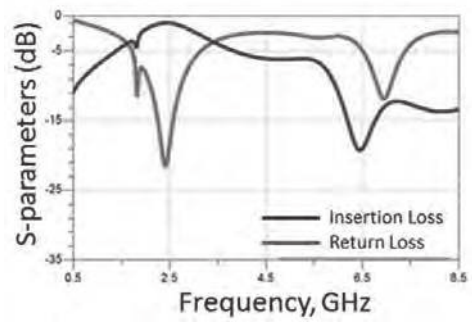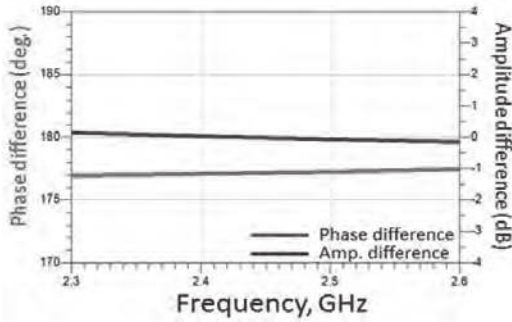



RFBLN1608050AM8T62

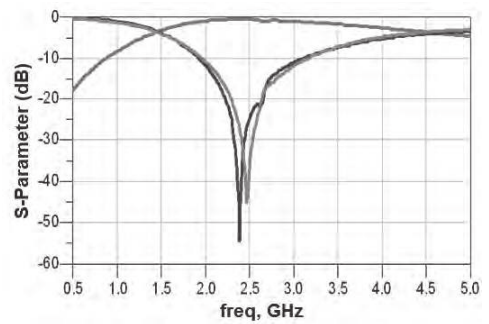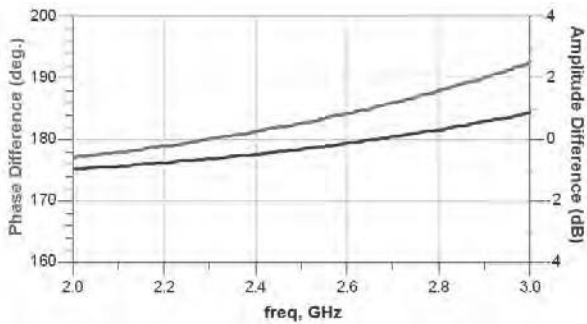

RFBLN1608050AM0T63

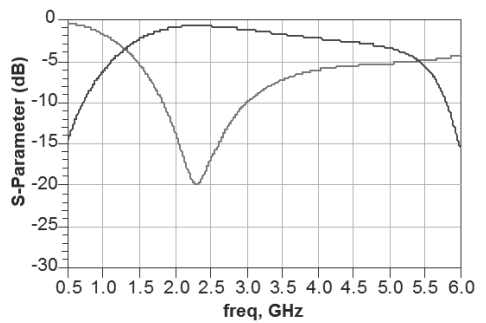
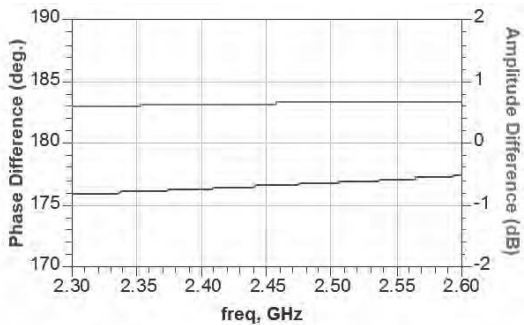


RFBLN2012080A7T

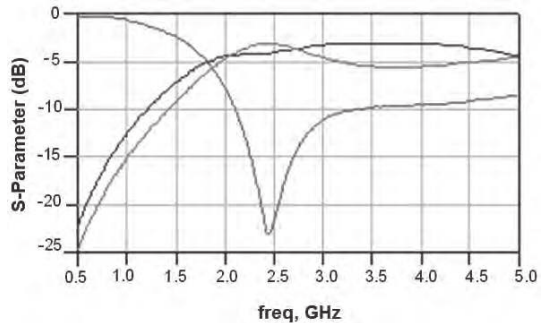
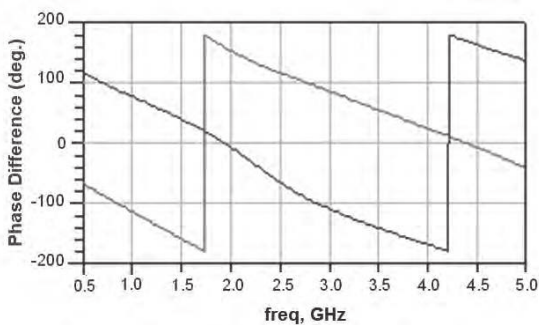


TYPICAL ELECTRICAL CHARACTERISTICS



RGBLN2012090A0T

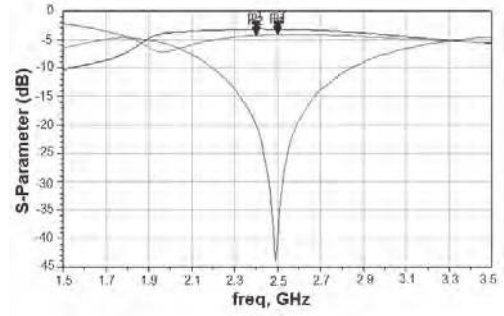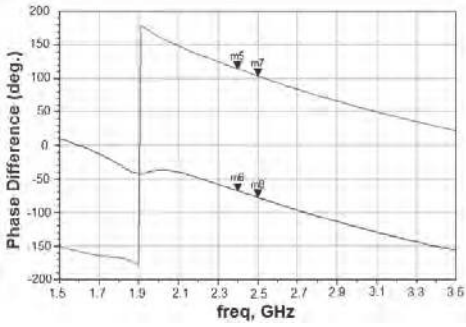



RFBLN1005040K1T

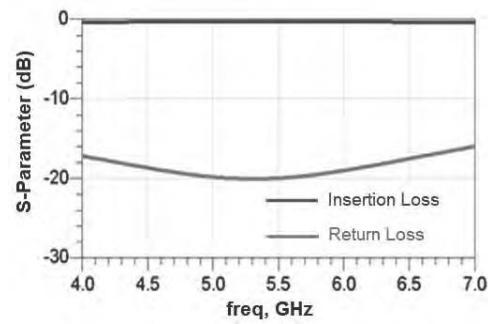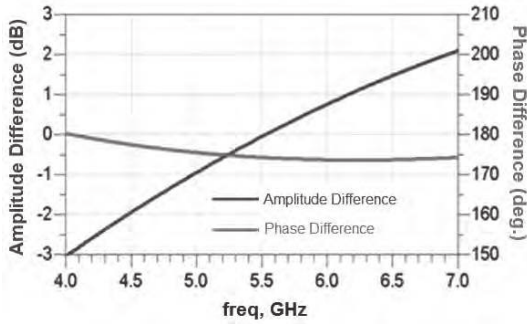



RFBLN1005040K5T

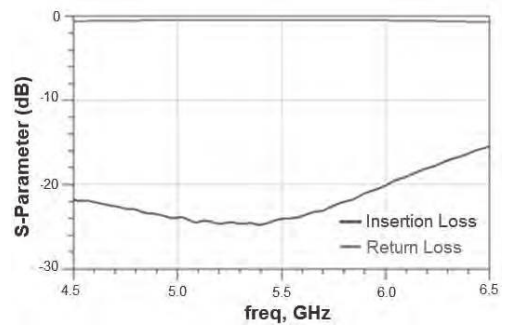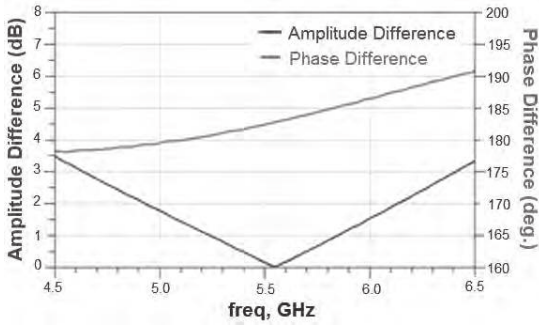

RFBLN0605040Y1T

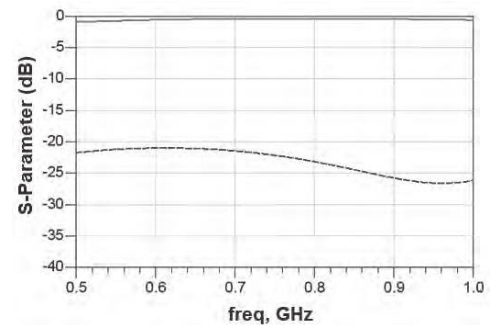
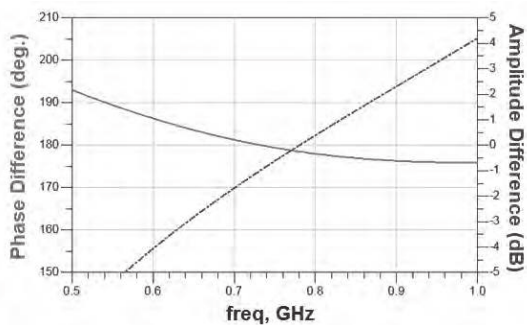


RFBLN0605040YM9T16

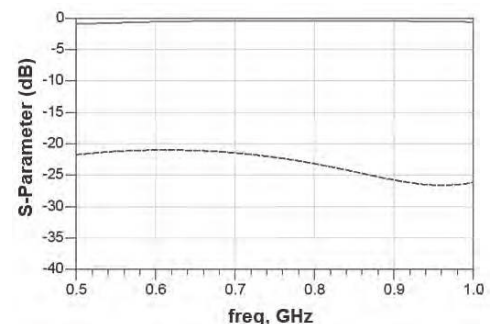
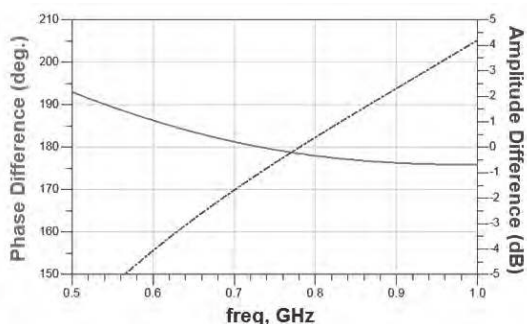


TYPICAL ELECTRICAL CHARACTERISTICS



RFBLN1005040YM1T69

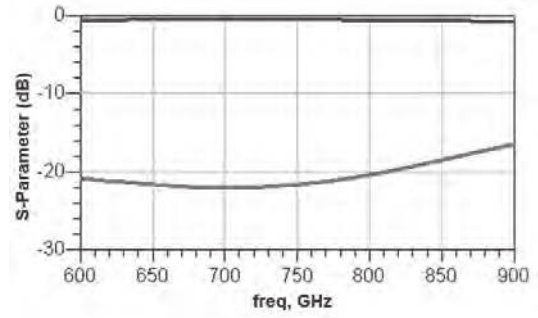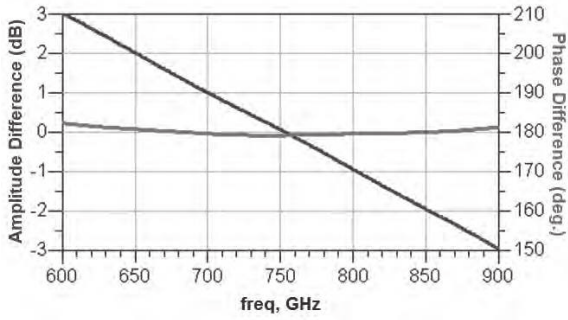



RFBLN06050G9D0T

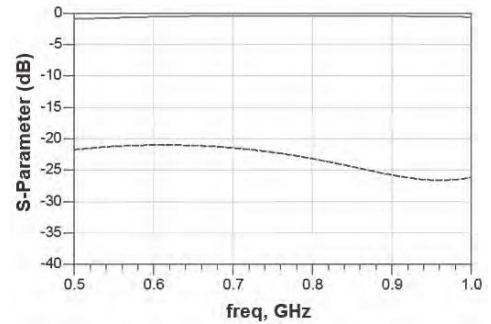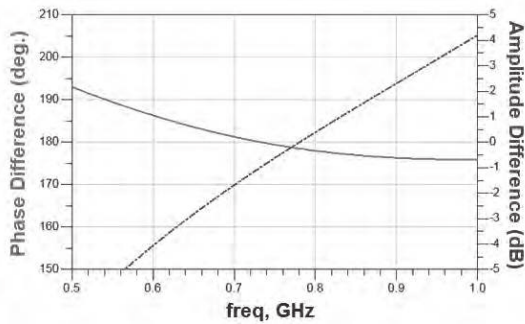



RFBLN16080G9D2T

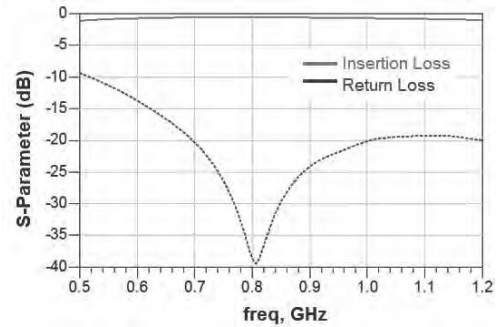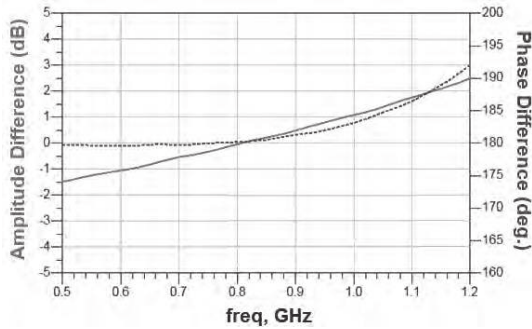

RFBLN16080G9D3T

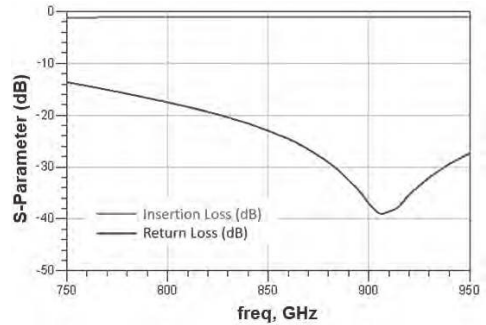
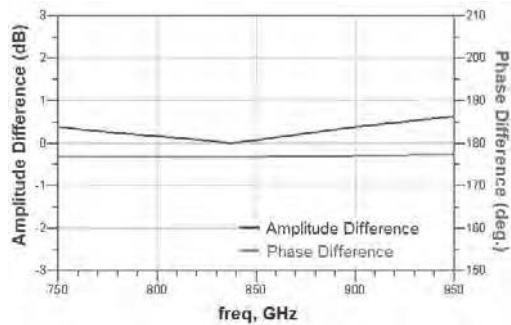


RFBLN20120G9D0T

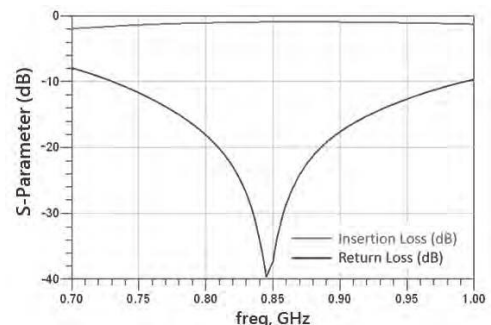
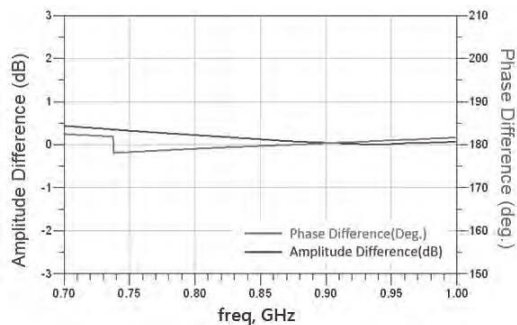


TYPICAL ELECTRICAL CHARACTERISTICS



RFBLN20120G9D5T

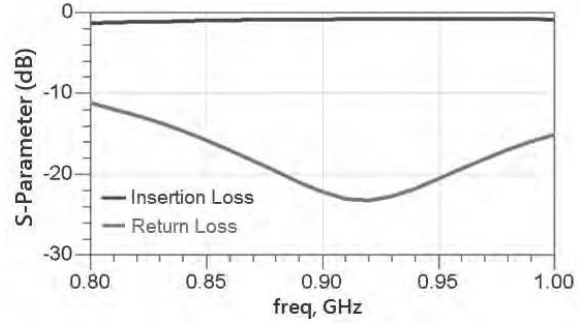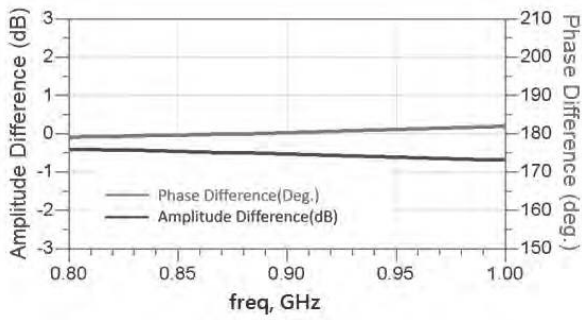



RFBLN20120G9D8T

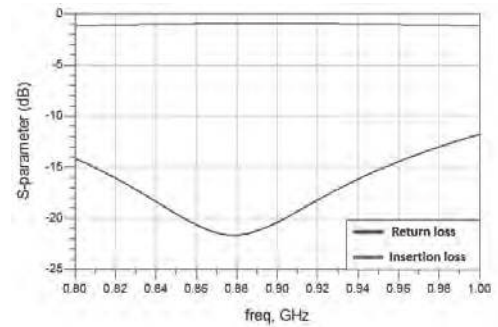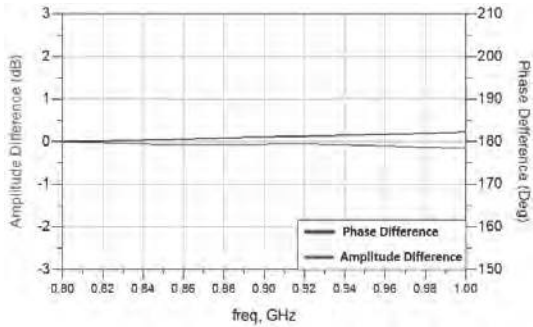



RFBLN06051G8DM1T69

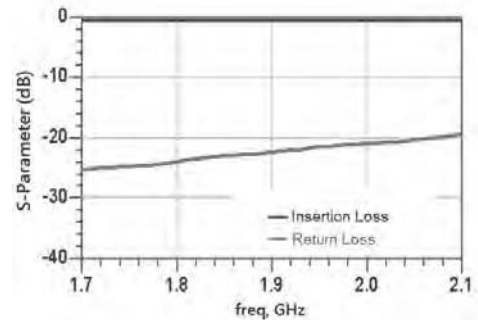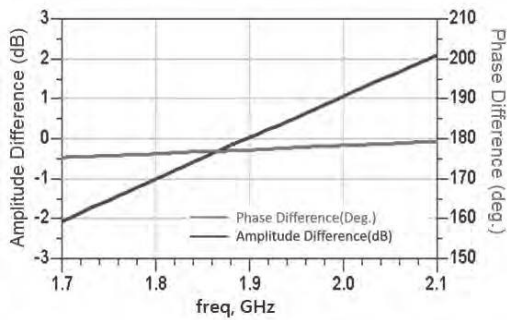

RFBLN06051G8D1T

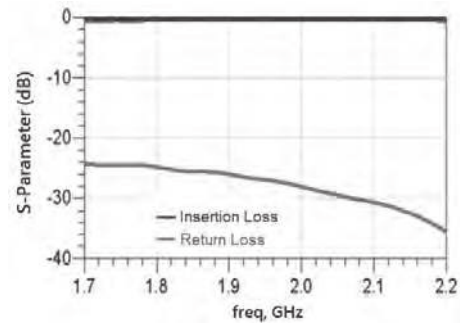
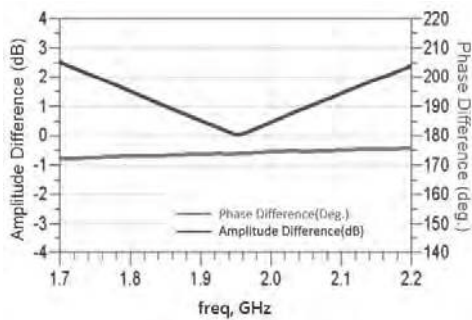


RFBLN20121G8D1T

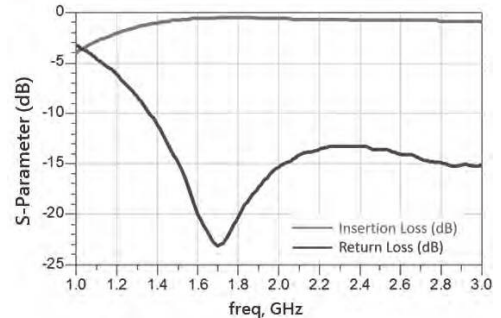
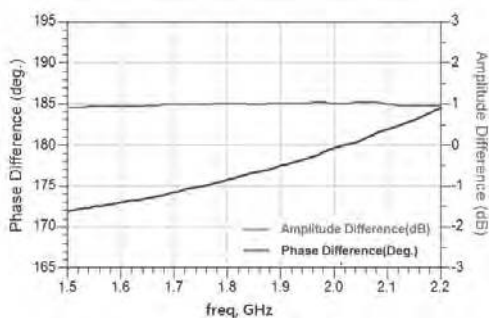


TYPICAL ELECTRICAL CHARACTERISTICS



RFBLN10051G9D0T

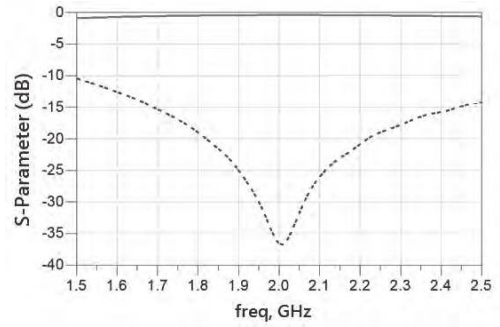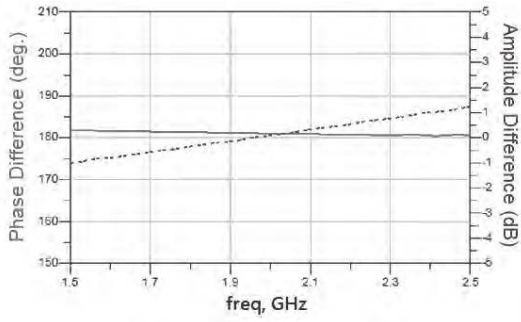



RFBLN10051G9D1T

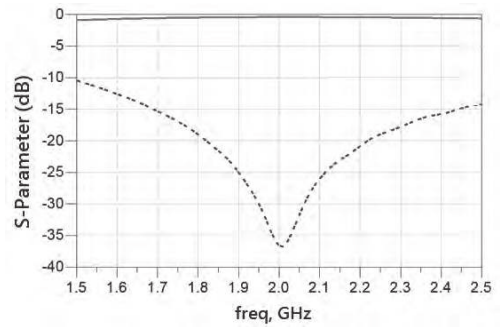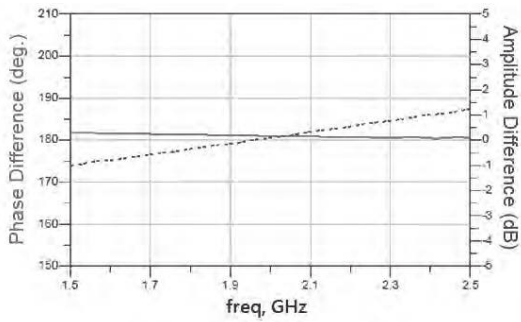



RFBLN1005040F0T

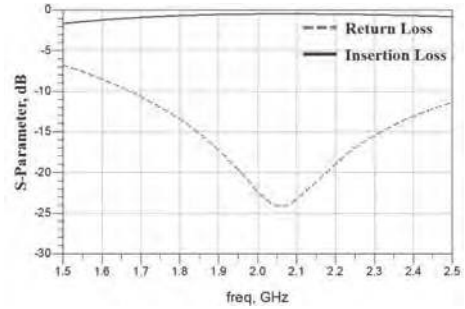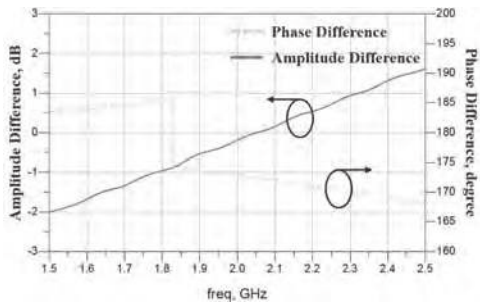

RFBLN1608070F48Q1C

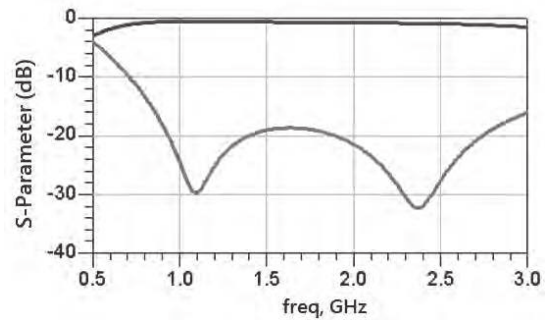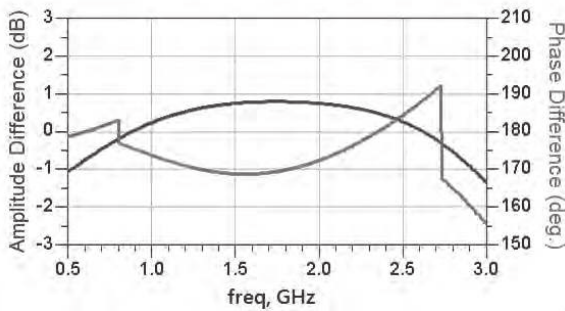


RFBLN2012090F0T

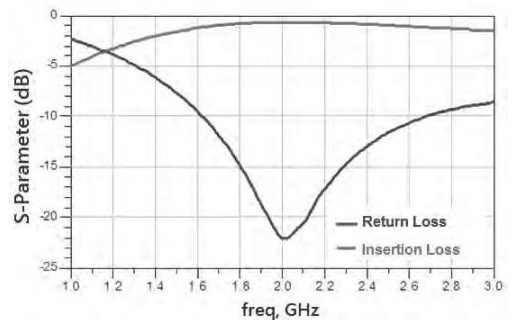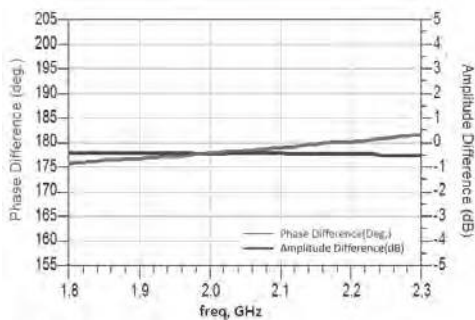





TYPICAL ELECTRICAL CHARACTERISTICS



RFBLN0605040E0T

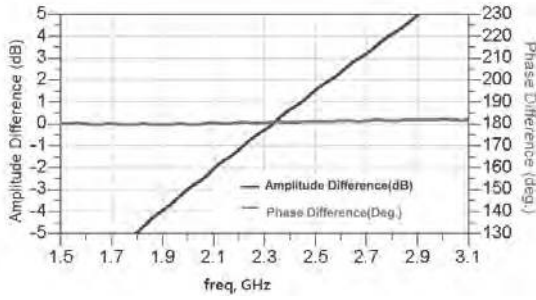



RFBLN2012090E0T

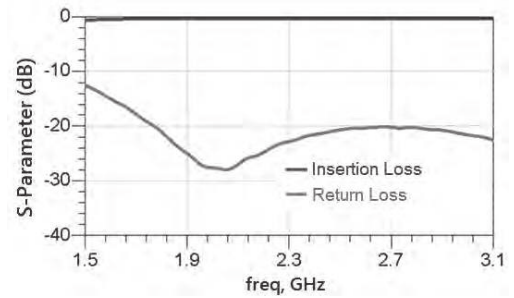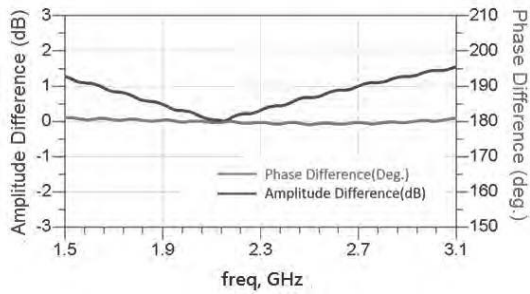



RFBLN06052G5WM9T16

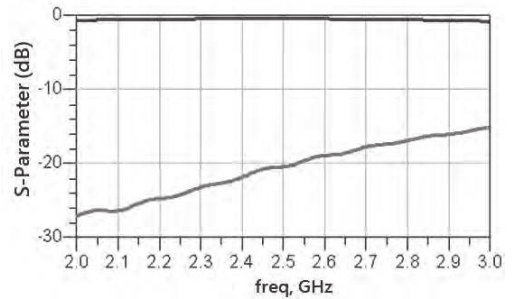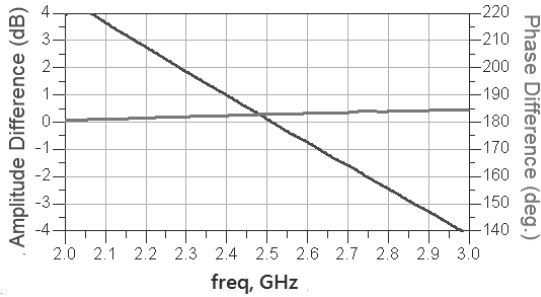


RFBLN10052G5WM9T16

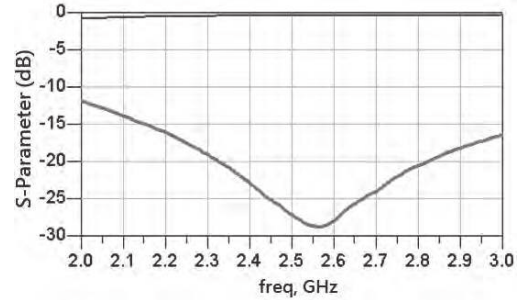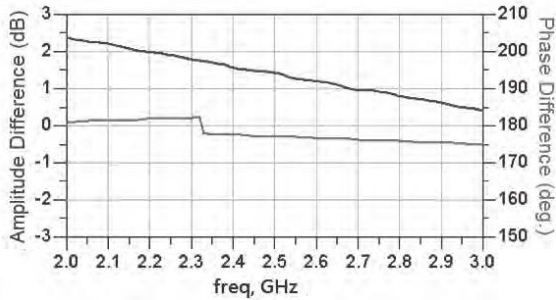

RFBLN10052G5W37N2T

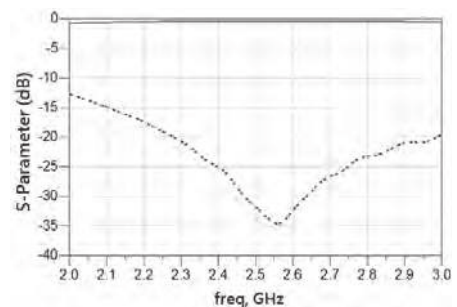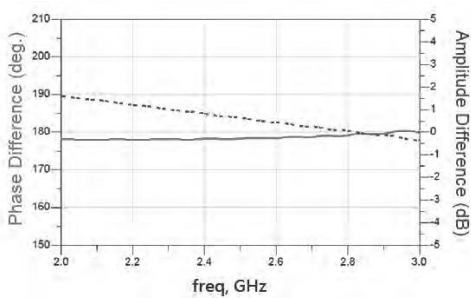

TYPICAL ELECTRICAL CHARACTERISTICS

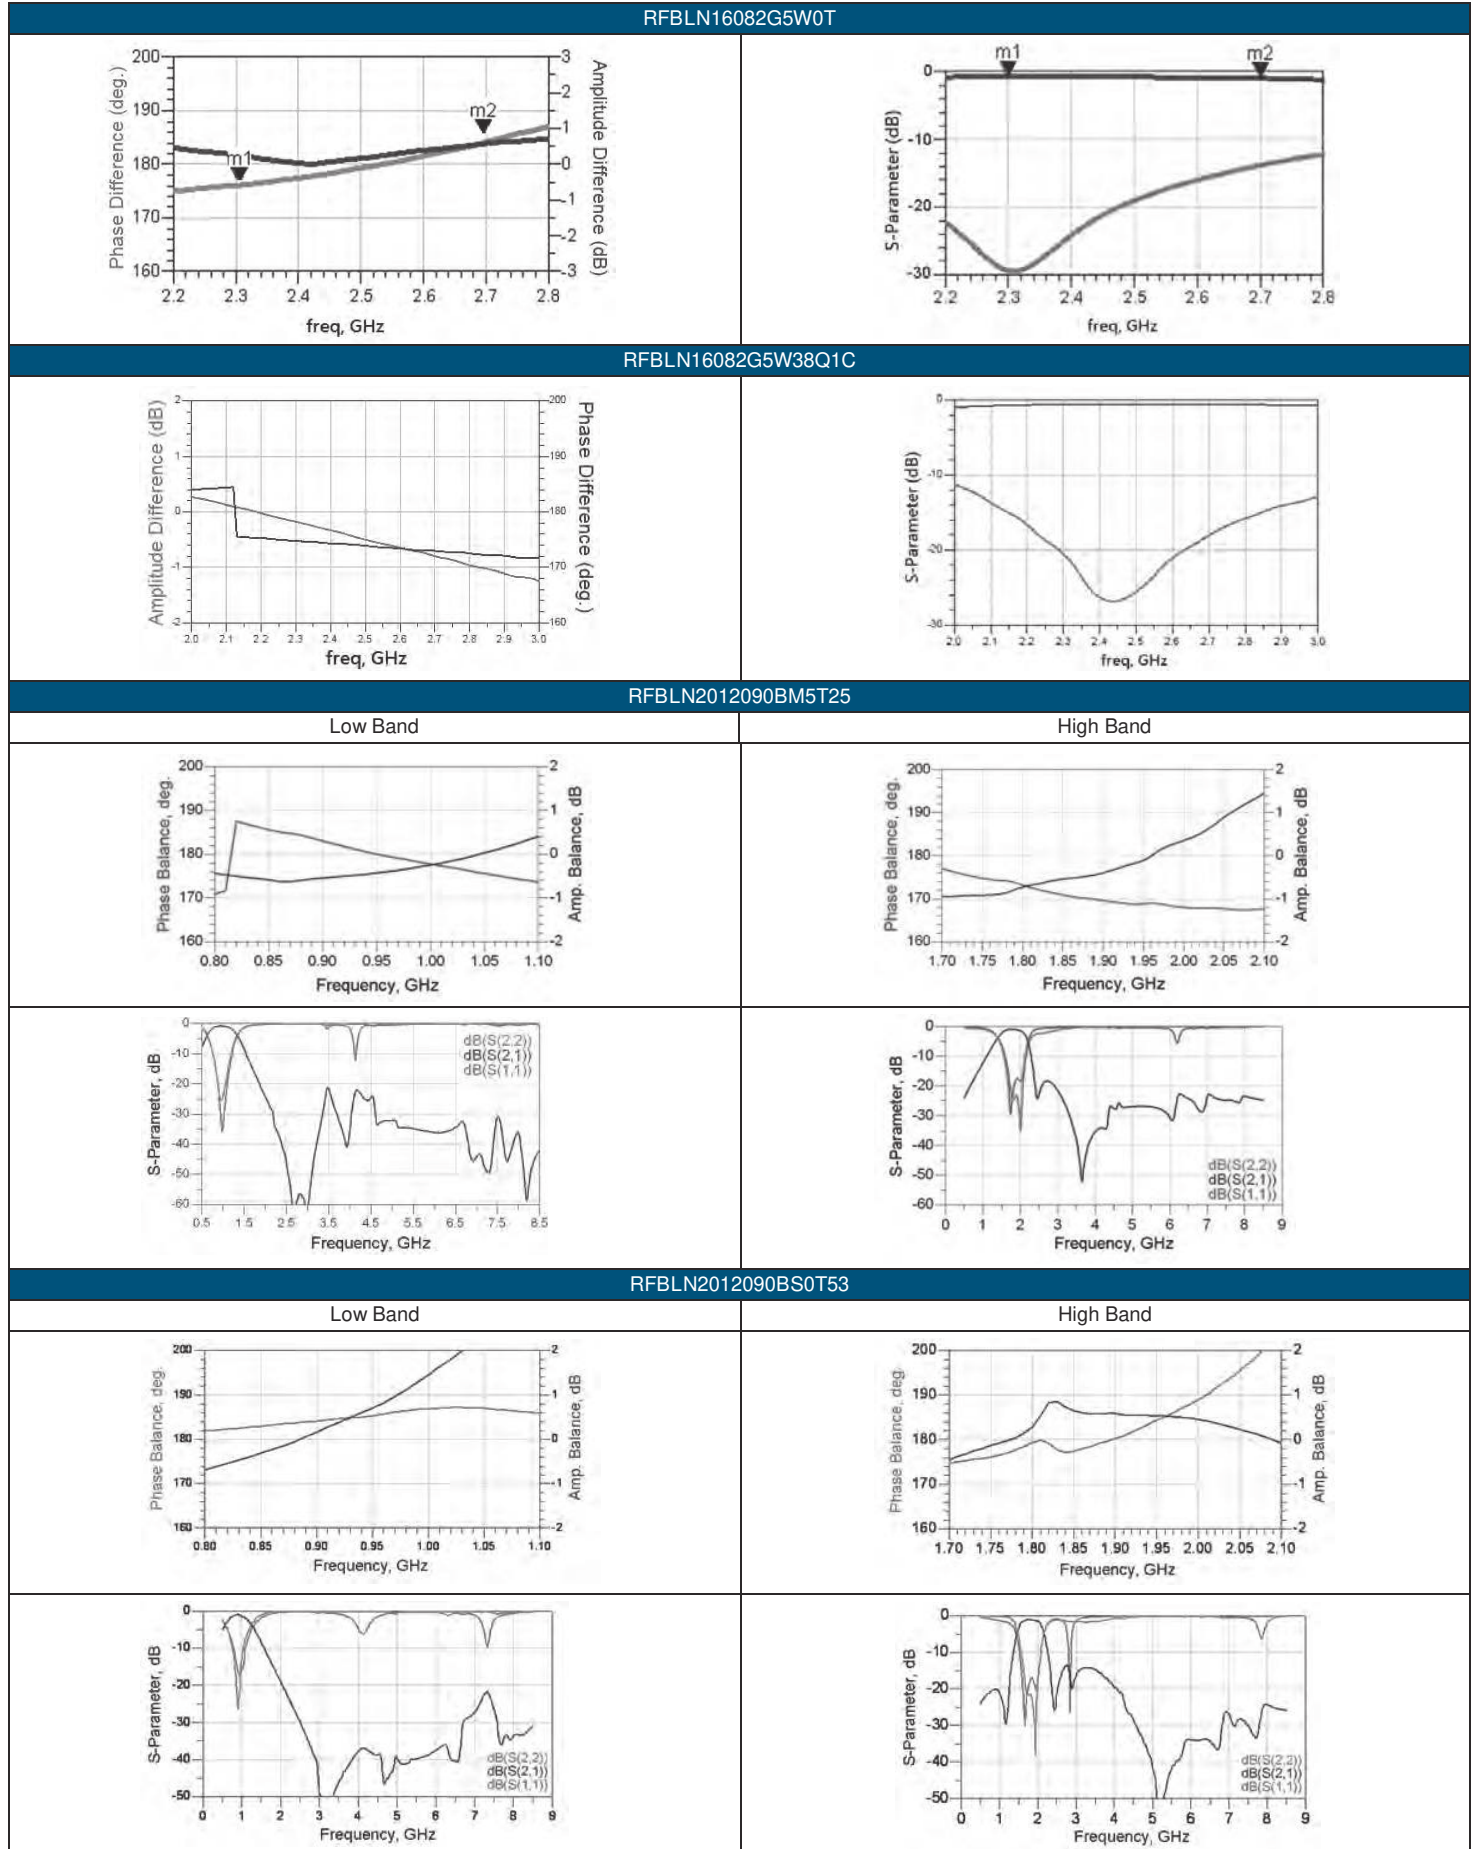

- For more information, please contact with local sales representative
- All specifications are subject to change without notice

DIPLEXER

■ STRUCTURE AND PIN ASSOCIATED

| STRUCTURE A   |                      |                      |                      |                      |
|---------------|----------------------|----------------------|----------------------|----------------------|
|               | <p>STRUCTURE A-1</p> | <p>STRUCTURE A-2</p> | <p>STRUCTURE A-3</p> | <p>STRUCTURE A-4</p> |
| STRUCTURE B   | STRUCTURE C          | STRUCTURE D          | STRUCTURE E          |                      |
|               |                      |                      |                      |                      |
| STRUCTURE B-1 | STRUCTURE C-1        | STRUCTURE D-1        | STRUCTURE E-1        |                      |
|               |                      |                      |                      |                      |
| STRUCTURE B-2 | STRUCTURE C-2        | STRUCTURE D-2        | STRUCTURE E-2        |                      |
|               |                      |                      |                      |                      |
| STRUCTURE F   | STRUCTURE G          | STRUCTURE H          |                      |                      |
|               |                      |                      |                      |                      |
|               |                      |                      |                      |                      |

■ STRUCTURE AND DIMENSION

Unit: mm

| Structure\ Dimension | L         | W         | T         | A          | B         | C         | D         | E          | F         |
|----------------------|-----------|-----------|-----------|------------|-----------|-----------|-----------|------------|-----------|
| A                    | 1.60±0.15 | 0.80±0.15 | 0.60±0.10 | 0.175±0.15 | 0.25±0.15 | 0.25±0.15 | 0.50±0.15 | 0.20±0.15  | -         |
|                      | 2.00±0.10 | 1.25±0.20 | 0.55±0.15 | 0.20±0.15  | 0.30±0.15 | 0.35±0.15 | 0.65±0.15 | 0.20±0.10  | -         |
|                      | 2.00±0.15 | 1.25±0.15 | 0.95±0.10 | 0.20±0.20  | 0.30±0.20 | 0.35±0.20 | 0.65±0.20 | -          | -         |
| B                    | 1.60±0.15 | 0.80±0.15 | 0.60±0.10 | 0.65±0.15  | 0.30±0.15 | 0.20±0.15 | 0.20±0.15 | 0.25±0.15  | 0.30±0.15 |
| C                    | 2.00±0.15 | 1.25±0.15 | 0.70±0.10 | 0.35±0.10  | 0.30±0.10 | 0.65±0.10 | 0.60±0.10 | 0.275±0.10 | -         |
|                      |           |           | 0.90±0.10 | 0.35±0.10  | 0.30±0.10 | 0.65±0.10 | 0.60±0.10 | 0.275±0.10 | -         |
|                      | 2.50±0.15 | 2.00±0.15 | 0.80±0.15 | 0.30±0.15  | 0.35±0.15 | 0.65±0.15 | 0.75±0.15 | 0.525±0.15 | -         |
| D                    | 1.60±0.15 | 0.80±0.15 | 0.60±0.10 | 0.175±0.15 | 0.25±0.15 | 0.25±0.15 | 0.50±0.15 | 0.20±0.15  | -         |
| E                    | 2.50±0.15 | 2.00±0.15 | 0.70±0.10 | 0.30±0.10  | 0.40±0.10 | 0.60±0.10 | 1.10±0.10 | -          | -         |
| F                    | 2.50±0.15 | 2.00±0.15 | 1.0max.   | 0.375±0.15 | 0.25±0.15 | 0.25±0.15 | 0.50±0.15 | 0.20±0.15  | -         |
| G                    | 1.60±0.15 | 0.80±0.15 | 0.60±0.10 | 0.65±0.15  | 0.30±0.15 | 0.20±0.15 | 0.20±0.15 | 0.25±0.15  | 0.30±0.15 |
| H                    | 1.00±0.10 | 0.50±0.10 | 0.40max.  | 0.10±0.10  | 0.30±0.10 | 0.20±0.10 | 0.50±0.10 | 0.125±0.10 | -         |

■ ELECTRICAL SPECIFICATION

ISM Band 2.4GHz/5GHz APPLICATION

| Part Number        | Frequency (MHz) | Impedance (Ω) | Insertion Loss (dB)           | Attenuation (dB)  | Return Loss (dB) Min | Isolation                            | Size (mm)      | Structure |
|--------------------|-----------------|---------------|-------------------------------|---|----------------------|--------------------------------------|----------------|-----------|
| RFDIP1004L10AT     | 2400~2500       | 50            | 0.5(25°C)<br>0.6(-40~+85°C)   | 25(4800~6000MHz)<br>25(7200~7500MHz)  | 10                   | -                                    | 1.00x0.50x0.40 | H         |
|                    | 4900~5900       | 50            | 0.8(25°C)<br>1.3(-40~+85°C)   | 27(30~2400MHz)<br>30(2400~2500MHz)<br>24(2500~2690MHz)<br>20(9800~11900MHz)   |                      |                                      |                |           |
| RFDIP1608060LCT    | 2400~2500       | 50            | 0.6                           | 20(4800~5000MHz)<br>20(7200~7500MHz)  | 10                   | 28(30~2700 MHz)<br>26(4900~5950 MHz) | 1.60x0.80x0.60 | A-4       |
|                    | 4900~5900       | 50            | 1.4                           | 28(30~2700MHz)<br>10(9800~11900MHz)   |                      |                                      |                |           |
| RFDIP1608060LET    | 2400~2500       | 50            | 0.6                           | 18(4800~5000MHz)<br>18(7200~7500MHz)  | 10                   | -                                    | 1.60x0.80x0.60 | A-1       |
|                    | 4900~5900       | 50            | 1.4                           | 20(3700~3900MHz)<br>20(1800~2500MHz)<br>10(9800~11800MHz)   |                      |                                      |                |           |
| RFDIP1608060LFT    | 2400~2500       | 50            | 0.6                           | 18(4800~5000MHz)<br>18(7200~7500MHz)  | 10                   | -                                    | 1.60x0.80x0.60 | A-2       |
|                    | 4900~5900       | 50            | 1.4                           | 20(3700~3900MHz)<br>20(1800~2500MHz)<br>10(9800~11800MHz)   |                      |                                      |                |           |
| RFDIP160806BLM6T25 | 2400~2500       | 50            | 0.5                           | 10(3600~3750MHz)<br>20(4800~5000MHz)<br>20(5000~5950MHz)<br>10(7200~7500MHz)<br>10(9600~10000MHz)                                   | 10                   | -                                    | 1.60x0.80x0.60 | A-1       |
|                    | 4900~5950       | 50            | 0.6                           | 25(860~960MHz)<br>25(1545~1605MHz)<br>25(1710~1990MHz)<br>30(2170 MHz)<br>10(8100~8800MHz)<br>15(8820~9800MHz)<br>25(9800~11900MHz) |                      |                                      |                |           |
| RFDIP160806ALM6T30 | 2400~2500       | 50            | 0.5                           | 10(3600~3750MHz)<br>20(4800~5000MHz)<br>20(5000~5950MHz)<br>10(7200~7500MHz)<br>10(9600~10000MHz)                                   | 10                   | -                                    | 1.60x0.80x0.60 | A-2       |
|                    | 4900~5950       | 50            | 0.6                           | 25(860~960MHz)<br>25(1545~1605MHz)<br>25(1710~1990MHz)<br>30(2170MHz)<br>10(8100~8800MHz)<br>15(8820~9800MHz)<br>25(9800~11900MHz)  |                      |                                      |                |           |
| RFDIP1608060LM0T60 | 2400~2500       | 50            | 0.75(25°C)<br>0.95(-40~+85°C) | 20(4800~5000MHz)<br>20(7200~7500MHz)  | 10                   | -                                    | 1.60x0.80x0.60 | A-2       |
|                    | 4900~5950       | 50            | 1.0(25°C)<br>1.3(-40~+85°C)   | 20(1800~2500MHz)<br>20(9800~11800MHz)   |                      |                                      |                |           |

ISM Band 2.4/5GHz Application

| Part Number        | Frequency (MHz) | Impedance (Ω) | Insertion Loss (dB)           | Attenuation (dB)   | Return Loss (dB) Min | Isolation                             | Size (mm)      | Structure |
|--------------------|-----------------|---------------|-------------------------------|--|----------------------|---------------------------------------|----------------|-----------|
| RFDIP160806BLM6T68 | 2400~2500       | 50            | 0.50(25°C)<br>0.65(-40~+85°C) | 21(4800~5000MHz)<br>21(5000~5950MHz)<br>25(7200~7500MHz)   | 10                   | 32(2400~2500MHz)<br>25(4900~6000MHz)  | 10             | A-2       |
|                    | 4900~5950       | 50            | 0.60(25°C)<br>0.75(-40~+85°C) | 27(824~2170MHz)<br>30(2400~2500MHz)<br>20(9800~11900MHz)   |                      |                                       |                |           |
| RFDIP1608060LVT    | 2400~2500       | 50            | 0.6                           | -  | 10                   | 32 (30~2700 MHz)<br>28(4900~5950 MHz) | 1.60x0.80x0.60 | A-4       |
|                    | 4900~5950       | 50            | 0.8                           | 32(30~2700MHz)<br>15(9800~11900MHz)<br>11(14700~17850MHz)  |                      |                                       |                |           |
| RFDIP1608060LST    | 2400~2500       | 50            | 0.5(25°C)<br>0.6(-40~+85°C)   | 22(4800~5000MHz)<br>24(7200~7500MHz)   | 10                   | -                                     | 1.60x0.80x0.60 | G         |
|                    | 5100~5900       | 50            | 1.1(25°C)<br>1.3(-40~+85°C)   | 25(1800~2500MHz)<br>24(3700~3900MHz)<br>22(9800~11900MHz)  |                      |                                       |                |           |
| RFDIP1608060LY8Q1C | 2400~2496       | 50            | 0.5                           | 35(4800~5000MHz)<br>15(7200~7500MHz)   | 12                   | -                                     | 1.60x0.80x0.60 | A-3       |
|                    | 5150~5950       | 50            | 1.0                           | 30(70~2000MHz)<br>30(2400~2690MHz)<br>12(7250~7800MHz)<br>25(10300~12000MHz)<br>10(15000~18000MHz)   |                      |                                       |                |           |
| RFDIP1606L168M1U   | 2400~2500       | 50            | 0.55(25°C)<br>0.60(-40~+85°C) | 29(4800~5000MHz)<br>24(7200~7500MHz)   | 10                   | 32(30~2700MHz)<br>28(4900~5950 MHz)   | 1.60x0.80x0.60 | A-3       |
|                    | 4900~5950       | 50            | 0.70(25°C)<br>0.80(-40~+85°C) | 32(30~2700MHz)<br>15(9800~11900MHz)<br>11(14700~17850MHz)  |                      |                                       |                |           |
| RFDIP1606L23T      | 2400~2500       | 50            | 0.6                           | 23(4800~5000MHz)<br>30(7200~7500MHz)   | 10                   | -                                     | 1.60x0.80x0.60 | A-3       |
|                    | 5150~5850       | 50            | 1.5                           | 25(2400~2500MHz)<br>15(3400~3600MHz)<br>10(3600~3900MHz)<br>20(6900~7550MHz)<br>30(10600~11700MHz)<br>20(15300~16200MHz)                               |                      |                                       |                |           |
| RFDIP1606L24T      | 2400~2500       | 50            | 0.5                           | 23(4800~5000MHz)<br>30(7200~7500MHz)   | 10                   | -                                     | 1.60x0.80x0.60 | A-4       |
|                    | 5150~5850       | 50            | 0.6                           | 25(2400~2500MHz)<br>15(3400~3600MHz)<br>10(3600~3900MHz)<br>20(6900~7550MHz)<br>30(10600~11700MHz)<br>20(15300~16200MHz)                               |                      |                                       |                |           |
| RFDIP1606L29T      | 2400~2500       | 50            | 0.75(25°C)<br>0.95(-40~+85°C) | 25(4800~5000MHz)<br>20(7200~7500MHz)   | 10                   | -                                     | 1.60x0.80x0.60 | A-2       |
|                    | 4900~5950       | 50            | 1.10(25°C)<br>1.30(-40~+85°C) | 20(1800~2500MHz)<br>15(9800~11900MHz)  |                      |                                       |                |           |
| RFDIP1606L51T      | 2400~2500       | 50            | 0.35(25°C)<br>0.45(-40~+85°C) | 20(4800~5000MHz)<br>22(5000~5950MHz)<br>20(7200~7500MHz)   | 10                   | -                                     | 1.60x0.80x0.60 | B-2       |
|                    | 4900~5850       | 50            | 0.50(25°C)<br>0.60(-40~+85°C) | 26(824~2170MHz)<br>30(2400~2500MHz)<br>25(9500~11900MHz)   |                      |                                       |                |           |
| RFDIP1606L52T      | 2400~2500       | 50            | 0.40(25°C)<br>0.45(-40~+85°C) | 21(4800~5000MHz)<br>23(5000~5500MHz)<br>28(5500~5950MHz)<br>21(7200~7500MHz)   | 10                   | -                                     | 1.60x0.80x0.60 | B-1       |
|                    | 4900~5850       | 50            | 0.50(25°C)<br>0.60(-40~+85°C) | 27(824~2170MHz)<br>31(2400~2500MHz)<br>26(9800~11900MHz)   |                      |                                       |                |           |
| RFDIP1606L53T      | 2400~2500       | 50            | 0.5                           | 10(3600~3750MHz)<br>20(4800~5000MHz)<br>20(5000~5950MHz)<br>10(7200~7500MHz)<br>10(9600~10000MHz)  | 10                   | -                                     | 1.60x0.80x0.60 | A-3       |
|                    | 5150~5850       | 50            | 0.6                           | 25(860~960MHz)<br>25(1545~1605MHz)<br>25(1710~1990MHz)<br>30(2170MHz)<br>25(2400~2500MHz)<br>10(8100~8800MHz)<br>15(8820~9800MHz)<br>25(9800~11900MHz) |                      |                                       |                |           |

ISM Band 2.4/5GHz Application

| Part Number        | Frequency (MHz) | Impedance (Ω) | Insertion Loss (dB)           | Attenuation (dB)   | Return Loss (dB)Min | Isolation                            | Size (mm)      | Structure |
|--------------------|-----------------|---------------|-------------------------------|--|---------------------|--------------------------------------|----------------|-----------|
| RFDIP1606L54T      | 2400~2500       | 50            | 0.5                           | 10(3600~3750MHz)<br>20(4800~5000MHz)<br>20(5000~5950MHz)<br>10(7200~7500MHz)<br>10(9600~10000MHz)  | 10                  | -                                    | 1.60x0.80x0.60 | A-4       |
|                    | 4900~5950       | 50            | 0.6                           | 25(860~960MHz)<br>25(1545~1605MHz)<br>25(1710~1990MHz)<br>30(2170MHz)<br>25(2400~2500MHz)<br>10(8100~8800MHz)<br>15(8820~9800MHz)<br>25(9800~11900MHz) |                     |                                      |                |           |
| RFDIP1607L898D1T   | 2400~2500       | 50            | 0.90(25°C)<br>1.05(-40~+85°C) | 15(700~1300MHz)<br>25(4800~5000MHz)<br>30(7000~7500MHz)  | 10                  | 30(2400~2500MHz)<br>25(4900~5950MHz) | 1.60x0.80x0.70 | A-4       |
|                    | 4900~5950       | 50            | 0.80(25°C)<br>0.95(-40~+85°C) | 27(1200~1500MHz)<br>26(1500~2000MHz)<br>20(2300~3000MHz)<br>25(9800~11900MHz)<br>15(14700~17850MHz)  |                     |                                      |                |           |
| RFDIP1606L110C8Q1C | 2400~2500       | 50            | 0.48(25°C)<br>0.58(-40~+85°C) | 20(4800~5000MHz)<br>22(5000~5950MHz)<br>20(7200~7500MHz)   | 10                  | -                                    | 1.60x0.80x0.60 | A-3       |
|                    | 4900~5950       | 50            | 0.68(25°C)<br>0.78(-40~+85°C) | 26(824~2170MHz)<br>30(2400~2500MHz)<br>25(9800~11900MHz)<br>20(15450~17550MHz)   |                     |                                      |                |           |
| RFDIP1608060LS3T55 | 2400~2500       | 50            | 0.60(25°C)<br>0.65(-40~+85°C) | 32(4800~4992MHz)<br>24(7200~7488MHz)   | 10                  | 32(30~2700MHz)<br>28(4900~5950MHz)   | 1.60x0.80x0.60 | A-4       |
|                    | 4900~5950       | 50            | 0.70(25°C)<br>0.80(-40~+85°C) | 32(30~2700MHz)<br>15(9800~11900MHz)<br>11(14700~17850MHz)  |                     |                                      |                |           |
| KFDIP2004L157B1U   | 2400~2500       | 50            | 0.5                           | 10(3600MHz)<br>20(4800~5000MHz)<br>20(7200~7500MHz)  | 10                  | 20(DC~2500MHz)<br>20(4900~5950MHz)   | 2.00x1.25x0.40 | A-3       |
|                    | 4900~5950       | 50            | 1.0                           | 20(824~915MHz)<br>20(1800~2500MHz)<br>10(3000~3900MHz)<br>4(7250MHz)<br>20(9800~11900MHz)<br>20(14700~17850MHz)  |                     |                                      |                |           |
| KFDIP2004L167B1U   | 2400~2500       | 50            | 0.5                           | 10(3600MHz)<br>20(4800~5000MHz)<br>20(7200~7500MHz)  | 10                  | 20(DC~2500MHz)<br>20(4900~5950MHz)   | 2.00x1.25x0.40 | A-4       |
|                    | 4900~5950       | 50            | 1.0                           | 20(824~915MHz)<br>20(1800~2500MHz)<br>10(3000~3900MHz)<br>4(7250MHz)<br>20(9800~11900MHz)<br>20(14700~17850MHz)  |                     |                                      |                |           |
| KFDIP2004L197B1U   | 2400~2500       | 50            | 0.6                           | 15(3600MHz)<br>25(4800~5000MHz)<br>20(7200~7500MHz)  | 10                  | 20(DC~2500MHz)<br>20(4900~5950MHz)   | 2.00x1.25x0.40 | A-3       |
|                    | 4900~5950       | 50            | 1.0                           | 20(824~915MHz)<br>18(1800~2500MHz)<br>14(3000~3900MHz)<br>20(9800~11900MHz)<br>20(14700~17850MHz)  |                     |                                      |                |           |
| RFDIP2012050L5T    | 2400~2500       | 50            | 0.7                           | 18(4800~6000MHz)<br>18(7200~7500 MHz)  | 10                  | -                                    | 2.00x1.25x0.55 | A-1       |
|                    | 4900~5900       | 50            | 1.0                           | 19(1800~2500MHz)<br>25(10300~10700MHz)   |                     |                                      |                |           |
| RFDIP2012050L7T    | 2400~2500       | 50            | 0.7                           | 18(4800~6000MHz)<br>18(7200~7500MHz)   | 10                  | -                                    | 2.00x1.25x0.55 | A-2       |
|                    | 4900~5900       | 50            | 1.0                           | 19(1800~2500MHz)<br>25(10300~10700MHz)   |                     |                                      |                |           |
| RFDIP2012050L8T    | 2300~2500       | 50            | 0.65(25°C)<br>0.8(-40~+85°C)  | 20(4600~5000MHz)<br>20(6900~7500MHz)   | 10                  | -                                    | 2.00x1.25x0.55 | A-3       |
|                    | 4900~5950       | 50            | 1.0                           | 19(1800~2500MHz)<br>25(10300~10700MHz)   |                     |                                      |                |           |

ISM Band 2.4/5GHz Application

| Part Number      | Frequency (MHz) | Impedance (Ω) | Insertion Loss (dB)           | Attenuation (dB)  | Return Loss (dB) Min | Isolation | Size (mm)      | Structure |
|------------------|-----------------|---------------|-------------------------------|---|----------------------|-----------|----------------|-----------|
| RFDIP2012100L0T  | 2400~2500       | 50            | 0.7                           | 20(4900MHz)<br>25(5200MHz)<br>25(5800MHz)   | 10                   | -         | 2.00x1.25x0.95 | A-3       |
|                  | 4900~5900       | 50            | 0.9                           | 25(2450MHz)   |                      |           |                |           |
| RFDIP2012100L3T  | 2400~2500       | 50            | 0.7                           | 20(4900MHz)<br>25(5200MHz)<br>25(5800MHz)   | 10                   | -         | 2.00x1.25x0.95 | A-2       |
|                  | 4900~5900       | 50            | 0.9                           | 25(2450MHz)   |                      |           |                |           |
| RFDIP2012050LPT  | 2400~2500       | 50            | 0.5(25°C)<br>0.55(-40~+85°C)  | 23(4800~6000MHz)<br>20(7200~7500MHz)  | 10                   | -         | 2.00x1.25x0.55 | A-1       |
|                  | 4900~5950       | 50            | 0.65(25°C)<br>0.75(-40~+85°C) | 20(800~2500MHz)<br>15(9800~11900MHz)  |                      |           |                |           |
| RFDIP2012050LQT  | 2400~2500       | 50            | 0.5(25°C)<br>0.55(-40~+85°C)  | 23(4800~6000MHz)<br>20(7200~7500MHz)  | 10                   | -         | 2.00x1.25x0.55 | A-2       |
|                  | 4900~5950       | 50            | 0.65(25°C)<br>0.75(-40~+85°C) | 20(800~2500MHz)<br>15(9800~11900MHz)  |                      |           |                |           |
| RFDIP2008L107N3T | 2400~2500       | 50            | 2.2(25°C)<br>2.4(-40~+85°C)   | 30(824~915MHz)<br>30(1545~1610MHz)<br>30(1710~1990MHz)<br>25(2110~2170MHz)<br>8(3200~3600MHz)<br>12(3700~3900MHz)<br>28(4800~5000MHz)<br>25(7200~7500MHz) | 10                   | -         | 2.00x1.25x0.80 | A-1       |
|                  | 5150~5850       | 50            | 1.2(25°C)<br>1.5(-40~+85°C)   | 20(1545~1610MHz)<br>20(1710~1990MHz)<br>20(2110~2170MHz)<br>23(2400~2500MHz)<br>8(3450~3900MHz)<br>8(7250~7800MHz)<br>20(9800~11700MHz)                   |                      |           |                |           |
| RFDIP2008L117N3T | 2400~2500       | 50            | 2.2(25°C)<br>2.4(-40~+85°C)   | 30(824~915MHz)<br>30(1545~1610MHz)<br>30(1710~1990MHz)<br>25(2110~2170MHz)<br>8(3200~3600MHz)<br>12(3700~3900MHz)<br>28(4800~5000MHz)<br>25(7200~7500MHz) | 10                   | -         | 2.00x1.25x0.80 | A-2       |
|                  | 5150~5850       | 50            | 1.2(25°C)<br>1.5(-40~+85°C)   | 20(1545~1610MHz)<br>20(1710~1990MHz)<br>20(2110~2170MHz)<br>23(2400~2500MHz)<br>8(3450~3900MHz)<br>8(7250~7800MHz)<br>20(9800~11700MHz)                   |                      |           |                |           |
| AMDIP2520070L3T  | 2400~2500       | 50            | 2.4(25°C)<br>2.7(-40~+85°C)   | 30(824~915MHz)<br>30(1545~1610MHz)<br>24(1710~1990MHz)<br>15(2110~2170MHz)<br>30(4800~5000MHz)<br>20(7200~7500MHz)  | 10                   | -         | 2.50x2.00x0.70 | E-1       |
|                  | 5150~5850       | 50            | 1.2(25°C)<br>1.5(-40~+85°C)   | 25(1545~1610MHz)<br>25(2400~2500MHz)<br>15(10300~11700MHz)  |                      |           |                |           |
| AMDIP2520070L4T  | 2400~2500       | 50            | 2.4(25°C)<br>2.7(-40~+85°C)   | 30(824~915MHz)<br>30(1545~1610MHz)<br>24(1710~1990MHz)<br>15(2110~2170MHz)<br>30(4800~5000MHz)<br>20(7200~7500MHz)  | 10                   | -         | 2.00x1.25x0.80 | E-2       |
|                  | 5150~5850       | 50            | 1.2(25°C)<br>1.5(-40~+85°C)   | 25(1545~1610MHz)<br>25(2400~2500MHz)<br>15(10300~11700MHz)  |                      |           |                |           |

GPS 1.575GHz/ISM 2.4GHz/5GHz Band Application

| Part Number        | Frequency (MHz)                     | Impedance ( $\Omega$ ) | Insertion Loss (dB)           | Attenuation (dB)   | Return Loss (dB)Min. | Size (mm)      | Structure |
|--------------------|-------------------------------------|------------------------|-------------------------------|--|----------------------|----------------|-----------|
| RFDIP1608060T1T    | 1574~1577                           | 50                     | 0.65                          | 20(2400~2500MHz)   | 10                   | 1.60x0.80x0.60 | B-1       |
|                    | 2400~2500                           | 50                     | 0.8                           | 20(1574~1577MHz)   |                      |                |           |
| RFDIP1608060TM7T62 | 1570~1610                           | 50                     | 0.6(typ.0.5)                  | 20(2400~2500MHz)<br>20(4900~5900MHz)                     | 10                   | 1.60x0.80x0.60 | A-4       |
|                    | 2400~2500<br>4900~5900              | 50                     | 0.65(typ.0.55)                | 20(1570~1610MHz)   |                      |                |           |
| RFDIP1608060TAT    | 698~960<br>1427~1511<br>1560~1607   | 50                     | 0.40<br>0.55<br>0.65          | 20(2400~2500MHz)<br>20(2620~2690MHz)<br>20(5150~5850MHz) | 10                   | 1.60x0.80x0.60 | B-1       |
|                    | 2400~2500<br>2620~2690<br>5150~5850 | 50                     | 0.70<br>0.60<br>0.80          | 20(698~960MHz)<br>20(1427~1511MHz)<br>20(1560~1607MHz)   |                      |                |           |
| RFDIP1608060TCT    | 1570~1610                           | 50                     | 0.6(typ.0.5)                  | 20(2400~2500MHz)<br>20(4900~5900MHz)                     | 10                   | 1.60x0.80x0.60 | A-4       |
|                    | 2400~2500<br>4900~5900              | 50                     | 0.65(typ.0.55)                | 20(1570~1610MHz)   |                      |                |           |
| RFDIP1608060TDT    | 1570~1610                           | 50                     | 0.65(25°C)<br>0.75(-40~+85°C) | 13(2170MHz)<br>20(2400~2500MHz)                          | 10                   | 1.60x0.80x0.60 | B-2       |
|                    | 2400~2500                           | 50                     | 0.80(25°C)<br>0.90(-40~+85°C) | 20(1565~1616MHz)<br>15(1710MHz)                          |                      |                |           |
| RFDIP2012090T2T    | 1572.5~1578.5<br>1597~1607          | 50                     | 0.40<br>0.50                  | 13(2400~2500MHz)   | 10                   | 2.00x1.25x0.90 | A-3       |
|                    | 2400~2500                           | 50                     | 0.55(25°C)<br>0.65(-40~+85°C) | 22(1572.5~1578.5MHz)<br>20(1597~1607MHz)                 |                      |                |           |
| RFDIP2520080T1T    | 1710~1990<br>1990~2110<br>2110~2170 | 50                     | 1.00<br>1.50<br>2.50          | 5(2300~2350MHz)<br>10(2350~2500MHz)<br>10(2500~2690MHz)  | 10                   | 2.50x2.00x0.80 | C-2       |
|                    | 2300~2350<br>2350~2500<br>2500~2690 | 50                     | 2.65<br>1.50<br>0.65          | 8(1710~1990MHz)<br>8(1990~2110MHz)<br>5(2110~2170MHz)    |                      |                |           |


892 MHz & 1.94GHz Band Working Frequency

| Part Number        | Frequency (MHz) | Impedance ( $\Omega$ ) | Insertion Loss (dB)           | Attenuation (dB)                     | Return Loss (dB)Min. | Size (mm)      | Structure |
|--------------------|-----------------|------------------------|-------------------------------|--------------------------------------|----------------------|----------------|-----------|
| RFDIP1608070GM1T76 | 698~960         | 50                     | 0.8(typ.0.45)                 | 25(1710~2700MHz)                     | 10                   | 1.60x0.80x0.60 | D-2       |
|                    | 1710~2700       |                        | 0.7(typ.0.50)                 | 20(698~960MHz)<br>20(5150~5850MHz)   |                      |                |           |
| RFDIP2012070G5T    | 570~960         | 50                     | 0.75                          | 20(1427~2700MHz)                     | 10                   | 2.00x1.25x0.70 | C-1       |
|                    | 1427~2700       |                        | 0.85                          | 20(570~960MHz)                       |                      |                |           |
| RFDIP2012090G77N2T | 698~960         | 50                     | 0.65                          | 15(1554~1580MHz)<br>20(1710~2700MHz) | 10                   | 2.00x1.25x0.90 | A-4       |
|                    | 1710~2700       |                        | 0.65                          | 20(824~960MHz)                       |                      |                |           |
| RFDIP2012090GM1T58 | 698~960         | 50                     | 0.4(25°C)<br>0.45(-40~+85°C)  | 13(1710~2690MHz)                     | 10                   | 2.00x1.25x0.90 | C-1       |
|                    | 1710~2690       |                        | 0.55(25°C)<br>0.65(-40~+85°C) | 19(698~960MHz)                       |                      |                |           |
| RFDIP2520100G2T    | 698~960         | 50                     | 0.35(25°C)<br>0.45(-40~+85°C) | 20(1710~2690MHz)                     | 10                   | 2.50x2.00x1.00 | F         |
|                    | 1710~2690       |                        | 0.55(25°C)<br>0.65(-40~+85°C) | 25(698~960MHz)<br>5(3420~3820MHz)    |                      |                |           |




■ TYPICAL ELECTRICAL CHARACTERISTICS


RFDIP1004L10T

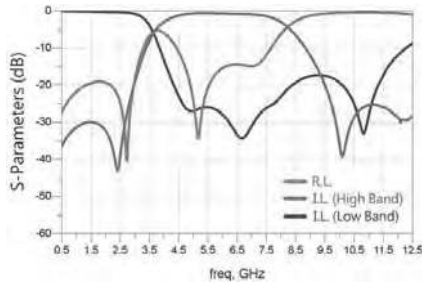


RFDIP1608060LCT

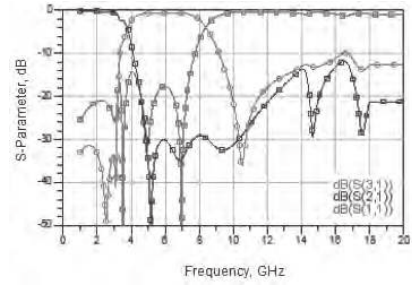


RFDIP1608060LET

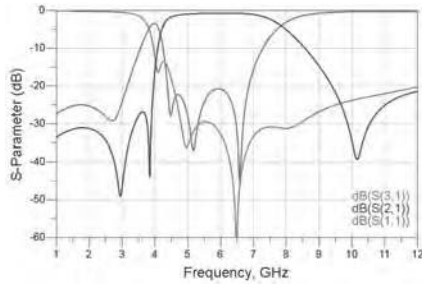


RFDIP1608060LFT

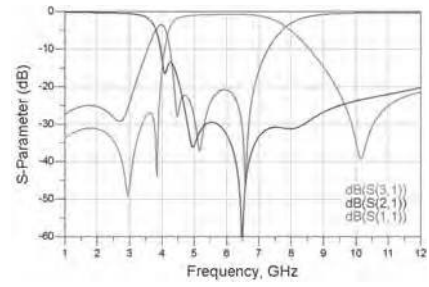


RFDIP160806BLM6T25

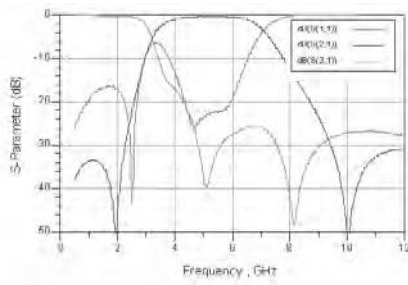


RFDIP160806ALM6T30

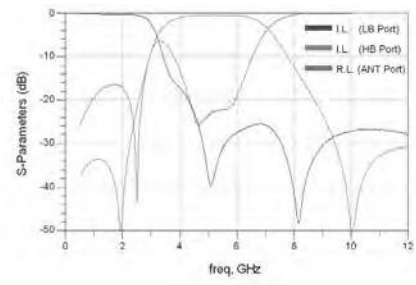


RFDIP1608060LM0T60

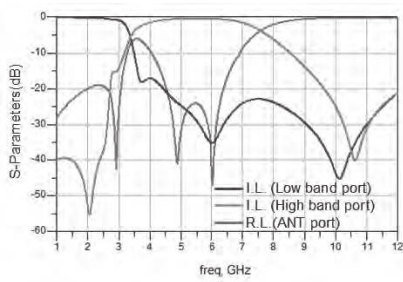


RFDIP160806BLM6T68

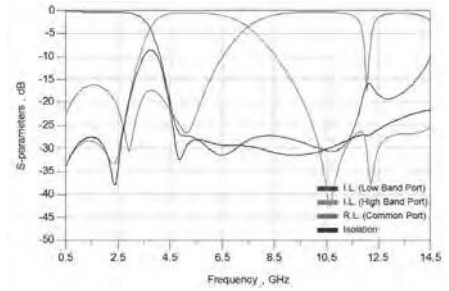

RFDIP1608060LVT

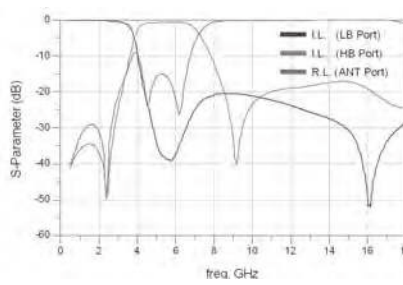


RFDIP1608060LST

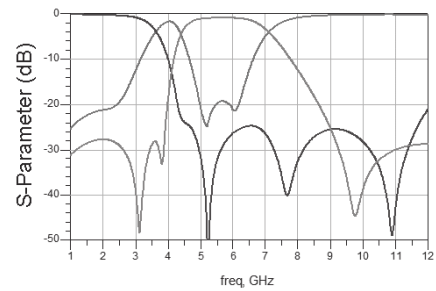


TYPICAL ELECTRICAL CHARACTERISTICS


RFDIP1608060LY8Q1C

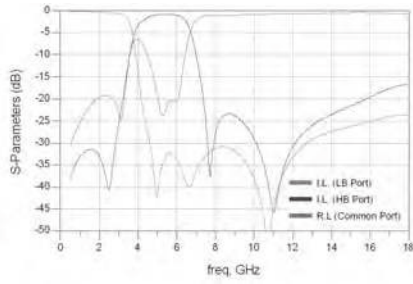


RFDIP1606L168M1U

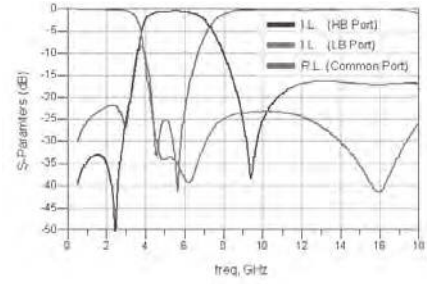


RFDIP1606L23T

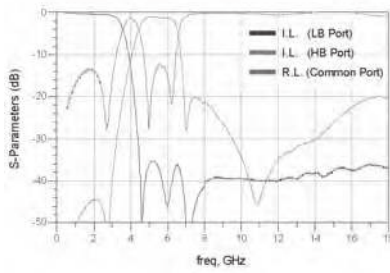


RFDIP1606L24T

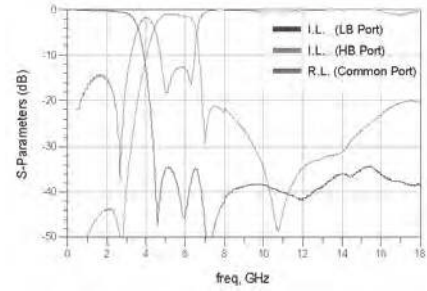


RFDIP1606L29T

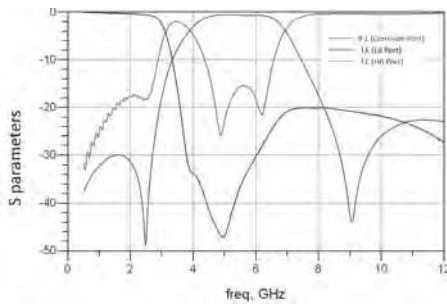


RFDIP1606L51T

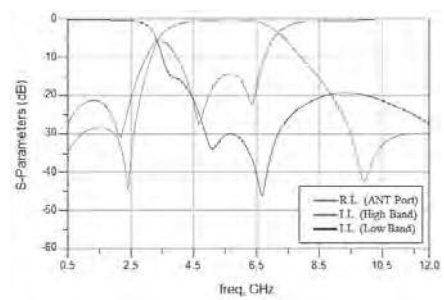


RFDIP1606L52T

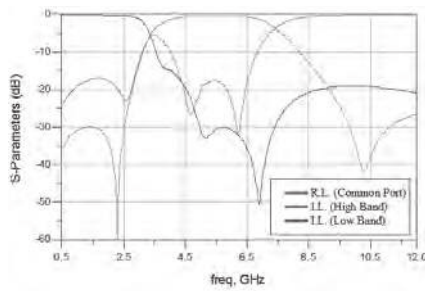


RFDIP1606L53T

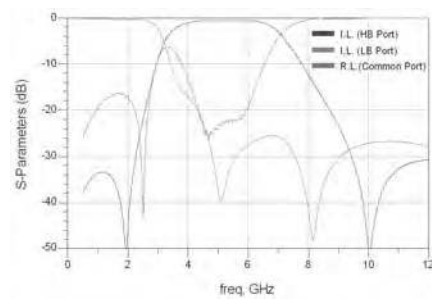

RFDIP1606L54T

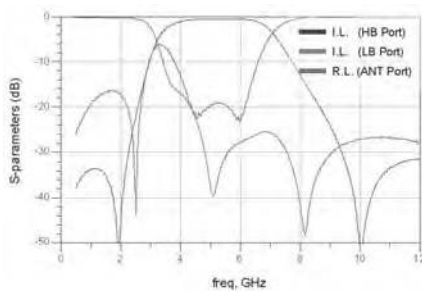


RFDIP1607L898D1T

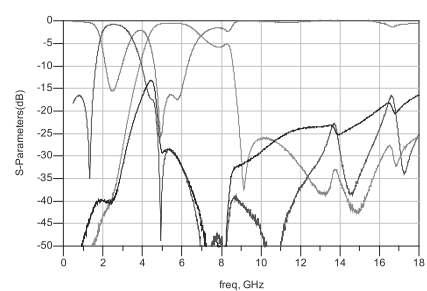


TYPICAL ELECTRICAL CHARACTERISTICS


RFDIP1606L110C8Q1C

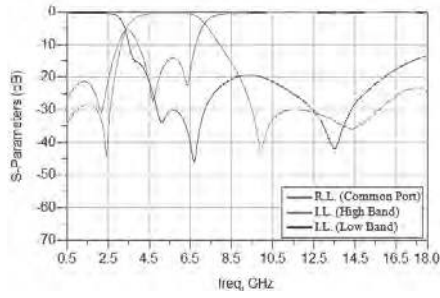


RFDIP1608060LS3T55

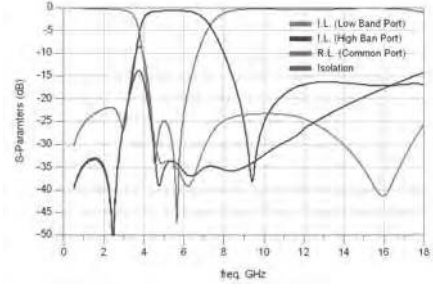


KFDIP2004L157B1U

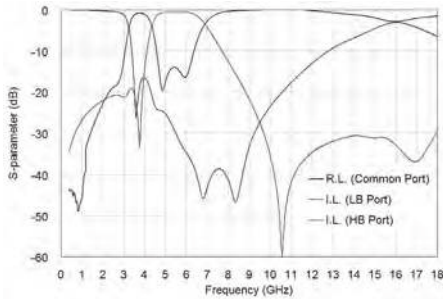


KFDIP2004L167B1U

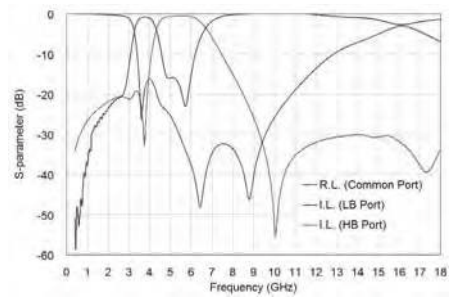


KFDIP2004L197B1U

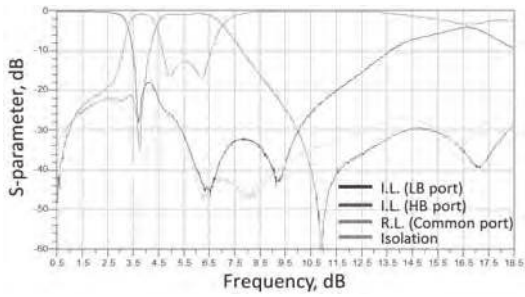


RFDIP2012050L5T

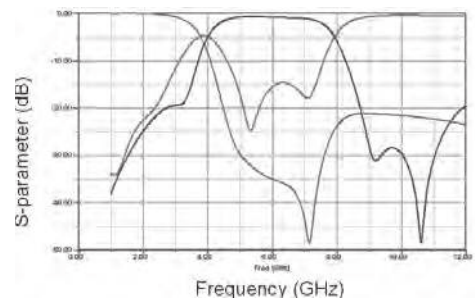


RFDIP2012050L7T

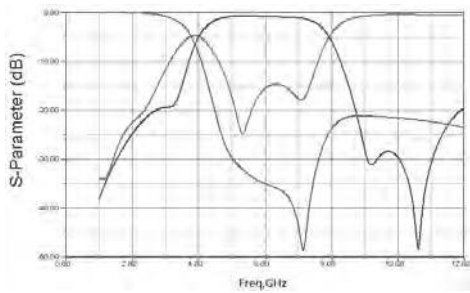


RFDIP2012050L8T

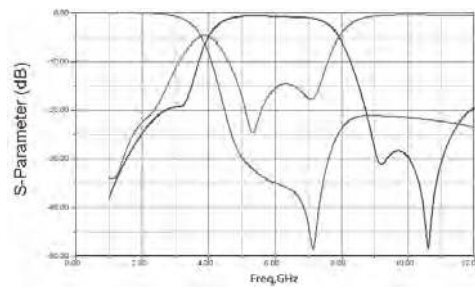

RFDIP2012050LPT

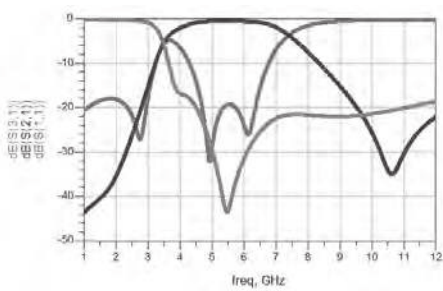


RFDIP2012050LQT

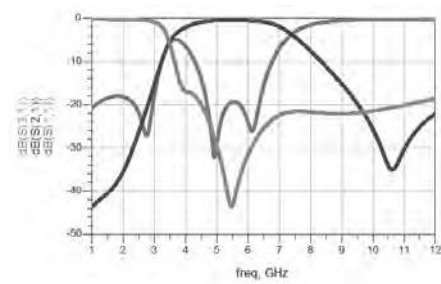


TYPICAL ELECTRICAL CHARACTERISTICS


RFDIP2008L107N3T

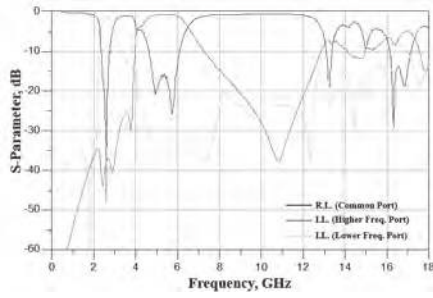


RFDIP2008L117N3T

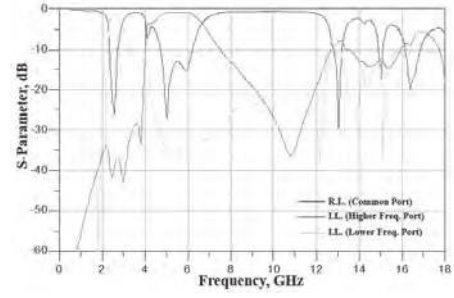


AMDIP2520070L3T

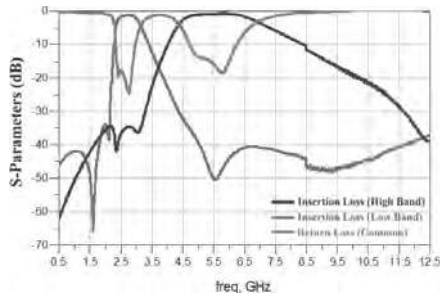


AMDIP2520070L4T

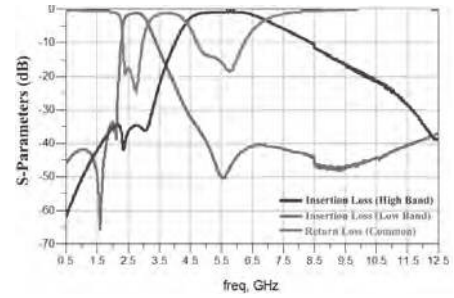


RFDIP1608060T1T

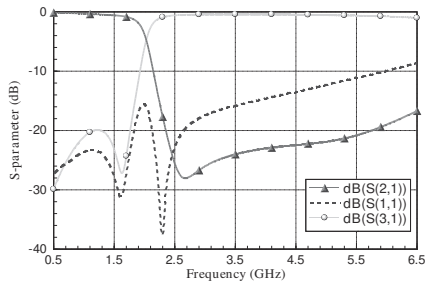


RFDIP1608060TM7T62

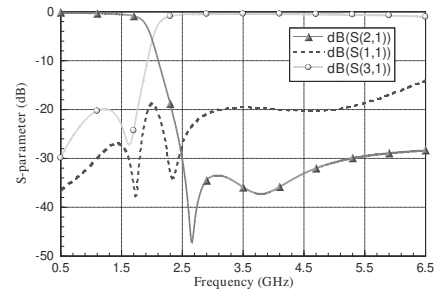


RFDIP1608060TAT

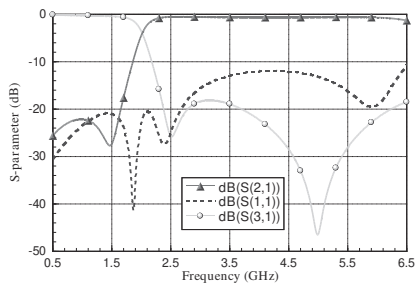


RFDIP1608060TCT

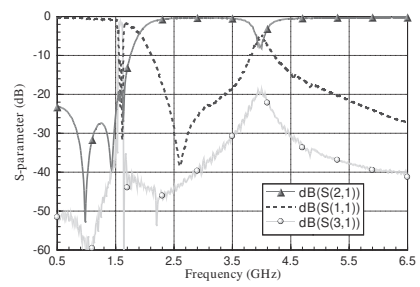

RFDIP1608060TDT

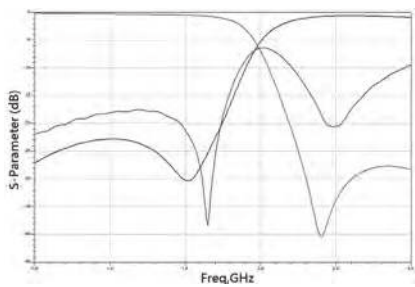


RFDIP2012090T2T

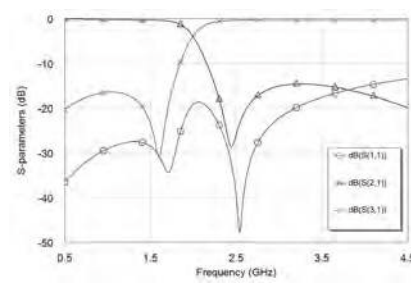


TYPICAL ELECTRICAL CHARACTERISTICS


RFDIP2520080T1T

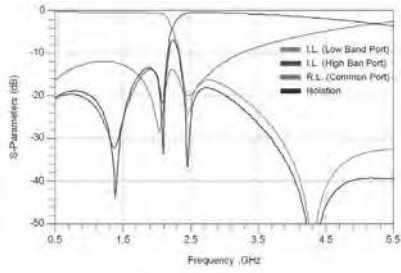


RFDIP1608070GM1T76

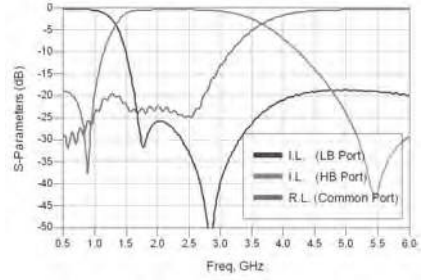


RFDIP2012070G5T

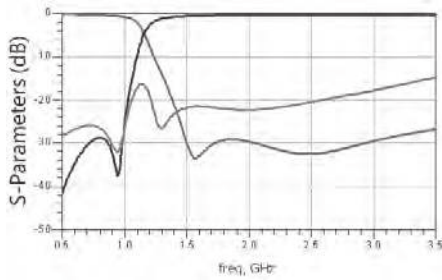


RFDIP2012090G77N2T

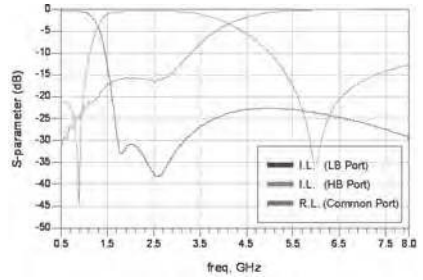

RFDIP2012090GM1T58

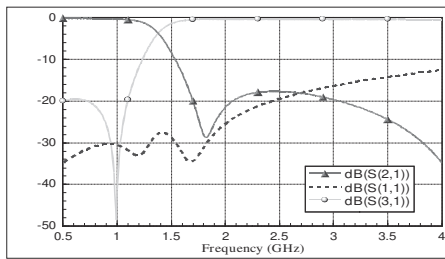


RFDIP2520100G2T

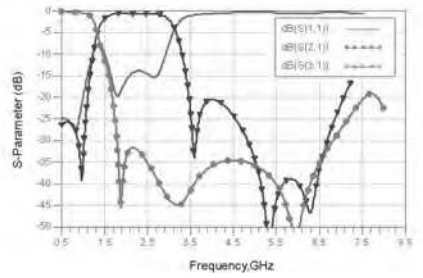

- For more information, please contact with local sales representative
- All specifications are subject to change without notice

TRIPLEXER

■ STRUCTURE AND PIN ASSOCIATED

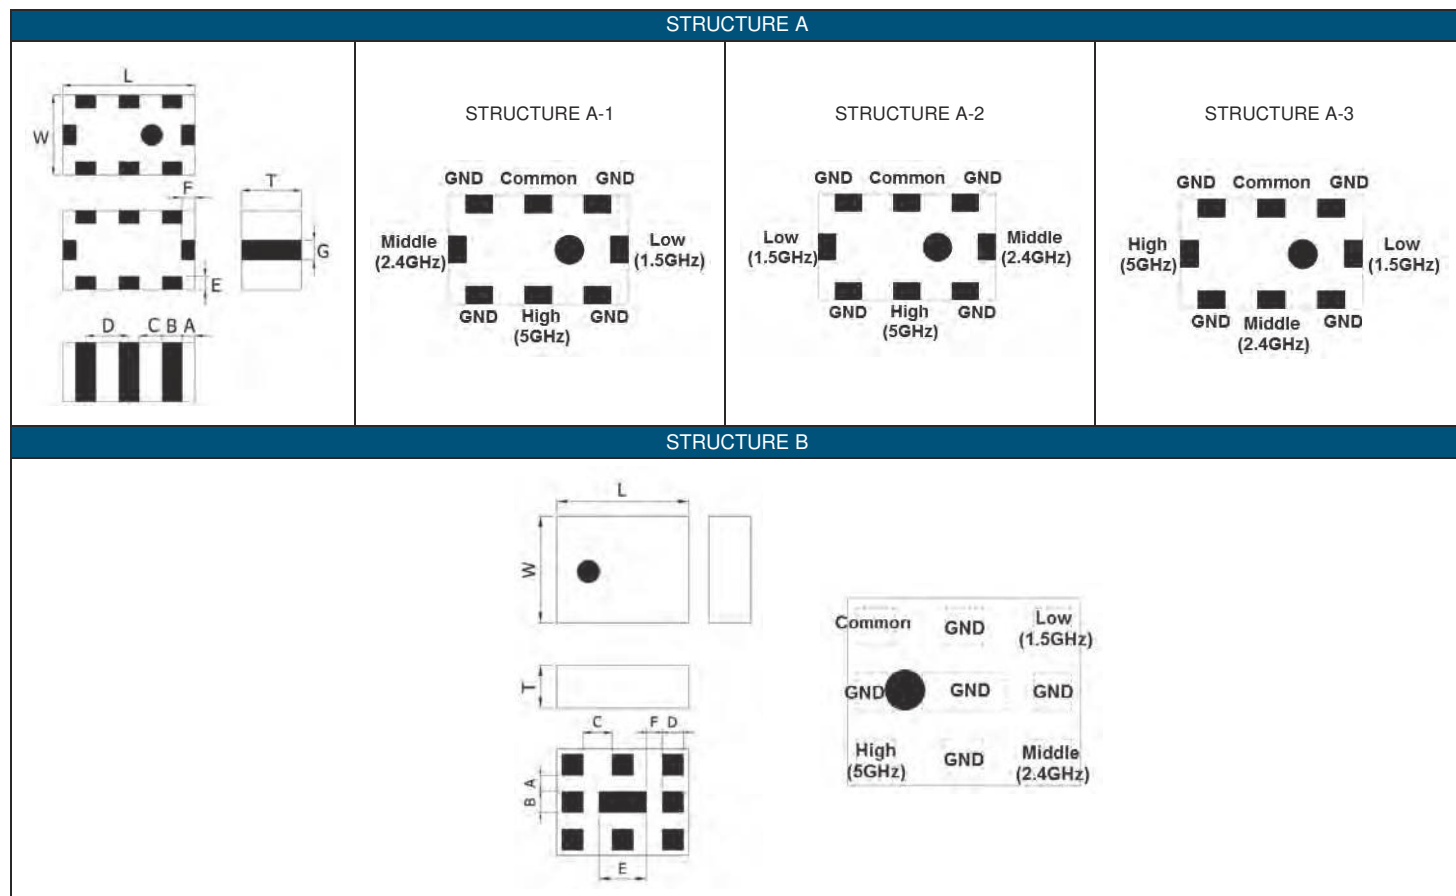

■ STRUCTURE AND DIMENSION

Unit: mm

| Structure\ Dimension | L         | W         | T         | A         | B         | C         | D         | E         | F         | G         |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| A                    | 2.00±0.15 | 1.25±0.15 | 0.90±0.10 | 0.20±0.20 | 0.30±0.20 | 0.35±0.20 | 0.65±0.20 | 0.20±0.20 | 0.20±0.20 | 0.30±0.20 |
| B                    | 2.50±0.15 | 2.00±0.15 | 0.90±0.10 | 0.30±0.10 | 0.40±0.10 | 0.55±0.10 | 0.40±0.10 | 0.90±0.10 | 0.30±0.10 | 0.30±0.10 |

■ ELECTRICAL SPECIFICATION

GPS 1.575GHz/ISM 2.4GHz/5GHz band RF application

| Part Number        | Frequency (MHz) | Impedance (Ω) | Insertion Loss (dB) | Attenuation (dB)  | Return Loss (dB) Min | Isolation                              | Size (mm)      | Structure |
|--------------------|-----------------|---------------|---------------------|---|----------------------|--|----------------|-----------|
| RFTIP2012090T18Q1C | 1560~1606       | 50            | 0.6                 | 15(2400~2500 MHz)<br>15(4800~6000 MHz)  | 10                   | -                                      | 2.00x1.25x0.90 | A-1       |
|                    | 2400~2500       | 50            | 0.7                 | 10(860~960 MHz)<br>15(1545~1605 MHz)<br>10(3600~3750 MHz)<br>20(4800~6000 MHz)<br>10(7200~7500 MHz)<br>10(9600~10000 MHz)                 | 10                   | 20(1559~1606 MHz)<br>25(4800~5000 MHz) |                |           |
|                    | 4900~5950       | 50            | 0.8                 | 25(860~960 MHz)<br>25(1545~1605 MHz)<br>25(1710~1990 MHz)<br>30(2170 MHz)<br>10(8100~8800 MHz)<br>15(8820~9800 MHz)<br>25(9800~11900 MHz) | 10                   | 20(1559~1606 MHz)                      |                |           |

■ ELECTRICAL SPECIFICATION


GPS 1.575GHz/ ISM 2.4GHz/5GHz band RF application

| Part Number        | Frequency (MHz) | Impedance (Ω) | Insertion Loss (dB)           | Attenuation (dB)   | Return Loss (dB) Min | Isolation                              | Size (mm)      | Structure |
|--------------------|-----------------|---------------|-------------------------------|--|----------------------|--|----------------|-----------|
| RFTIP2012090T27N3T | 1560~1606       | 50            | 0.65(25°C)<br>0.70(-40~+85°C) | 20(2400~2500 MHz)<br>20(4900~6000 MHz)   | 10                   | -                                      | 2.00x1.25x0.90 | A-2       |
|                    | 2400~2500       | 50            | 0.70(25°C)<br>0.85(-40~+85°C) | 10(860~960 MHz)<br>15(1545~1610 MHz)<br>10(3600~3750 MHz)<br>20(4800~6000 MHz)<br>10(7200~7500 MHz)<br>10(9600~10000 MHz)  | 10                   | 20(1559~1606 MHz)<br>20(4800~5000 MHz) |                |           |
|                    | 4900~5950       | 50            | 0.80(25°C)<br>0.95(-40~+85°C) | 25(1559~1606 MHz)<br>35(2400~2500 MHz)<br>12(3400~3600 MHz)<br>12(3600~3900 MHz)<br>10(6900~7200 MHz)<br>10(7200~7800 MHz)<br>25(10300~11700 MHz)<br>15(15300~16200 MHz) | 10                   | 20(1559~1606 MHz)                      |                |           |
| RFTIP2012090T9T    | 1560~1606       | 50            | 0.7                           | 15(2400~2500 MHz)<br>15(4800~6000 MHz)   | 10                   | -                                      | 2.00x1.25x0.90 | A-3       |
|                    | 2400~2500       | 50            | 0.8                           | 10(860~960 MHz)<br>15(1545~1605 MHz)<br>8(3600~3750 MHz)<br>20(4800~5000 MHz)<br>10(7200~7500 MHz)<br>10(9600~10000 MHz)   | 10                   |  |                |           |
|                    | 4900~5950       | 50            | 0.9                           | 25(860~960 MHz)<br>25(1545~1605 MHz)<br>25(1710~1990 MHz)<br>30(2170 MHz)<br>38(2400~2500 MHz)<br>8(8100~8800 MHz)<br>15(8820~9800 MHz)<br>22(9800~11900 MHz)            | 10                   |  |                |           |
| RFTIP2012090TLT    | 1560~1606       | 50            | 0.70(25°C)<br>0.80(-40~+85°C) | 14(2400~2500 MHz)<br>15(4800~6000 MHz)   | 10                   | -                                      | 2.00x1.25x0.90 | A-1       |
|                    | 2400~2500       | 50            | 0.80(25°C)<br>0.95(-40~+85°C) | 10(860~960 MHz)<br>10(1545~1605 MHz)<br>8(3600~3750 MHz)<br>20(4800~5000 MHz)<br>10(7200~7500 MHz)<br>5(9600~10000 MHz))   | 10                   |  |                |           |
|                    | 4900~5950       | 50            | 0.90(25°C)<br>1.10(-40~+85°C) | 24(860~960 MHz)<br>24(1545~1605 MHz)<br>25(1710~1990 MHz)<br>25(2170 MHz)<br>0.2(3920~4720 MHz)<br>10(8100~8800 MHz)<br>14(8820~9800 MHz)<br>20(9800~11900 MHz)          | 10                   |  |                |           |
| RFTIP2109ATM0T63   | 1560~1606       | 50            | 0.60(25°C)<br>0.80(-40~+85°C) | 15(2400~2500 MHz)<br>15(4800~6000 MHz)   | 10                   | -                                      | 2.00x1.25x0.90 | A-1       |
|                    | 2400~2500       | 50            | 0.70(25°C)<br>0.90(-40~+85°C) | 10(860~960 MHz)<br>15(1545~1605 MHz)<br>10(3600~3750 MHz)<br>20(4800~5000 MHz)<br>10(7200~7500 MHz)<br>10(9600~10000 MHz)  | 10                   | 20(1559~1606 MHz)<br>25(4800~5000 MHz) |                |           |
|                    | 4900~5950       | 50            | 0.80(25°C)<br>1.00(-40~+85°C) | 25(860~960 MHz)<br>25(1545~1605 MHz)<br>25(1710~1990 MHz)<br>30(2170 MHz)<br>10(8100~8800 MHz)<br>15(8820~9800 MHz)<br>25(9800~11900 MHz)                                | 10                   | 25(1559~1606 MHz)                      |                |           |

GPS 1.575GHz/ ISM 2.4GHz/5GHz band RF application


| Part Number      | Frequency (MHz) | Impedance ( $\Omega$ ) | Insertion Loss (dB)           | Attenuation (dB)  | Return Loss (dB) Min | Isolation                              | Size (mm)      | Structure |
|------------------|-----------------|------------------------|-------------------------------|---|----------------------|--|----------------|-----------|
| RFTIP2109BTM5T62 | 1560~1606       | 50                     | 0.60(25°C)<br>0.80(-40~+85°C) | 15(2400~2500 MHz)<br>15(4800~6000 MHz)  | 10                   | -                                      | 2.00x1.25x0.90 | A-2       |
|                  | 2400~2500       | 50                     | 0.70(25°C)<br>0.90(-40~+85°C) | 10(860~960 MHz)<br>15(1545~1605 MHz)<br>10(3600~3750 MHz)<br>20(4800~5000 MHz)<br>10(7200~7500 MHz)<br>10(9600~10000 MHz)                 | 10                   | 20(1559~1606 MHz)<br>25(4800~5000 MHz) |                |           |
|                  | 4900~5950       | 50                     | 0.80(25°C)<br>1.00(-40~+85°C) | 25(860~960 MHz)<br>25(1545~1605 MHz)<br>25(1710~1990 MHz)<br>30(2170 MHz)<br>10(8100~8800 MHz)<br>15(8820~9800 MHz)<br>25(9800~11900 MHz) | 10                   | 25(1559~1606 MHz)                      |                |           |
| RFTIP2520090T3T  | 698~960         | 50                     | 0.70(25°C)<br>0.80(-40~+85°C) | 20(1710~2200 MHz)<br>20(2500~2690 MHz)  | 10                   | 20(1710~2200 MHz)<br>20(2500~2690 MHz) | 2.50x2.00x0.90 | C         |
|                  | 1710~2200       | 50                     | 1.40(25°C)<br>1.60(-40~+85°C) | 20(698~960 MHz)<br>15(2500~2690 MHz)  | 10                   | 18(698~960 MHz)<br>18(2500~2690 MHz)   |                |           |
|                  | 2500~2690       | 50                     | 1.80(25°C)<br>2.00(-40~+85°C) | 15(698~960 MHz)<br>15(1710~2200 MHz)  | 10                   | 20(698~960 MHz)<br>20(1710~2200 MHz)   |                |           |

■ TYPICAL ELECTRICAL CHARACTERISTICS

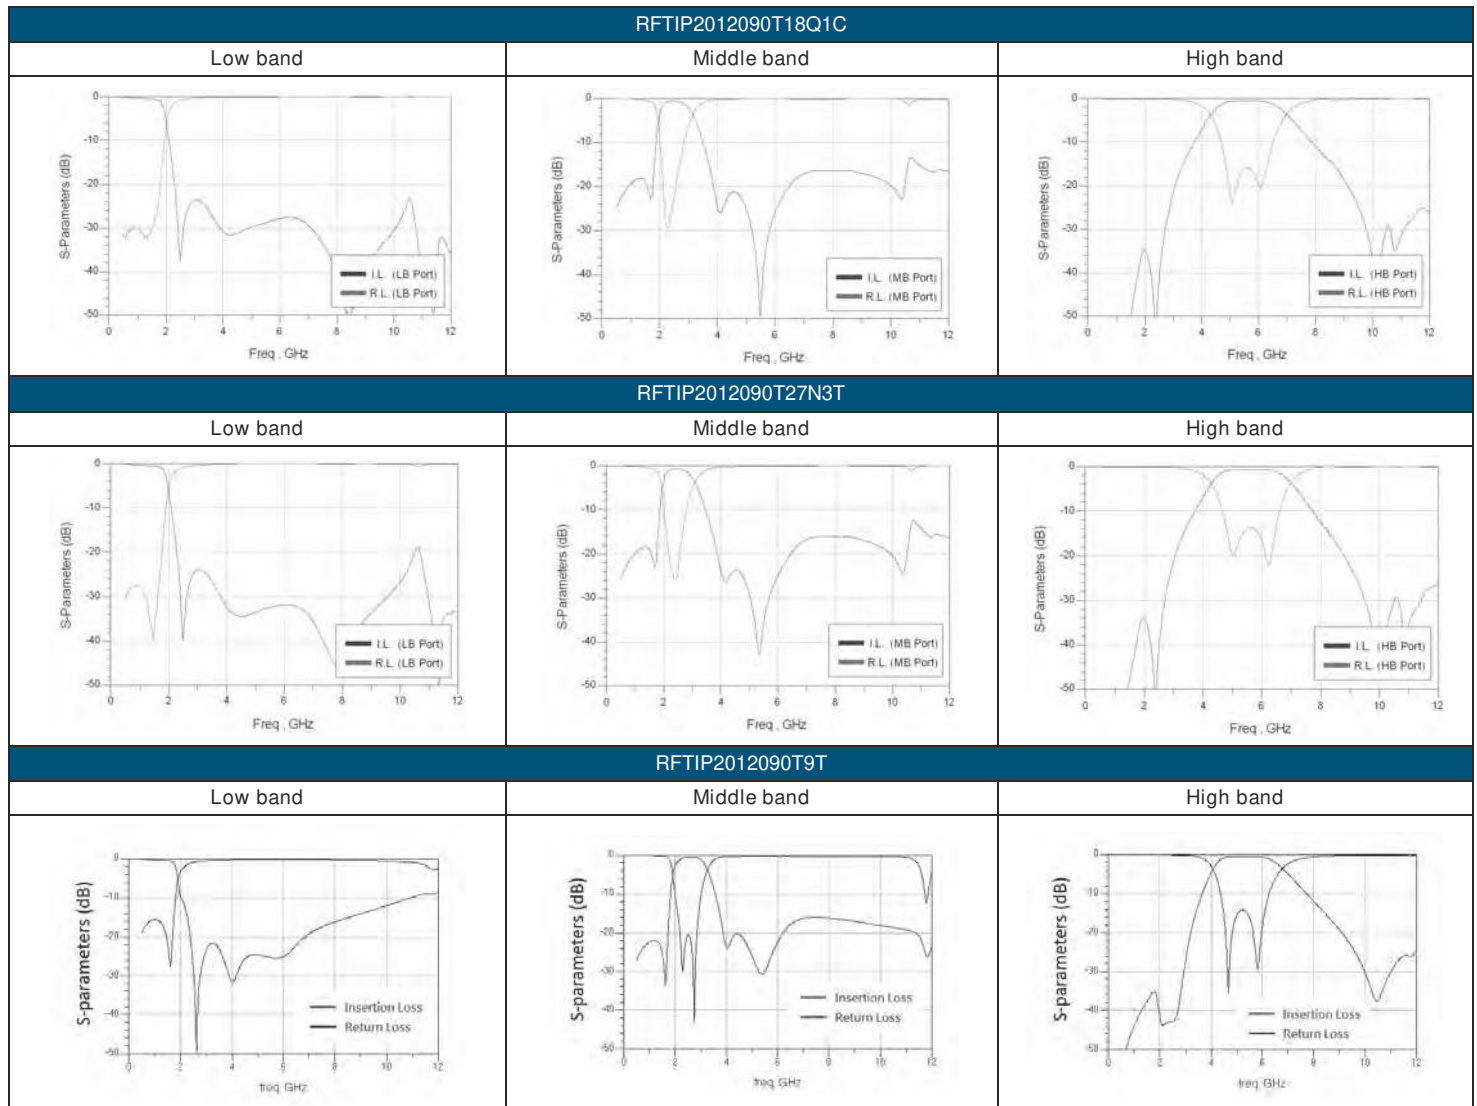




TYPICAL ELECTRICAL CHARACTERISTICS

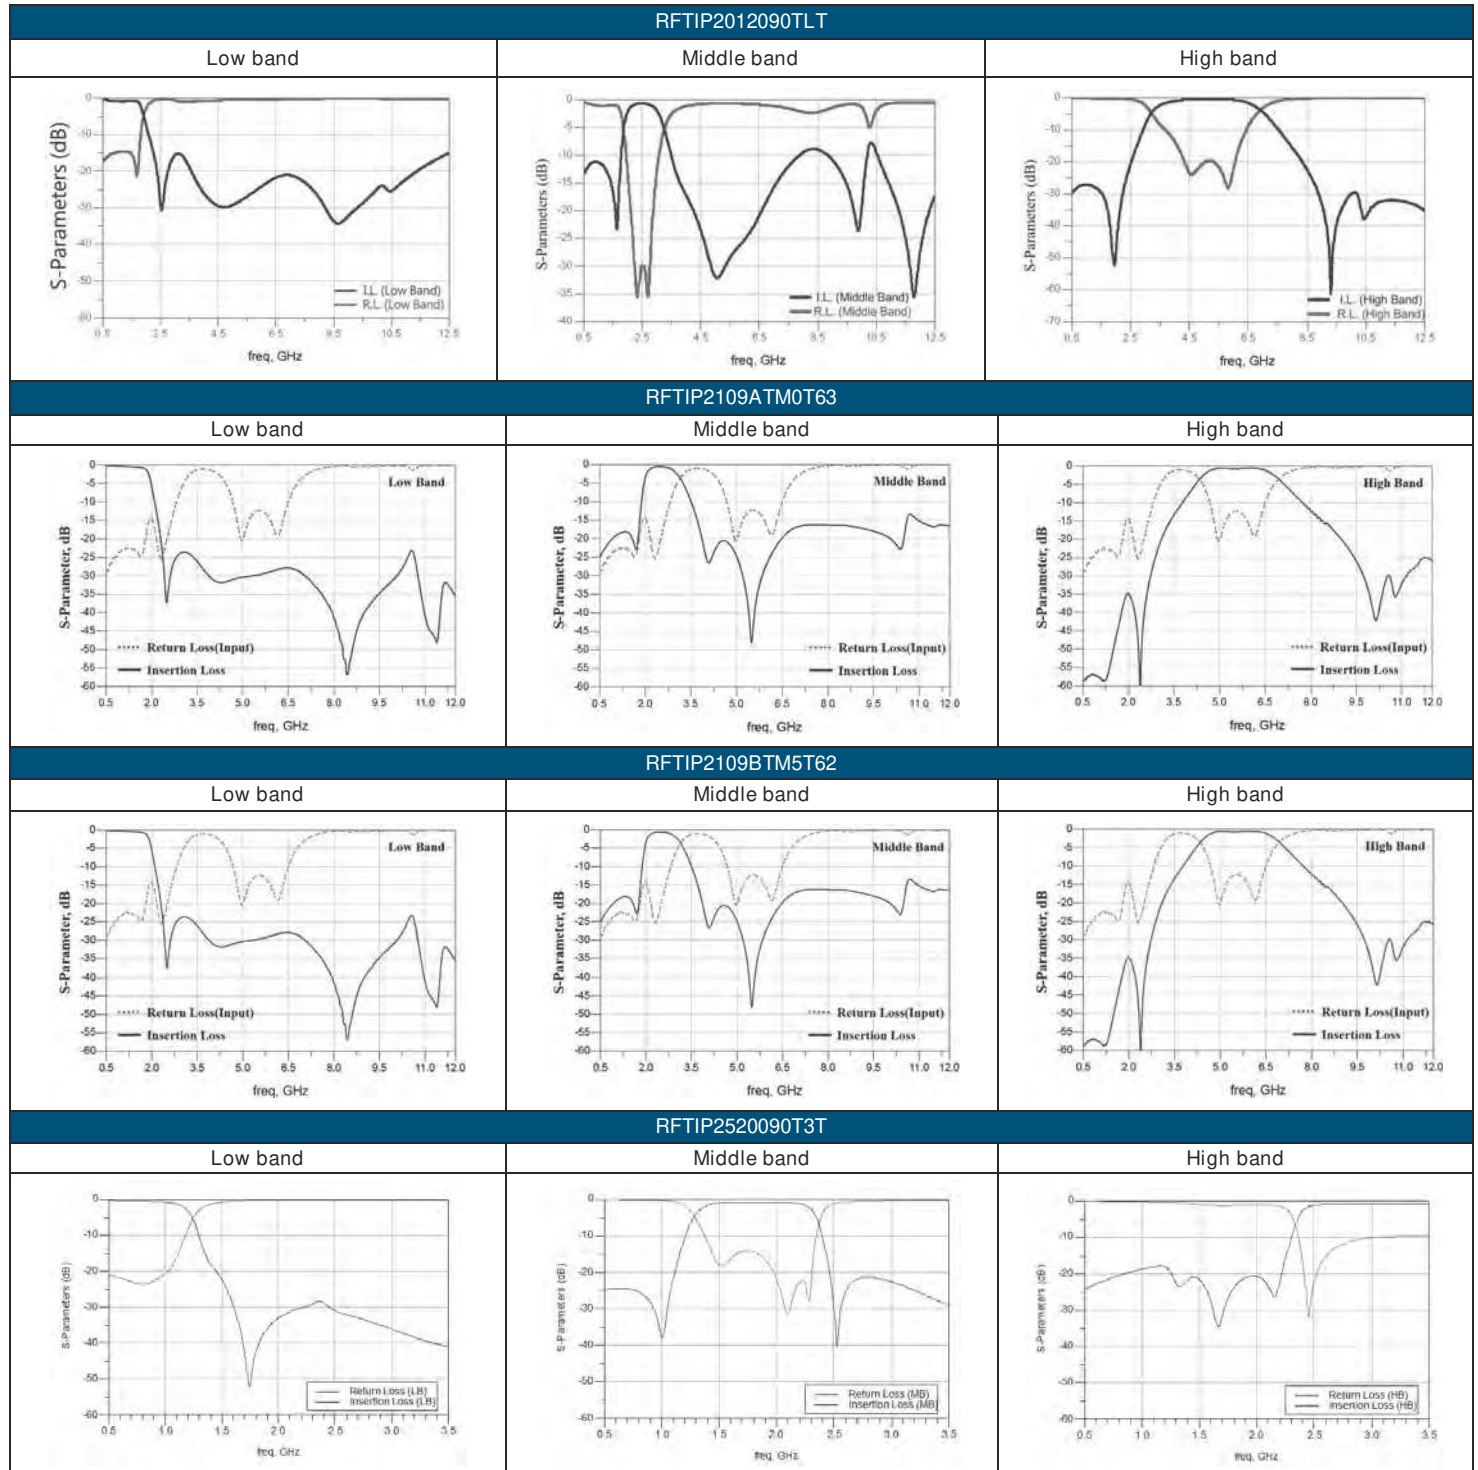

- For more information, please contact with local sales representative
- All specifications are subject to change without notice

COMMON MODE FILTER

■ STRUCTURE AND PIN ASSOCIATED

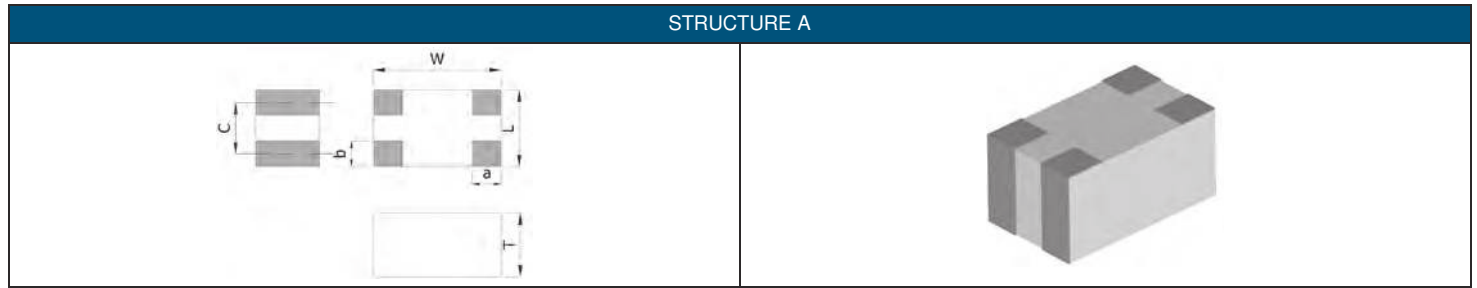

■ STRUCTURE AND DIMENSION

| Structure\ Dimension | L                  | W                  | T         | a         | b         | c         |
|----------------------|--------------------|--------------------|-----------|-----------|-----------|-----------|
| A                    | 1.20±0.40<br>-0.20 | 2.00±0.40<br>-0.20 | 1.00±0.20 | 0.45±0.20 | 0.40±0.20 | 0.80±0.10 |
|                      | 1.60±0.20          | 3.20±0.20          | 0.95±0.20 | 0.60±0.20 | 0.50±0.20 | 1.10±0.20 |
|                      |                    |                    | 1.00±0.20 | 0.60±0.20 | 0.50±0.20 | 1.10±0.20 |


Unit: mm

■ ELECTRICAL SPECIFICATION

DISCRETE CMF for HIGH SPEED TRANSMISSION LINES USB2.0 IEEE1394 LVDS(mini)

| Part Number     | Characteristic Impedance (Differential) | Common Mode Attenuation (Min. ) | DC Resistance (Ω) max. | Rated Current (mA) | Size(mm)       | Structure |
|-----------------|---|---------------------------------|------------------------|--------------------|----------------|-----------|
| RFCMF1220100M3T | 90 ohm                                  | 9.0(240MHz ~ 1GHz)              | 1.5                    | 300                | 1.20x2.00x1.00 | A         |
| RFCMF1220100M4T | 90 ohm                                  | 9.0(130 MHz ~ 1GHz)             | 2.5                    | 200                | 1.20x2.00x1.00 | A         |
| RFCMF1632090M1T | 90 ohm                                  | 9.0(140 MHz ~ 1.0 GHz)          | 1.5                    | 300                | 1.60x3.20x0.95 | A         |
| RFCMF1632100M3T | 90 ohm                                  | 9.0(240 MHz ~ 1.0 GHz)          | 1.5                    | 300                | 1.60x3.20x1.00 | A         |


■ TYPICAL ELECTRICAL CHARACTERISTICS

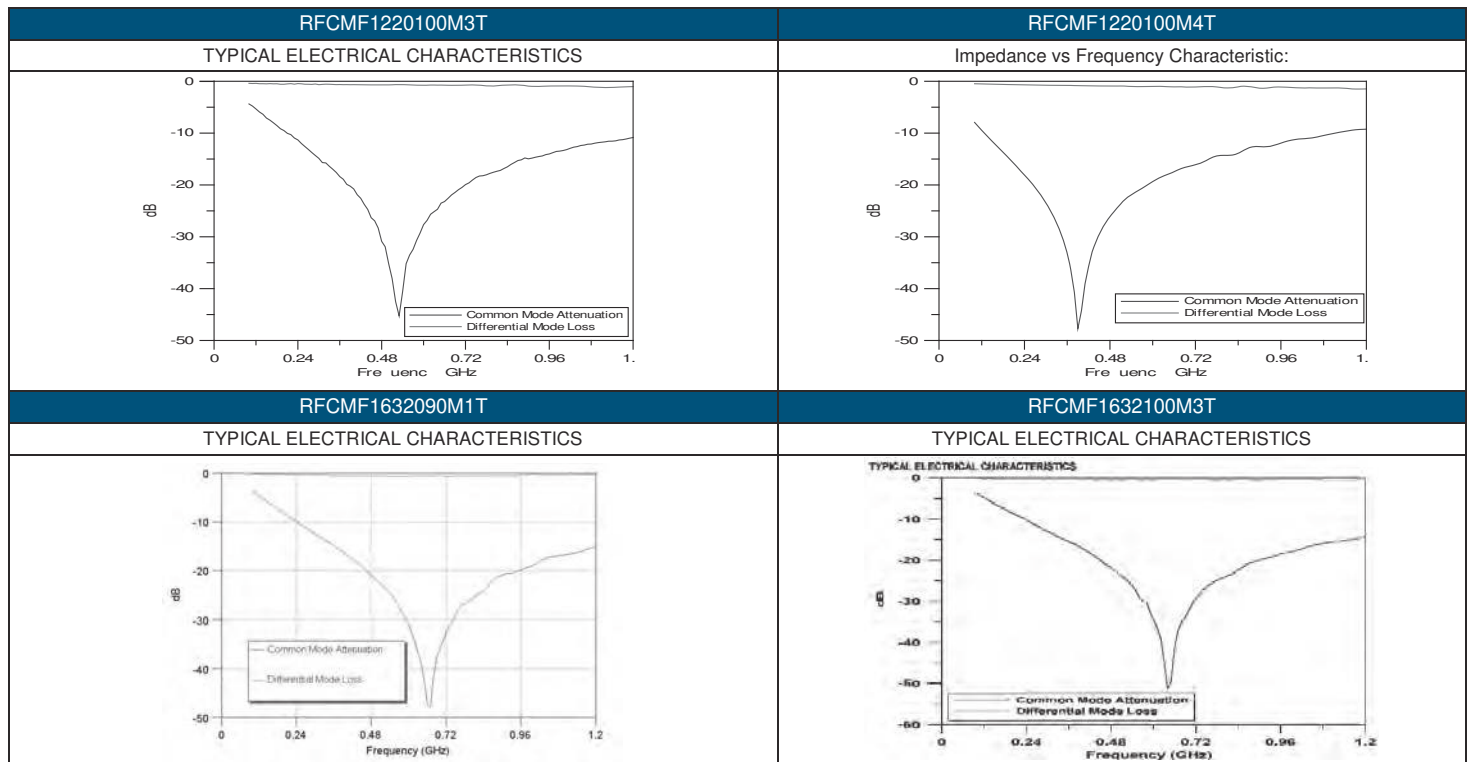

- For more information, please contact with local sales representative
- All specifications are subject to change without notice

COUPLER

■ STRUCTURE AND PIN ASSOCIATED

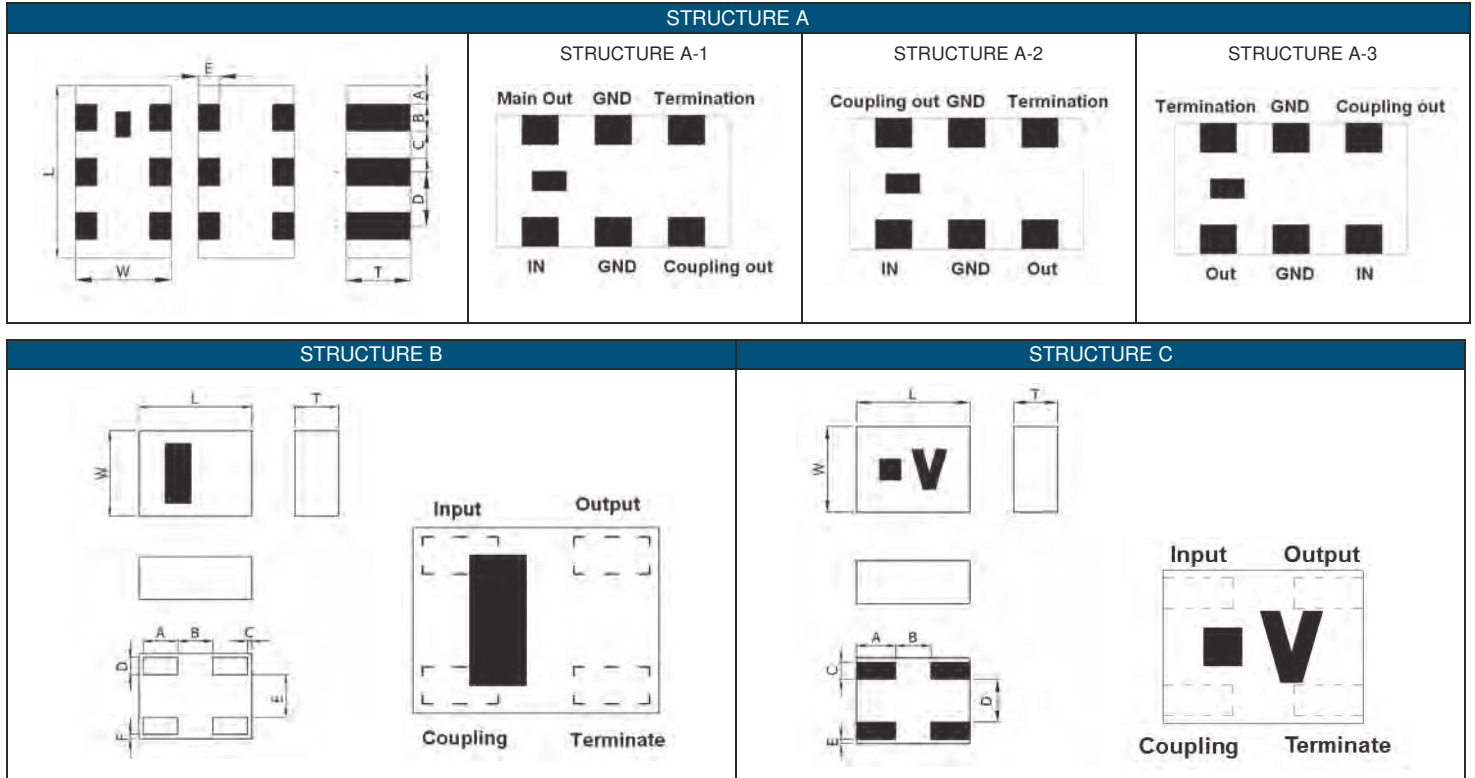

■ STRUCTURE AND DIMENSION

Unit: mm

| Structure\ Dimension | L         | W         | T         | A          | B         | C           | D         | E           | F           |
|----------------------|-----------|-----------|-----------|------------|-----------|-------------|-----------|-------------|-------------|
| A                    | 1.60±0.10 | 0.80±0.10 | 0.60±0.10 | 0.10±0.10  | 0.30±0.10 | 0.25±0.10   | 0.55±0.10 | 0.20±0.10   | -           |
|                      | 1.60±0.10 | 0.80±0.10 | 0.60±0.10 | 0.175±0.10 | 0.25±0.10 | 0.25±0.10   | 0.50±0.10 | 0.20±0.10   | -           |
| B                    | 0.65±0.04 | 0.50±0.04 | 0.35±0.10 | 0.20±0.04  | 0.20±0.04 | 0.025±0.025 | 0.10±0.04 | 0.25±0.04   | 0.025±0.025 |
| C                    | 0.65±0.10 | 0.50±0.10 | 0.35±0.05 | 0.225±0.10 | 0.20±0.05 | 0.10±0.05   | 0.25±0.05 | 0.025±0.025 | -           |

■ ELECTRICAL SPECIFICATION

ISM Band 2.4GHz Application

| Part Number        | Frequency (MHz) | Insertion Loss (dB)           | Coupling in BW | Directivity in BW dB (min.) | Isolation in BW dB (min.) | VSWR | Dimension (mm <sup>3</sup> ) | Structure |
|--------------------|-----------------|-------------------------------|----------------|-----------------------------|---------------------------|------|------------------------------|-----------|
| RFCPL1806B2450T    | 2400~2500       | 1.83                          | 6.5 ± 1.0 dB   | -                           | 21.0 dB min               | 1.5  | 1.60x1.80x0.60               | A-1       |
| RFCPL1810B2450T    | 2400~2500       | 0.74                          | 10.0 ±1.0 dB   | -                           | 22.0 dB min               | 1.8  | 1.60x1.80x0.60               | A-1       |
| TFCPL0605B24508Q1C | 2400~2500       | 0.32(25°C)<br>0.40(-40~+85°C) | 14.6 ± 1.0 dB  | 20.0 dB min.                | -                         | 1.3  | 0.60x0.50x0.35               | B         |

ISM Band 2.4/5GHz Application

| Part Number        | Frequency (MHz) | Insertion Loss (dB) | Coupling in BW | Directivity in BW dB (min.) | Isolation in BW dB (min.) | VSWR | Dimension (mm <sup>3</sup> ) | Structure |
|--------------------|-----------------|---------------------|----------------|-----------------------------|---------------------------|------|------------------------------|-----------|
| TFCPL0605030L18A1U | 2400~2500       | 0.5                 | 19.0±1.5dB     | 15 dB min.                  | -                         | 1.3  | 0.65x0.50x0.35               | B         |
|                    | 4900~5850       | 0.5                 | 12.5±1.5dB     | 15 dB min.                  | -                         | 1.3  |                              |           |
| TFCPL0605030L28Q1C | 2400~2500       | 0.2                 | 19.3±0.7dB     | 15 dB min.                  | -                         | 1.3  | 0.65x0.50x0.35               | B         |
|                    | 5150~5850       | 0.5                 | 13.0±1.5dB     | 15 dB min.                  | -                         | 1.3  |                              |           |
| RFCPL0605030L58Q1C | 2400~2500       | 0.3                 | 19.0±1.5dB     | 14.5 dB min.                | -                         | 1.3  | 0.65x0.50x0.35               | C         |
|                    | 4900~5850       | 0.6                 | 13.0±2.0dB     | 13.5dB min.                 | -                         | 1.8  |                              |           |


ISM Band 2.4/5GHz Application

| Part Number     | Frequency (MHz) | Insertion Loss (dB)           | Coupling in BW | Directivity in BW dB (min.) | Isolation in BW dB (min.) | VSWR | Dimension (mm <sup>3</sup> ) | Structure |
|-----------------|-----------------|-------------------------------|----------------|-----------------------------|---------------------------|------|------------------------------|-----------|
| RFCPL0605030L6T | 2400~2500       | 0.40(25°C)<br>0.45(-40~+85°C) | 21.5±1.5dB     | 15 dB min.                  | -                         | 1.3  | 0.65x0.50x0.35               | C         |
|                 | 4900~5850       | 0.40(25°C)<br>0.45(-40~+85°C) | 15.0±1.5dB     | 15 dB min.                  | -                         | 1.3  |                              |           |
| RFCPL0605030L9T | 2400~2500       | 0.20(25°C)<br>0.25(-40~+85°C) | 19.3±0.7dB     | 15 dB min.                  | -                         | 1.3  | 0.65x0.50x0.35               | C         |
|                 | 4900~5850       | 0.50(25°C)<br>0.55(-40~+85°C) | 13.0±1.5dB     | 15 dB min.                  | -                         | 1.3  |                              |           |
| RFCPL0605030LFT | 2400~2500       | 0.22(25°C)<br>0.24(-40~+85°C) | 21.5±1.0dB     | 14 dB min.                  | -                         | 1.3  | 0.65x0.50x0.35               | C         |
|                 | 4900~5850       | 0.32(25°C)<br>0.35(-40~+85°C) | 15.0±1.2dB     | 14 dB min.                  | -                         | 1.3  |                              |           |
| RFCPL0605030LHT | 2400~2500       | 0.40(25°C)<br>0.45(-40~+85°C) | 21.5±1.5dB     | 15 dB min.                  | -                         | 1.3  | 0.65x0.50x0.35               | C         |
|                 | 4900~5850       | 0.40(25°C)<br>0.45(-40~+85°C) | 15.0±1.5dB     | 15 dB min.                  | -                         | 1.3  |                              |           |

LTE BAND APPLICATION



| Part Number        | Frequency (MHz) | Insertion Loss (dB)  | Coupling in BW   | Directivity in BW dB (min.) | Isolation in BW dB (min.)  | VSWR | Dimension (mm <sup>3</sup> ) | Structure |
|--------------------|-----------------|--|--|-----------------------------|--|------|------------------------------|-----------|
| RFCPL1608070P08Q1C | 698~2690        | 0.20(698~960MHz)<br>0.22(1427.9~2170MHz)<br>0.25(2300~2690MHz)   | 23.0~27.0(698~915MHz)<br>21.5~26.5(1427.9~2025MHz)<br>22.5~27.5(2300~2620MHz)        | 20.                         | -  | 1.5  | 1.60x1.80x0.60               | A-2       |
| RFCPL1608070P28Q1C | 698~2690        | 0.20(698~960MHz)<br>0.22(1427.9~2170MHz)<br>0.25(2300~2690MHz)   | 23.0~27.0(698~915MHz)<br>21.5~26.5(1427.9~2025MHz)<br>22.5~27.5(2300~2620MHz)        | 20                          | -  | 1.5  | 1.60x1.80x0.60               | A-2       |
| RFCPL1608070P38Q1C | 698~2690        | 0.20(698~960MHz)<br>0.22(1710~2170MHz)<br>0.25(2300~2690MHz)   | 23.0~27.0(698~915MHz)<br>21.5~26.5(1710~2025MHz)<br>22.5~27.5(2300~2620MHz)          | 20                          | -  | 1.45 | 1.60x1.80x0.60               | A-3       |
| RFCPL1608070PM9T16 | 700~2700        | 0.2(700~790MHz)<br>(Typ.0.07)<br>0.2(820~900MHz)<br>(Typ.0.07)<br>0.3(1701~2100MHz)<br>(Typ.0.15)<br>0.3(2300~2700MHz)<br>(Typ.0.15) | 24~27(700~790MHz)<br>24~27(820~900MHz)<br>20~23(1701~2100MHz)<br>20~23(2300~2700MHz) | -                           | 40(700~790MHz)<br>40(820~900MHz)<br>35(1701~2100MHz)<br>)<br>35(2300~2700MHz)<br>) | 1.45 | 1.60x1.80x0.60               | A-1       |

■ TYPICAL ELECTRICAL CHARACTERISTICS



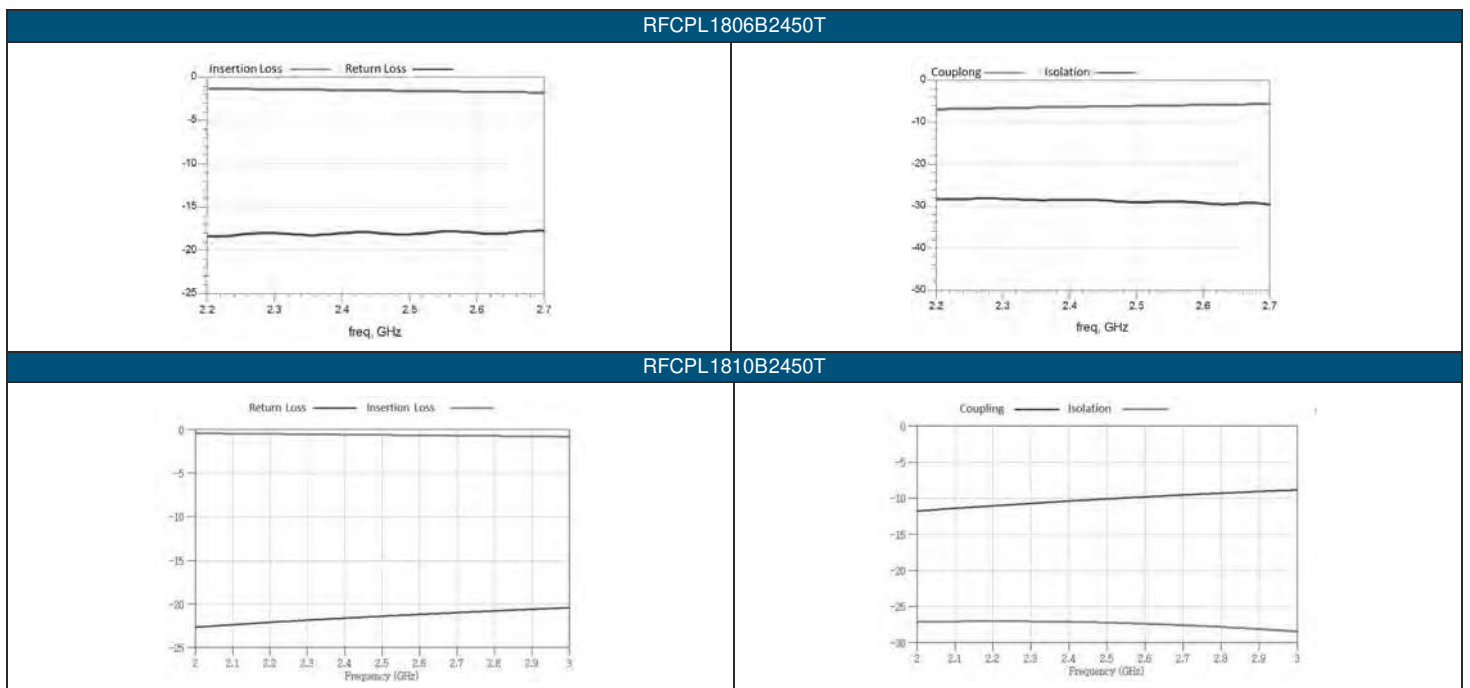


TYPICAL ELECTRICAL CHARACTERISTICS




TFCPL0605B24508Q1C

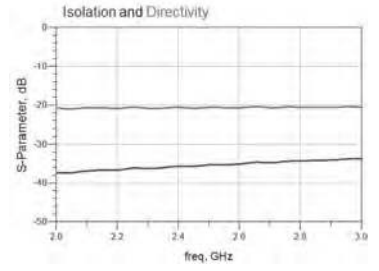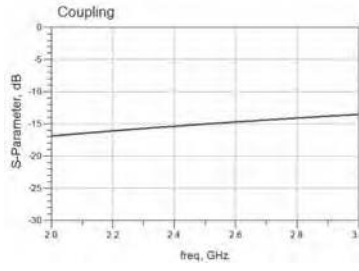




FCPL0605030L28Q1C

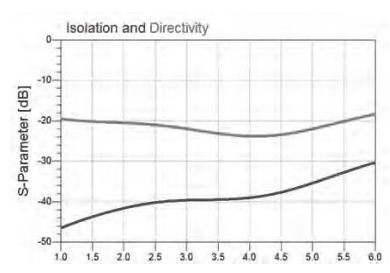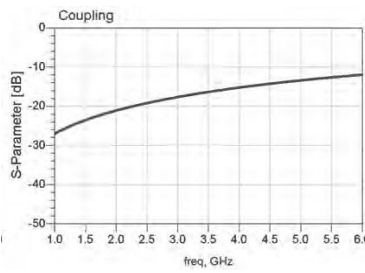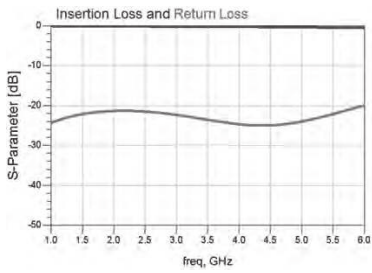




TFCPL0605030L28Q1C

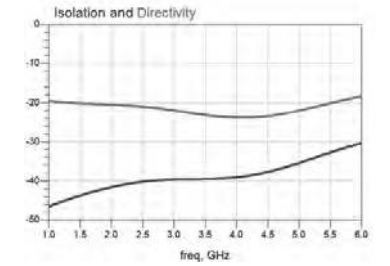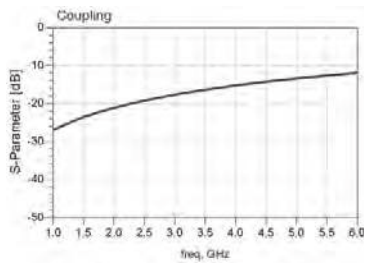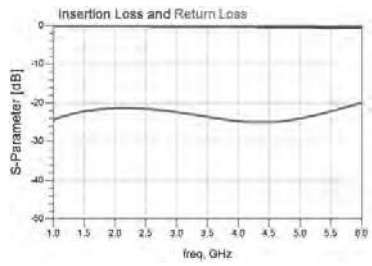

RFCL0605030L58Q1C

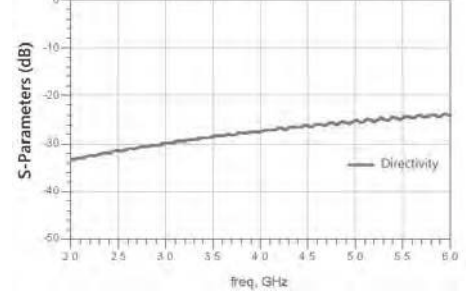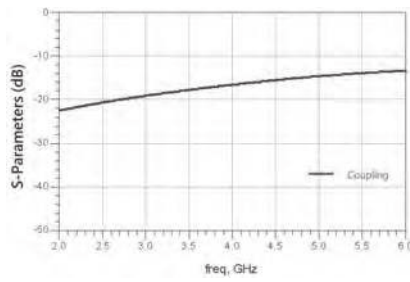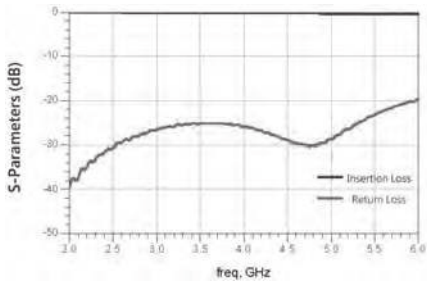


RFCL0605030L6T

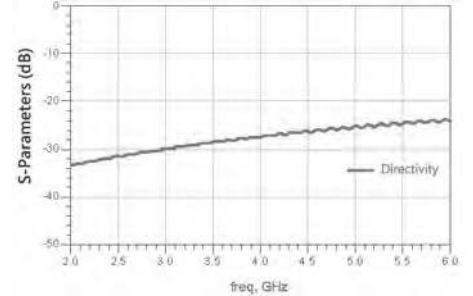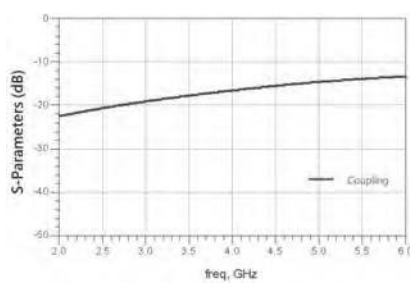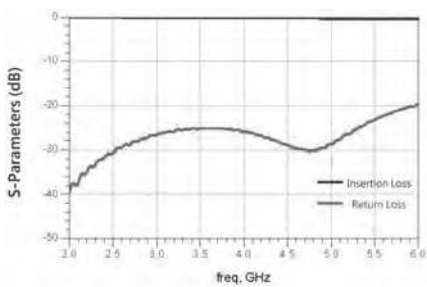


TYPICAL ELECTRICAL CHARACTERISTICS


RFCPL0605030L9T

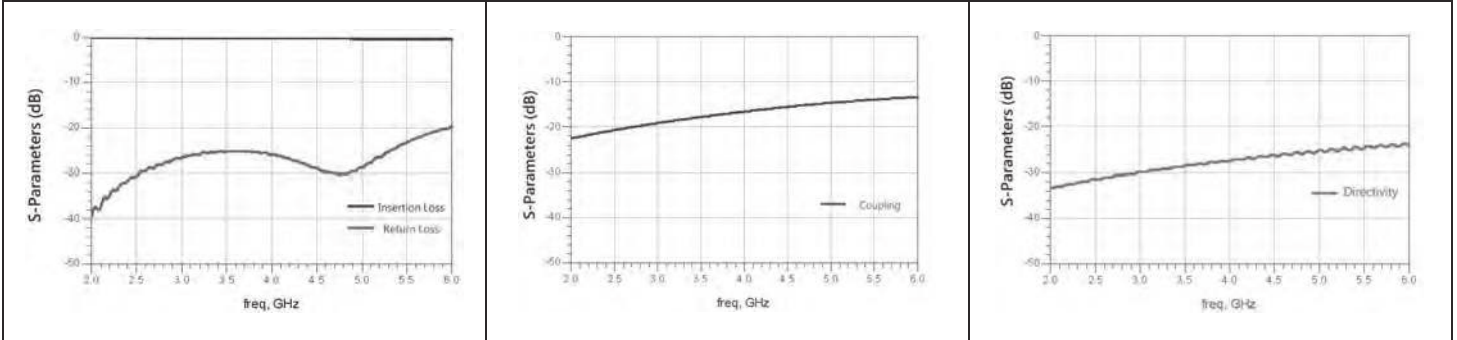


RFCPL0605030LFT

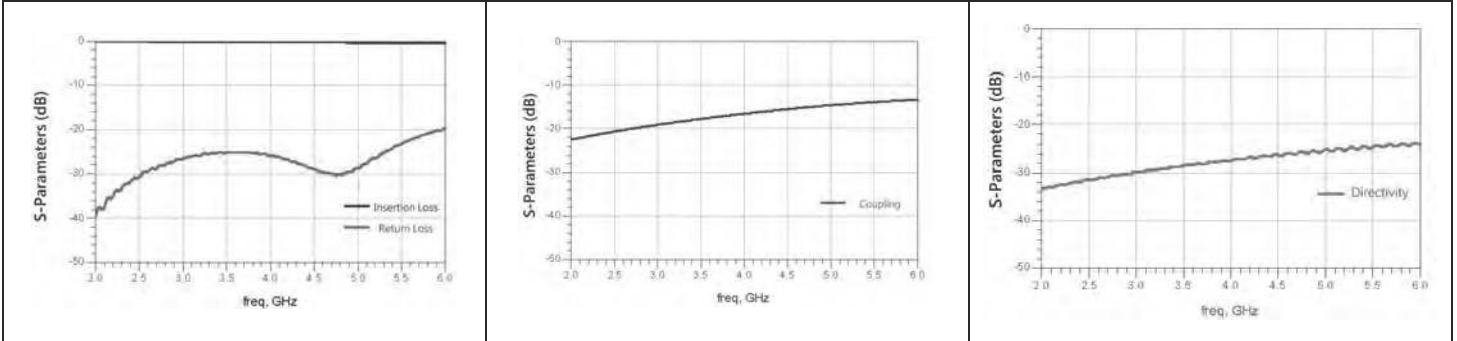


RFCPL0605030LHT

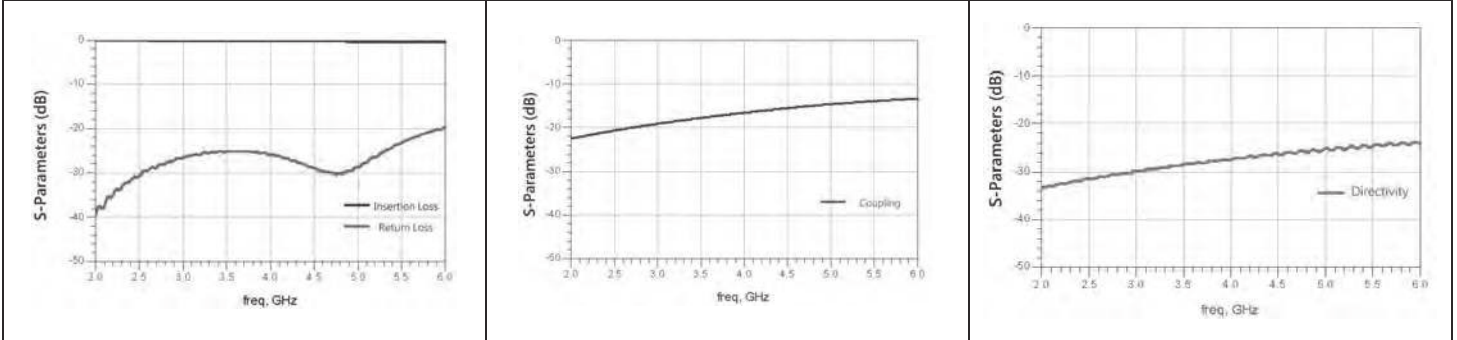

RFCL1608070P08Q1C


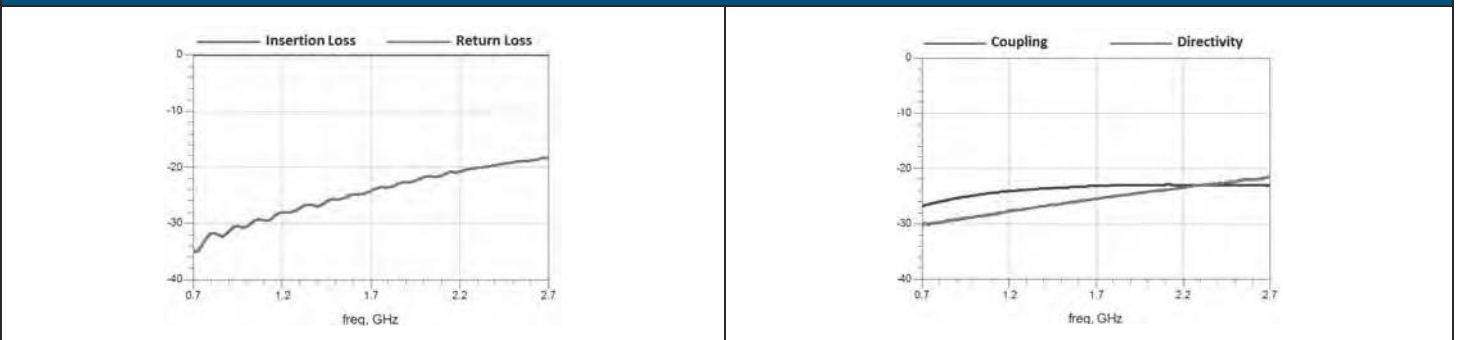


RFCL1608070P28Q1C


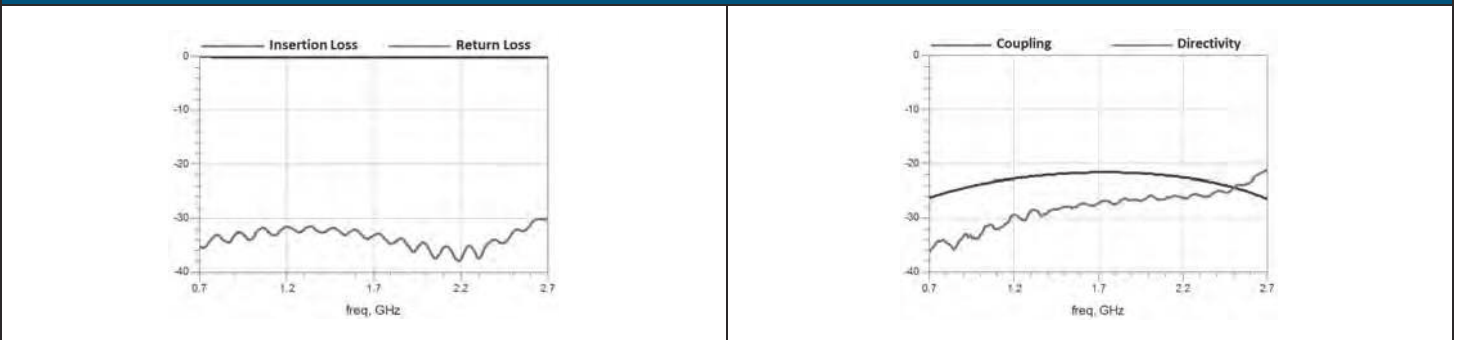


TYPICAL ELECTRICAL CHARACTERISTICS



RFCPL1608070P38Q1C

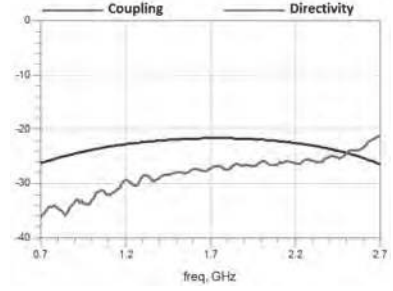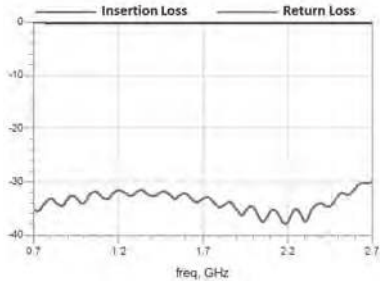



RFCPL1608070PHT

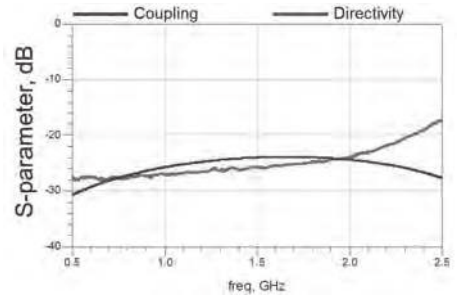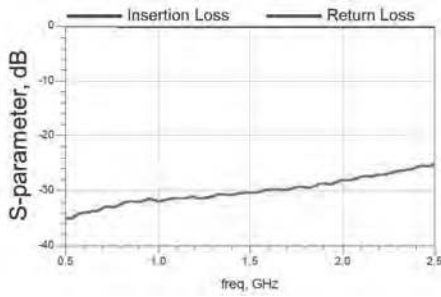

RFCPL1608070PKT

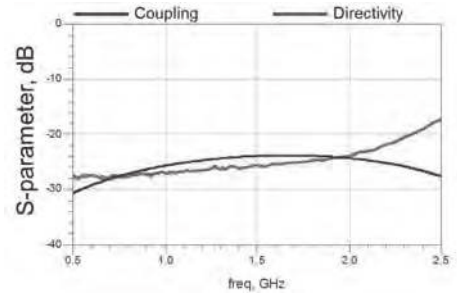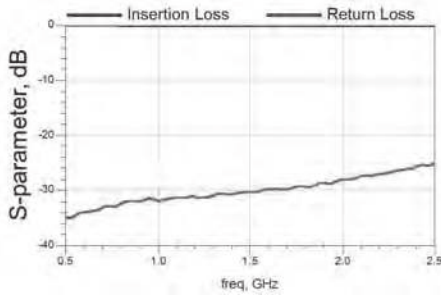


RFCPL1608070PM9T16

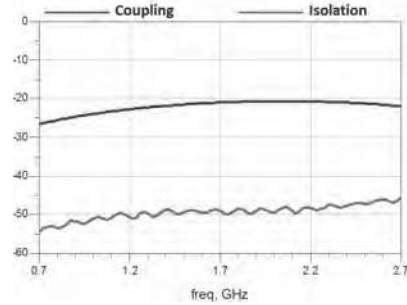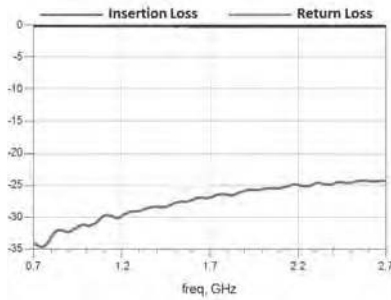

- For more information, please contact with local sales representative
- All specifications are subject to change without notice

SAW Filter

■ STRUCTURE AND PIN ASSOCIATED

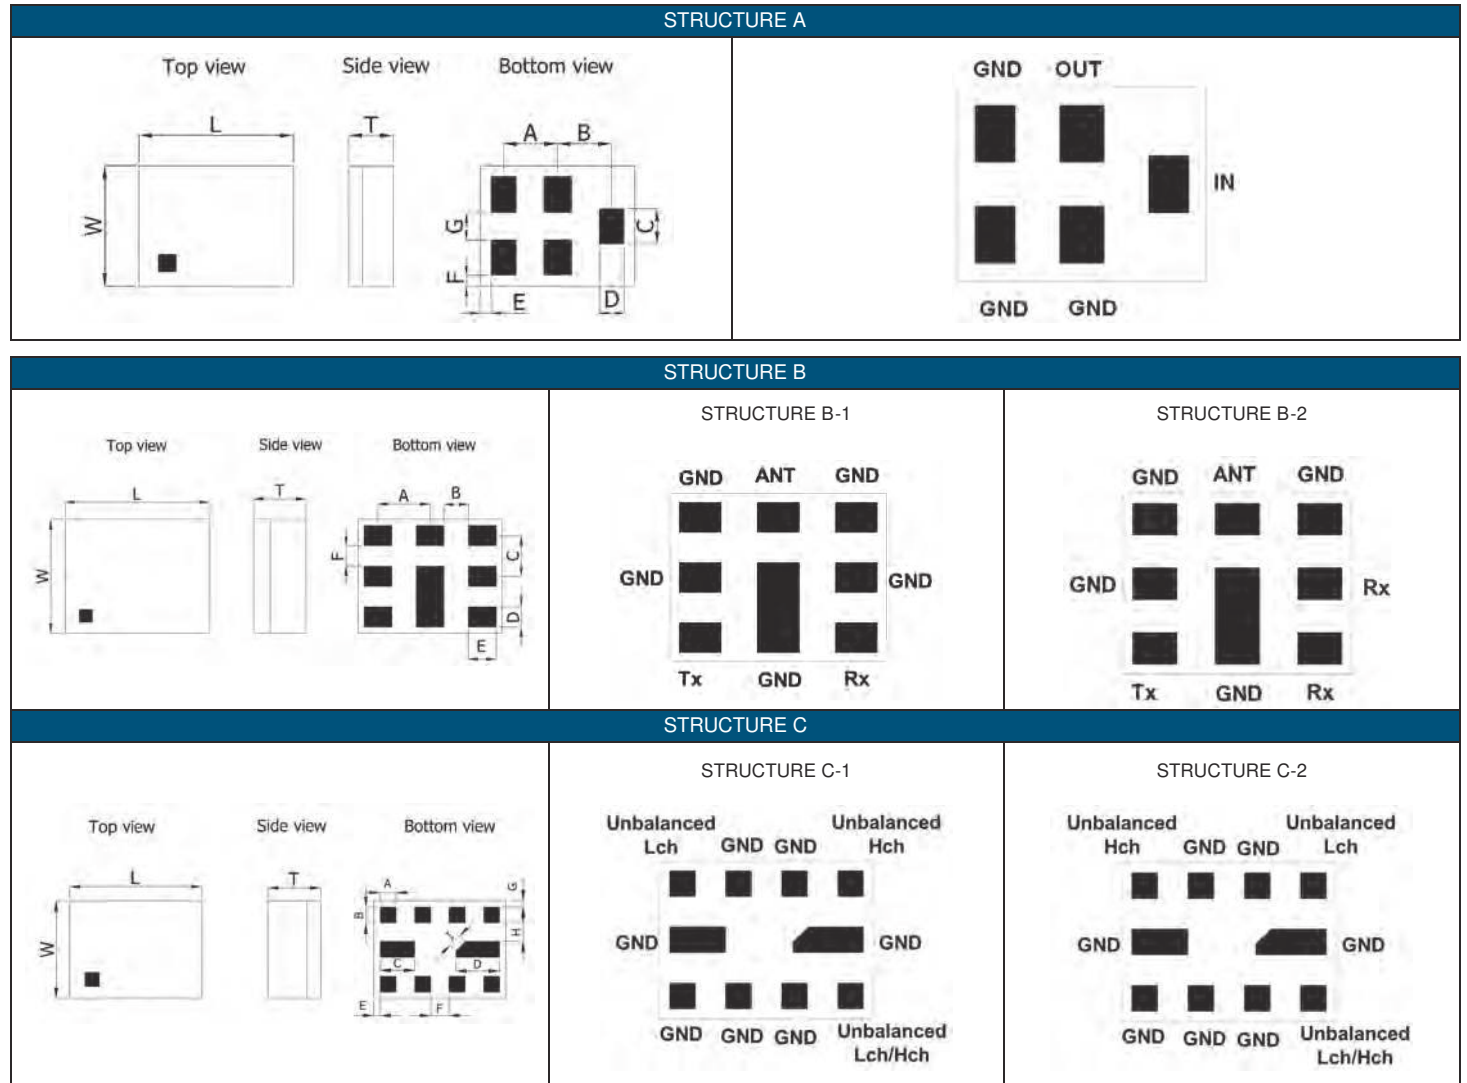

■ STRUCTURE AND DIMENSION

Unit: mm

| Structure\ Dimension | L         | W         | T        | A    | B    | C     | D    | E     | F     | G    | H    | I    |
|----------------------|-----------|-----------|----------|------|------|-------|------|-------|-------|------|------|------|
| A                    | 1.10±0.10 | 0.90±0.10 | 0.50max. | 0.40 | 0.40 | 0.25  | 0.20 | 0.05  | 0.075 | 0.25 | -    | -    |
|                      | 1.40±0.13 | 1.10±0.13 | 0.65max. | 0.50 | 0.50 | 0.325 | 0.25 | 0.075 | 0.10  | 0.25 | -    | -    |
| B                    | 1.80±0.10 | 1.40±0.10 | 0.65max. | 0.65 | 0.30 | 0.50  | 0.25 | 0.35  | 0.25  | -    | -    | -    |
| C                    | 1.50±0.10 | 1.10±0.10 | 0.60max. | 0.18 | 0.18 | 0.39  | 0.49 | 0.075 | 0.21  | 0.07 | 0.21 | 0.15 |




■ ELECTRICAL SPECIFICATION

| Application | Type           | Part Number      | Band    | Frequency(MHz)                  | Package (mm) | STRUCTURE |
|-------------|----------------|------------------|---------|---------------------------------|--------------|-----------|
| GPS/Wifi    | GPS SAW 3 Mode | SF11091582GC2T   | GPS+G+C | 1559.05~1605.89                 | 1.1 x 0.9    | A         |
|             | GPS SAW 3 Mode | SF14111582GC01T  | GPS+G+C | 1559.05~1605.66                 | 1.4 x 1.1    | A         |
|             | SAW            | SF11092450A04T   | WLAN    | 2400~2500                       | 1.1 x 0.9    | A         |
|             | SAW            | SF14112450A03T   | WLAN    | 2400~2500                       | 1.4 x 1.1    | A         |
|             | SAW            | SF14112442A01T   | WLAN    | 2400~2484                       | 1.4 x 1.1    | A         |
|             | SAW            | SF14112442A03T   | WLAN    | 2401~2483                       | 1.4 x 1.1    | A         |
| FDD LTE     | SAW Duplexer   | DF18141950B104T  | B1      | 1920~1980/2110~2170             | 1.8 x 1.4    | B-1       |
|             | SAW Duplexer   | DF18140836B511T  | B5      | 824~849/869~894                 | 1.8 x 1.4    | B-1       |
|             | SAW Duplexer   | DF18141880B203T  | B2      | 1850.48~1909.52/1930.48~1989.52 | 1.8 x 1.4    | B-1       |
|             | SAW Duplexer   | DF18141747B303T  | B3      | 1712.5~1782.5/1807.5~1877.5     | 1.8 x 1.4    | B-1       |
|             | SAW Duplexer   | DF18142535B705T  | B7      | 2500~2570/2620~2690             | 1.8 x 1.4    | B-1       |
|             | SAW Duplexer   | DB18142140B102T  | B1      | 1920~1980/2110~2170             | 1.8 x 1.4    | B-2       |
|             | SAW Duplexer   | DB18140881B507T  | B5      | 824~849/869~894                 | 1.8 x 1.4    | B-2       |
|             | SAW Duplexer   | DB18140942B801T  | B8      | 880~915/925~960                 | 1.8 x 1.4    | B-2       |
| FDD LTE     | RX SAW         | SF11092140B102T  | B1      | 2110~2170                       | 1.1 x 0.9    | A         |
|             | RX SAW         | SF11091960B201T  | B2      | 1930~1990                       | 1.1 x 0.9    | A         |
|             | RX SAW         | SF11091842B305T  | B3      | 1805~1880                       | 1.1 x 0.9    | A         |
|             | RX SAW         | SF11090881B506T  | B5      | 869~894                         | 1.1 x 0.9    | A         |
|             | RX SAW         | SF11092655B702T  | B7      | 2620~2690                       | 1.1 x 0.9    | A         |
|             | RX SAW         | SF11090942B805T  | B8      | 925~960                         | 1.1 x 0.9    | A         |
| TDD LTE     | Rx Dual SAW    | BF1511B394101AT  | B39/B41 | 1880~1920/2550~2655             | 1.5 x 1.1    | C-2       |
|             | Rx Dual SAW    | BF1511B394101BT  | B39/B41 | 1880~1920/2550~2655             | 1.5 x 1.1    | C-1       |
| TDD LTE     | TRx SAW        | SF14112595B3803T | B38     | 2570~2620                       | 1.4 x 1.1    | A         |
|             | TRx SAW        | SF14112350B4001T | B40     | 2300~2400                       | 1.4 x 1.1    | A         |
|             | TRx SAW        | SF14112605B41S4T | B41     | 2550~2655                       | 1.4 x 1.1    | A         |
|             | TRx SAW        | SF14112593B4102T | B41     | 2496~2690                       | 1.4 x 1.1    | A         |
|             | TRx SAW        | SF14112017B3402T | B34     | 2010~2025                       | 1.4 x 1.1    | A         |
|             | TRx SAW        | SF14111900B3906T | B39     | 1880~1920                       | 1.4 x 1.1    | A         |
|             | TRx SAW        | SF11092595B3804T | B38     | 2570~2620                       | 1.1 x 0.9    | A         |
|             | TRx SAW        | SF11092350B4004T | B40     | 2300~2400                       | 1.1 x 0.9    | A         |
|             | TRx SAW        | SF11092595B4108T | B41     | 2535~2655                       | 1.1 x 0.9    | A         |
|             | TRx SAW        | SF11092017B3403T | B34     | 2010~2025                       | 1.1 x 0.9    | A         |
|             | TRx SAW        | SF11091900B3907T | B39     | 1880~1920                       | 1.1 x 0.9    | A         |
| TDD LTE     | Rx SAW         | SF11092595B3805T | B38     | 2570~2620                       | 1.1 x 0.9    | A         |
|             | Rx SAW         | SF11092350B4005T | B40     | 2300~2400                       | 1.1 x 0.9    | A         |
|             | Rx SAW         | SF11092602B41W9T | B41     | 2550~2655                       | 1.1 x 0.9    | A         |



■ TYPICAL ELECTRICAL CHARACTERISTICS

SF11091582GC2T


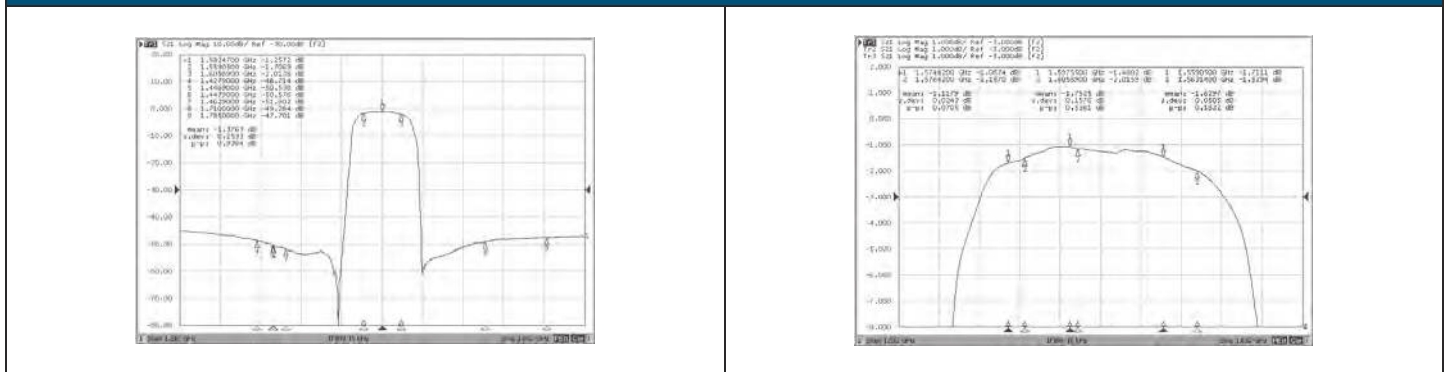


TYPICAL ELECTRICAL CHARACTERISTICS


SF14111582GC01T

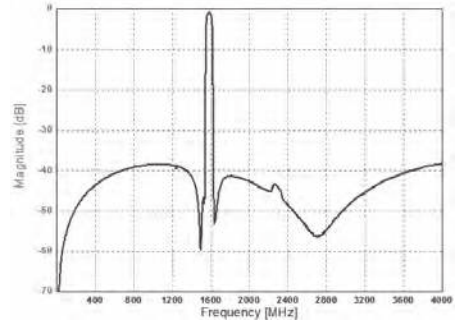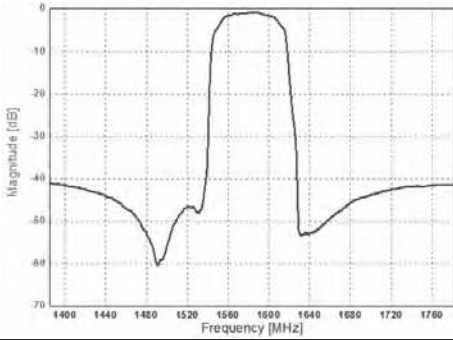



SF11092450A04T

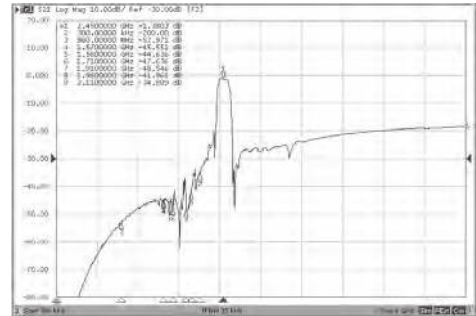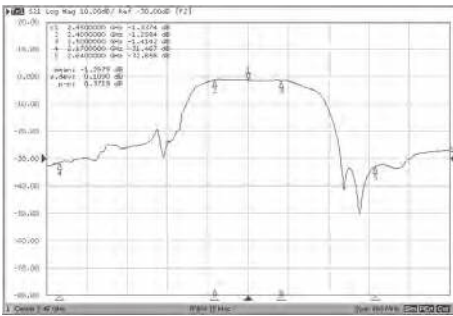



SF14112450A03T

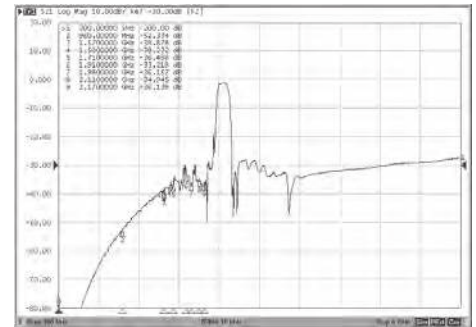

SF14112442A01T

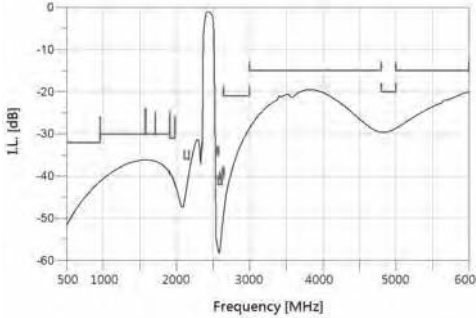
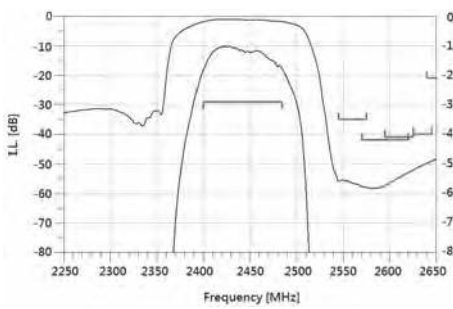


SF14112442A03T

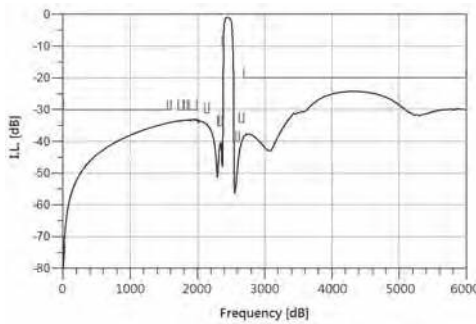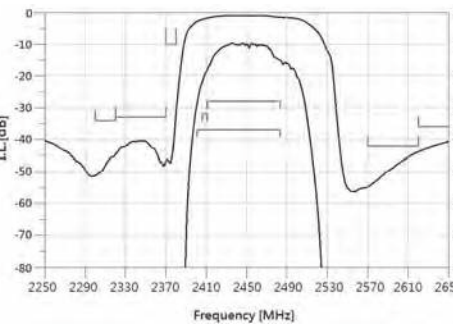


TYPICAL ELECTRICAL CHARACTERISTICS



DF18141950B104T

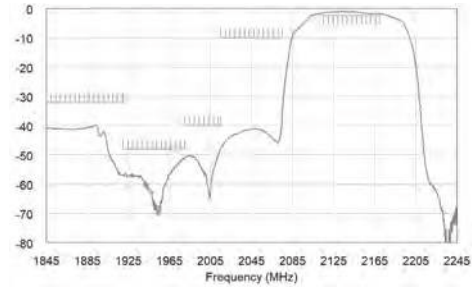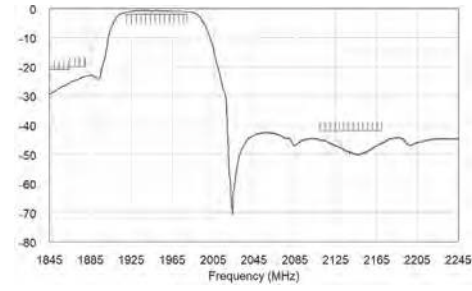


DF18140836B511T

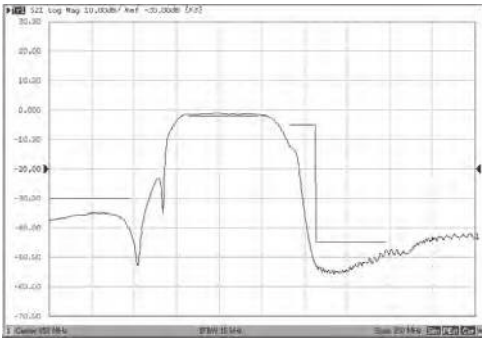



DF18141880B203T

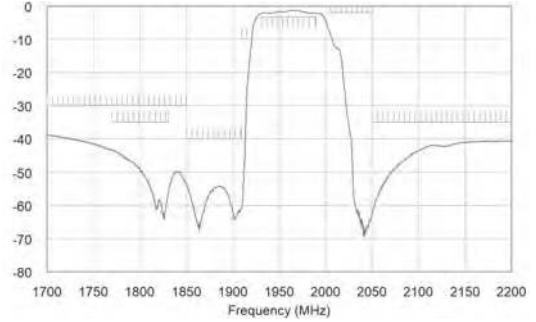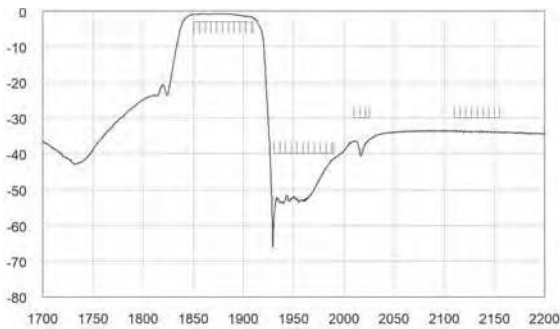

DF18141747B303T

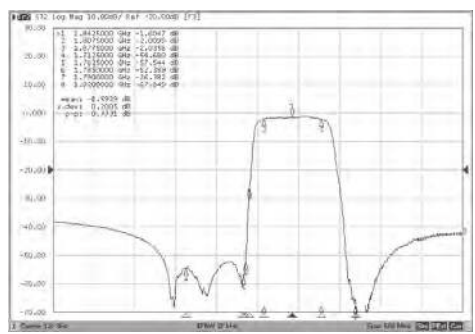



DF18142535B705T

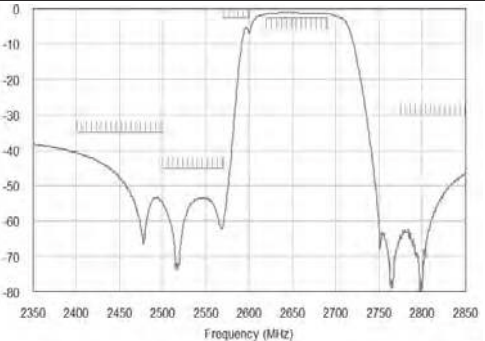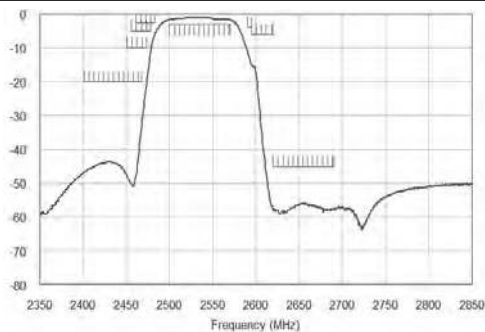





TYPICAL ELECTRICAL CHARACTERISTICS


SF11091842B305T

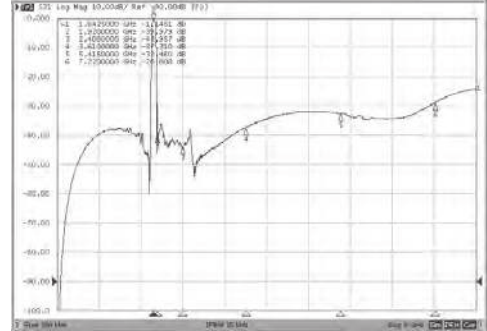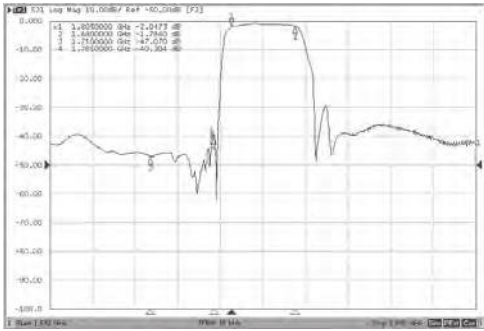



SF11090881B506T

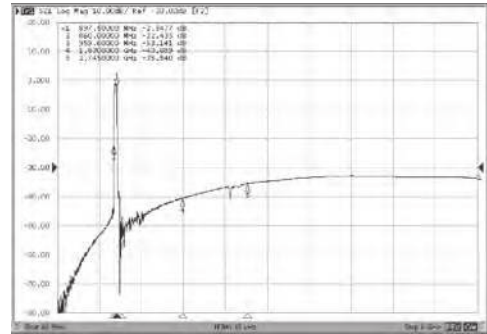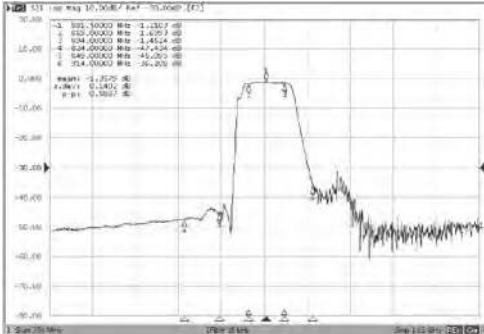



SF11092655B702T

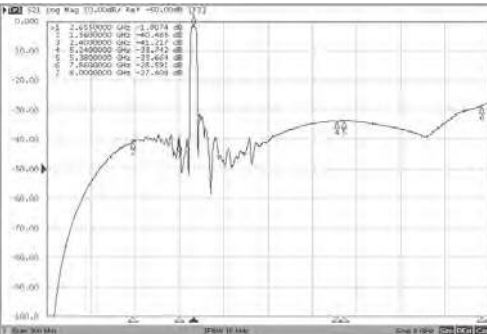

SF11090942B805T

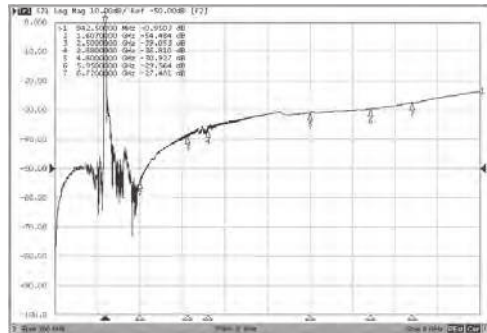
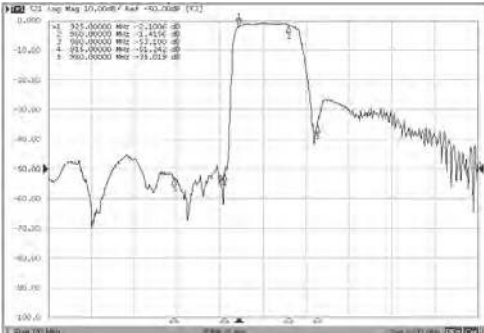


SF14112595B3803T

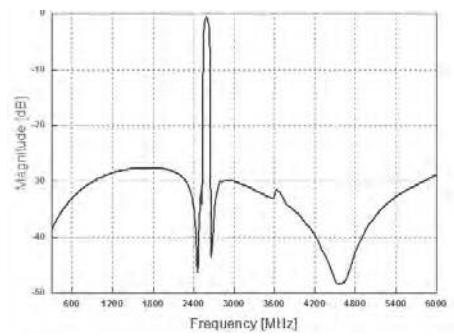
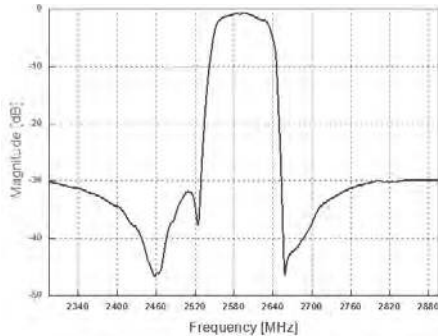


TYPICAL ELECTRICAL CHARACTERISTICS



SF14112350B4001T

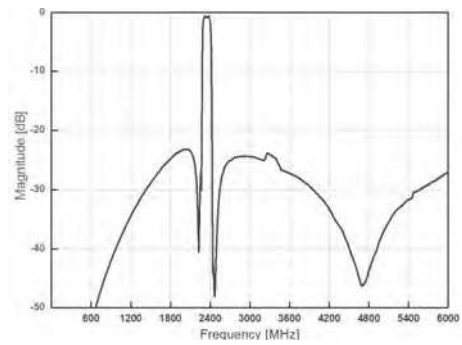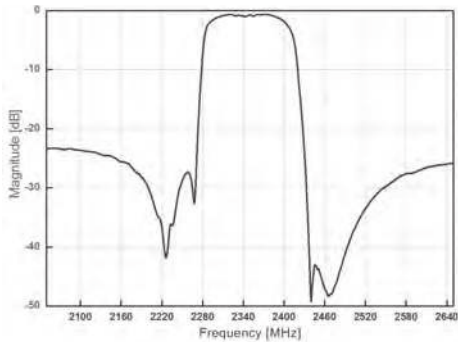



SF14112605B41S4T

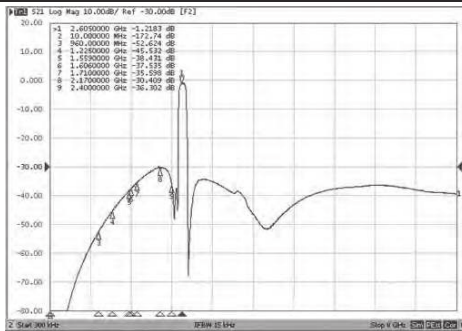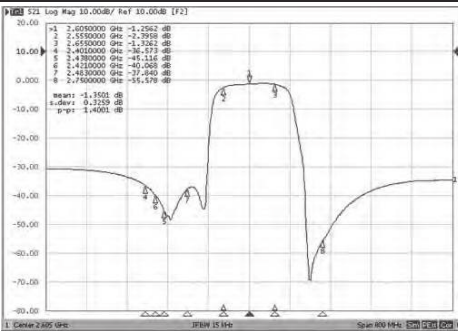



SF14112593B4102T

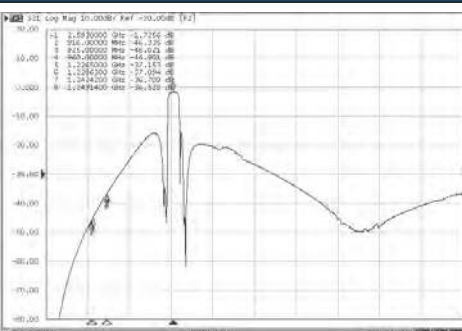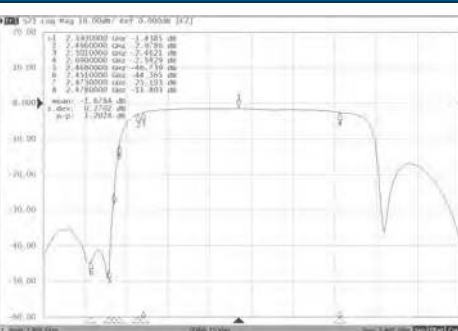

SF14112017B3402T

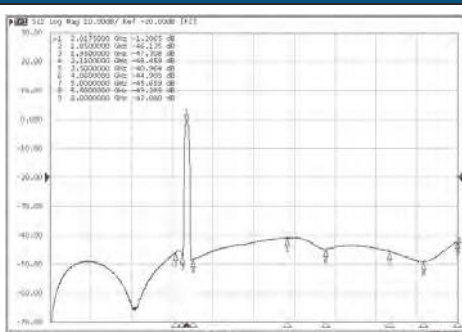
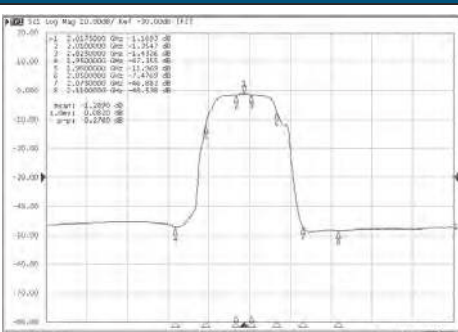


SF14111900B3906T

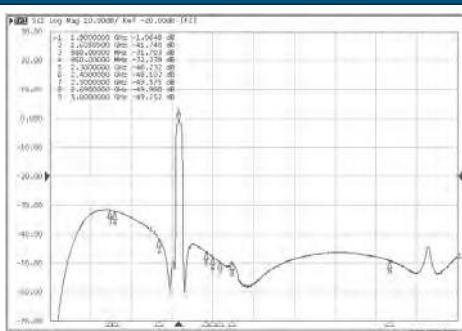
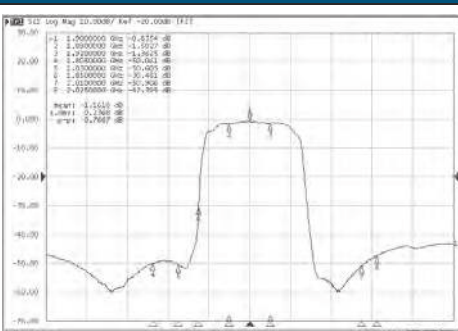


TYPICAL ELECTRICAL CHARACTERISTICS



SF11092595B3804T

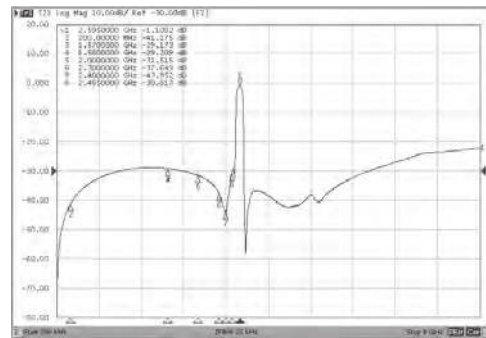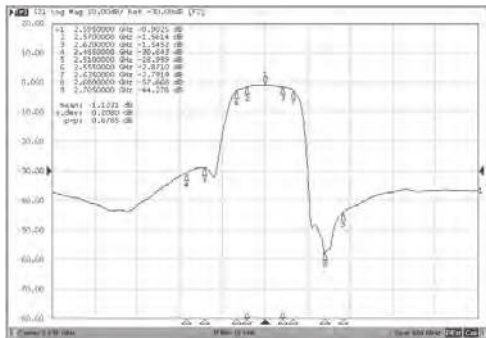



SF11092350B4004T

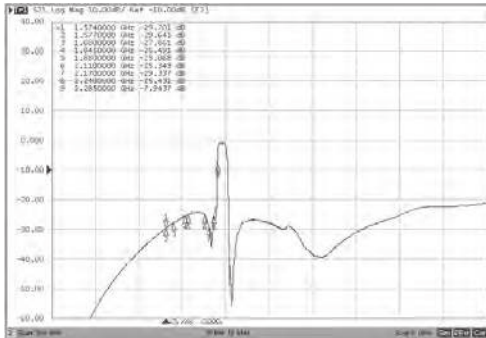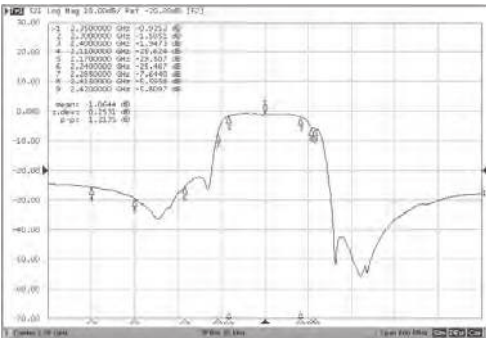



SF11092595B4108T

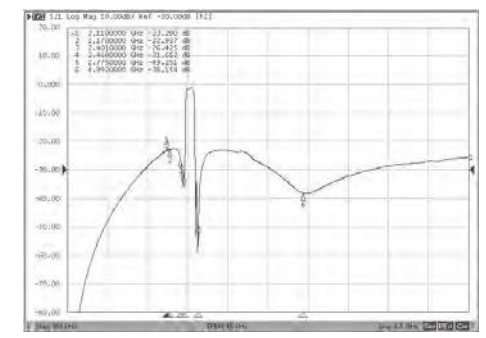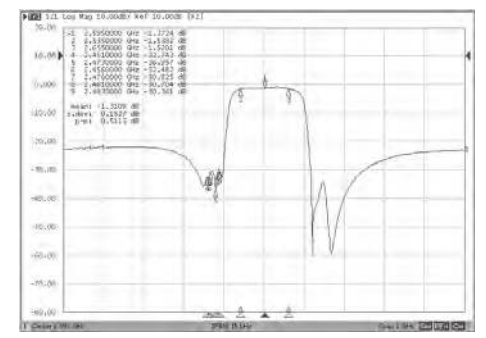

SF11092017B3403T

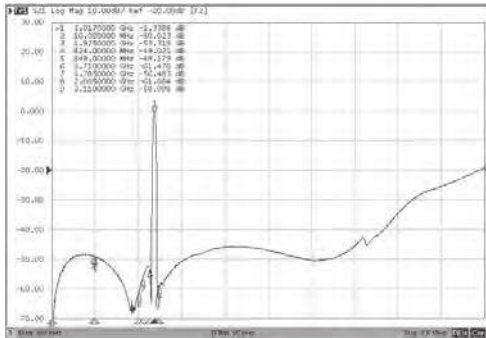
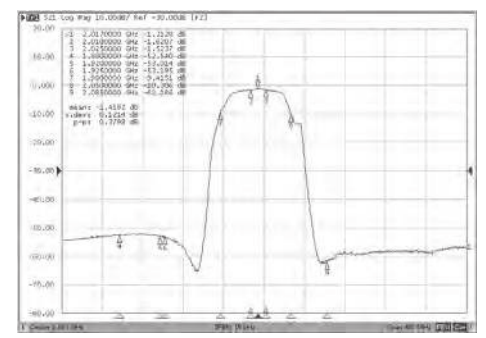


SF11091900B3907T

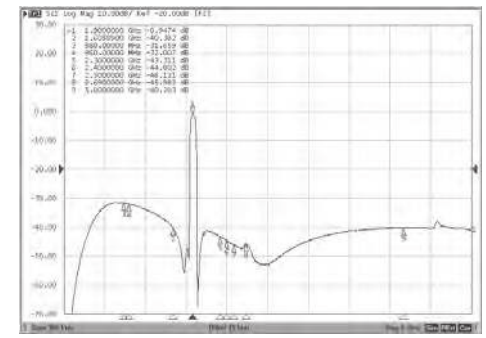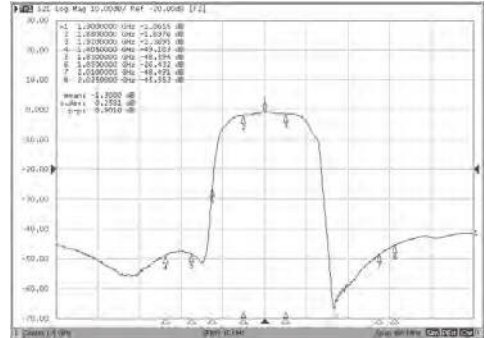


TYPICAL ELECTRICAL CHARACTERISTICS



SF11092595B3805T

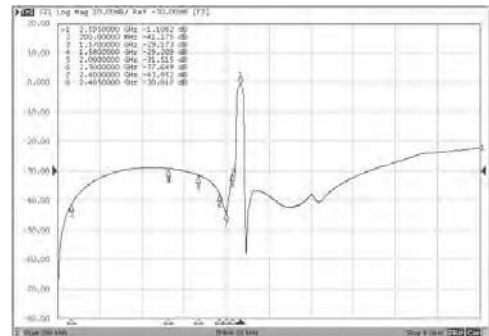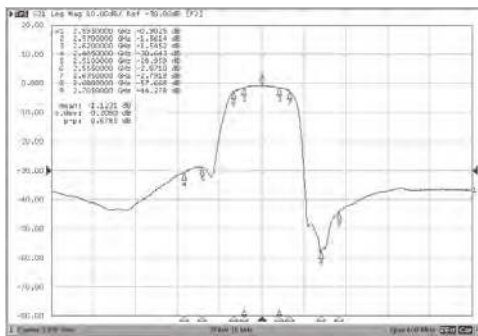

SF11092350B4005T

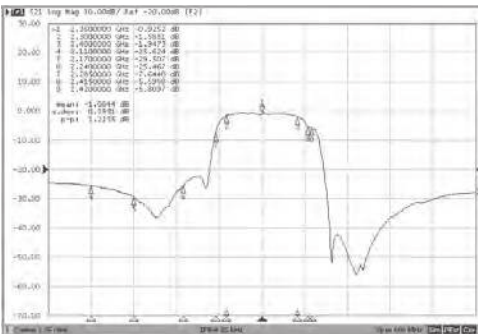

SF11092602B41W9T

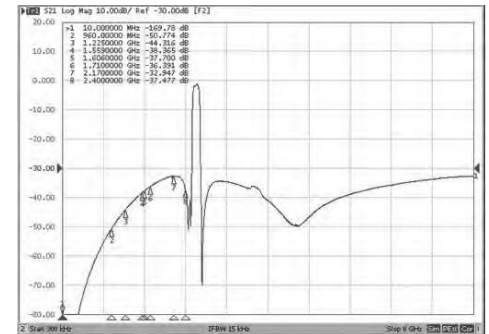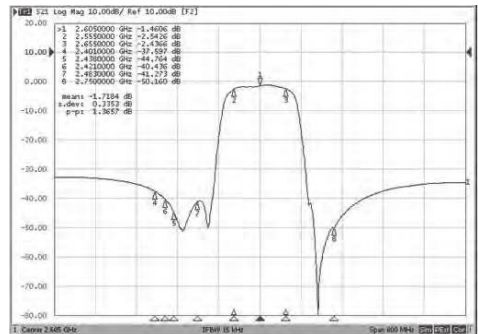

- For more information, please contact with local sales representative
- All specifications are subject to change without notice




ANTENNA SWITCH

■ Application Circuit (GPIO)

|                                     |                                     |                                     |
|-------------------------------------|-------------------------------------|-------------------------------------|
| <p>RFASWA630PTF06</p> <p>SPDT</p>   | <p>RFASWA697ATF09</p> <p>SPDT</p>   | <p>RFASWAM3489ATF09</p> <p>SPDT</p> |
|                                     |                                     |                                     |
| <p>RFASWMT2628PTF09</p> <p>SP3T</p> | <p>RFASWMT2628BTF09</p> <p>SP3T</p> | <p>RFASWMH6373ATF09</p> <p>SP3T</p> |
|                                     |                                     |                                     |
| <p>RFASWKH4414PTF06</p> <p>SP4T</p> | <p>RFASWK626ATF09</p> <p>SP4T</p>   | <p>RFASWHH1416PTF06</p> <p>SP6T</p> |
|                                     |                                     |                                     |
| <p>RFASWDH2418PTF06</p> <p>SP8T</p> |                                     |                                     |
|                                     |                                     |                                     |

ANTENNA SWITCH

■ Application Circuit (GPIO)

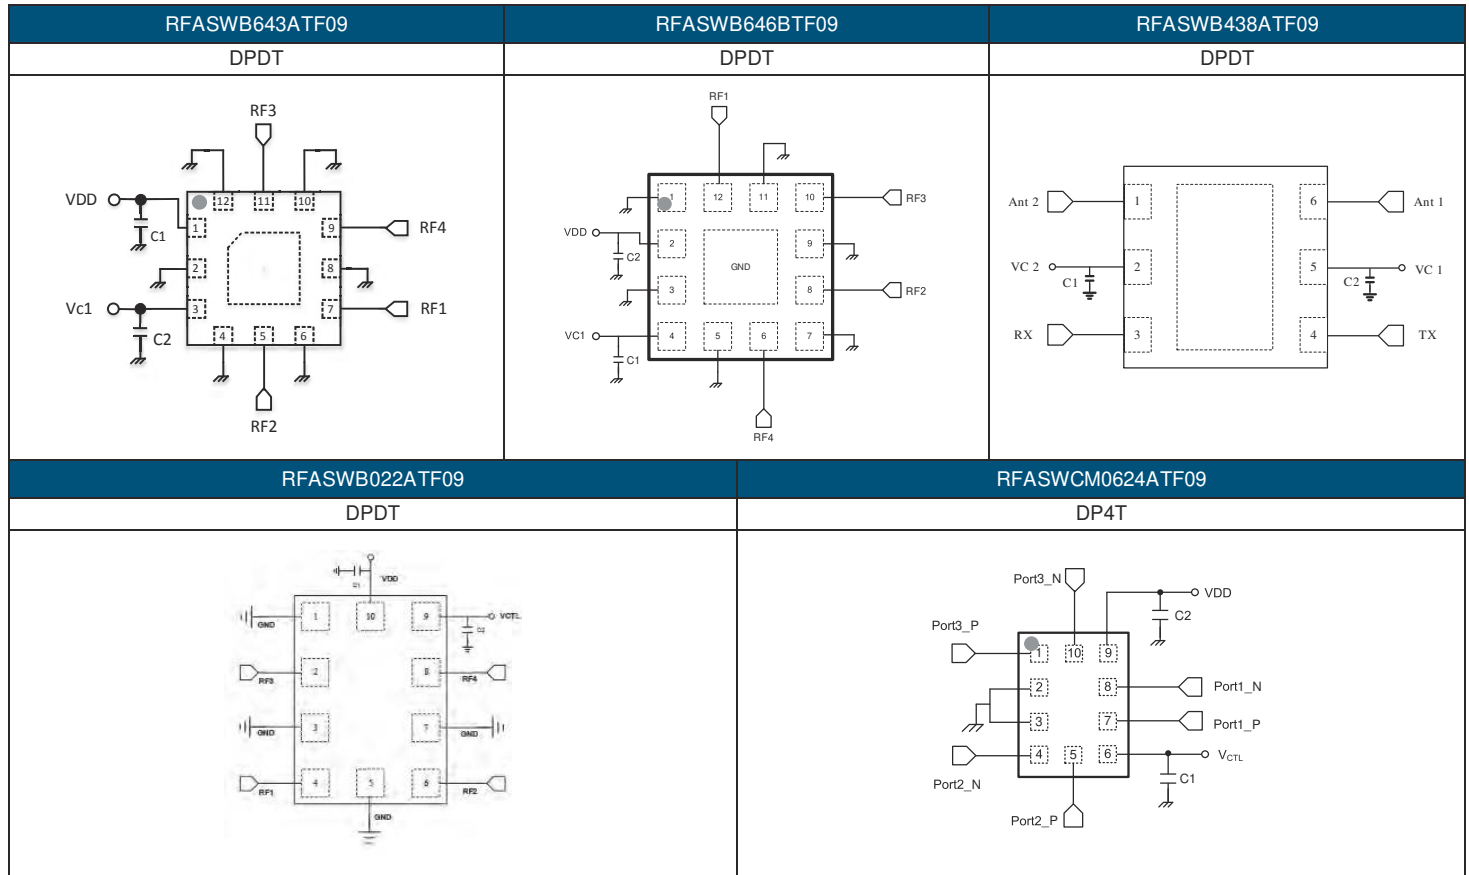

■ ELECTRICAL SPECIFICATION

| Part Number       | Description | Frequency (GHz )Min. | Frequency (GHz )Max. | Insertion loss | Isolation | VSWR | Package (mm) |
|-------------------|-------------|----------------------|----------------------|----------------|-----------|------|--------------|
|                   |             |                      |                      | (dB)           | (dB)      |      |              |
| RFASWA630PTF06    | SPDT        | 0.1                  | 6                    | 0.25~1.1dB     | 14~35     | 1.20 | 1.1 x 0.7    |
| RFASWA697ATF09    |             | 0.4                  | 6                    | 0.35~1.00dB    | 15~32     | 1.50 | 1.0 x 1.0    |
| RFASWAM3489ATF09  |             | 0.7                  | 2.7                  | 0.38~0.50dB    | 21~33     | 1.25 | 1.1 x 0.7    |
| RFASWMT2628PTF09  | SP3T        | 0.5                  | 2.7                  | 0.30~0.60dB    | 20~35     | 1.43 | 1.0 x 1.0    |
| RFASWMT2628BTF09  |             | 0.8                  | 2.7                  | 0.30~0.70dB    | 14~26     | 1.50 | 1.0 x 1.0    |
| RFASWMMH6373ATF09 |             | 0.5                  | 6                    | 0.32~0.80dB    | 15~32     | 1.40 | 2.0 x 2.0    |
| RFASWKH4414PTF06  | SP4T        | 0.1                  | 2.7                  | 0.45~0.65dB    | 24~38     | 1.22 | 2.0 x 2.0    |
| RFASWK626ATF09    |             | 0.7                  | 2.7                  | 0.30~0.50dB    | 27~38     | 1.60 | 1.1 x 1.1    |
| RFASWHH1416PTF06  | SP6T        | 0.1                  | 2.7                  | 0.4~0.65dB     | 24~38     | 1.22 | 2.0 x 2.0    |
| RFASWDH2418PTF06  | SP8T        | 0.1                  | 2.7                  | 0.30~0.80dB    | 18~35     | 1.50 | 2.0 x 2.0    |
| RFASWB643ATF09    | DPDT        | 0.7                  | 2.7                  | 0.40~0.55dB    | 22~30     | 1.28 | 2.0 x 2.0    |
| RFASWB646BTF09    |             | 0.7                  | 3.8                  | 0.40~0.70dB    | 25~33     | 1.20 | 1.83 x 1.83  |
| RFASWB438ATF09    |             | 0.1                  | 6                    | 0.50~1.20dB    | 13~28     | 1.43 | 1.5 x 1.5    |
| RFASWB022ATF09    |             | 0.6                  | 6                    | 0.40~1.05dB    | 16~33     | 1.30 | 1.1 x 1.5    |
| RFASWCM0624ATF09  | DP4T        | 0.824                | 0.96                 | 0.25dB         | 28~38     | 1.50 | 1.1 x 1.5    |
|                   |             | 1.71                 | 2.17                 | 0.35dB         | 23~30     | 1.50 |              |
|                   |             | 0.698                | 0.792                | 0.25dB         | 28~38     | 1.50 |              |
|                   |             | 2.3                  | 2.69                 | 0.40dB         | 20~24     | 1.50 |              |


■ Application Circuit (MIPI)

| RFASWH526BTF03                                 | RFASWH656FTF03                                 | RFASWD658FTF03                                  |
|--|--|---|
| <p>SP6T</p>                                    | <p>SP6T</p>                                    | <p>SP8T</p>                                     |
| <p>RMASME494ATF03</p> <p>SP10T</p>             | <p>RFASWE660DTF03</p> <p>SP10T</p>             | <p>RFASWF662DTF03</p> <p>SP12T</p>              |
| <p>RMASMF496ATF03</p> <p>SP12T</p>             | <p>RMASMP491ATF03</p> <p>SP14T</p>             | <p>RMASMNT1492ATF03</p> <p>SP16T</p>            |
| <p>RMASMU532ATF03</p> <p>DP14T (SP8T+SP6T)</p> | <p>RMASMU890ATF03</p> <p>DP14T (SP7T+SP7T)</p> | <p>RMASMS535ATF03</p> <p>DP21T (SP12T+SP9T)</p> |

■ ELECTRICAL SPECIFICATION

| Part Number      | Description        | Frequency (GHz) Min. | Frequency (GHz) Max. | Insertion loss (dB) TRXx ports | Isolation (TRXx to any off TRXx port) [non-adjacent ports] | Isolation (TRXx to any off TRXx port) [adjacent ports] | VSWR | Package (mm) |
|------------------|--------------------|----------------------|----------------------|--------------------------------|--|--|------|--------------|
| RFASWH526BTF03   | SP6T               | 0.4                  | 2.7                  | 0.40~0.76dB(400~2690MHz)       | 20~30  | 17~26  | 2    | 2.0 x 2.0    |
| RFASWH656FTF03   |                    | 0.4                  | 2.7                  | 0.40~0.76dB(704~2690MHz)       | 20~30  | 17~26  | 2    | 2.0 x 2.0    |
| RFASWD658FTF03   | SP8T               | 0.4                  | 2.7                  | 0.40~0.76dB(704~2690MHz)       | 20~30  | 17~26  | 2    | 2.0 x 2.0    |
| RMASME494ATF03   | SP10T              | 0.4                  | 2.7                  | 0.60~0.85dB(824~2690MHz)       | 23~30  | 20~26  | 2    | 2.5 x 2.5    |
| RFASWE660DTF03   |                    | 0.7                  | 2.7                  | 0.45~0.75dB(700~2700MHz)       | 18~26  | 18~26  | 2    | 2.4 x 2.4    |
| RFASWF662DTF03   | SP12T              | 0.4                  | 2.7                  | 0.50~0.72dB(700~2690MHz)       | 20~30  | 16~23  | 2    | 2.5 x 2.5    |
| RMASMF496ATF03   |                    | 0.4                  | 2.7                  | 0.60~0.85dB(824~2690MHz)       | 23~30  | 20~26  | 2    | 2.5 x 2.5    |
| RMASMP491ATF03   | SP14T              | 0.4                  | 2.7                  | 0.70~1.15dB(700~2690MHz)       | 20~30  | 16~20  | 2    | 2.5 x 2.9    |
| RMASMNT1492ATF03 | SP16T              | 0.4                  | 2.7                  | 0.60~1.00dB(824~2690MHz)       | 20~30  | 16~20  | 2    | 2.5 x 3.3    |
| RMASMU532ATF03   | DP14T (SP8T+SP6T)  | 0.4                  | 2.7                  | 0.65~1.15dB(704~2690MHz)       | 17~23  | 14~21  | 1.5  | 2.8 x 2.8    |
| RMASMU890ATF03   | DP14T (SP7T+SP7T)  | 0.4                  | 2.7                  | 0.60~0.85dB(600~2690MHz)       | 18~25  | 15~23  | 1.5  | 3.2 x 2.8    |
| RMASMS535ATF03   | DP21T (SP12T+SP9T) | 0.7                  | 3.0                  | 0.65~1.10dB(824~2690MHz)       | 15~23  | 14~21  | 2    | 3.6 x 2.8    |


■ Application Circuit (LTE Antenna Tuner-GPIO)

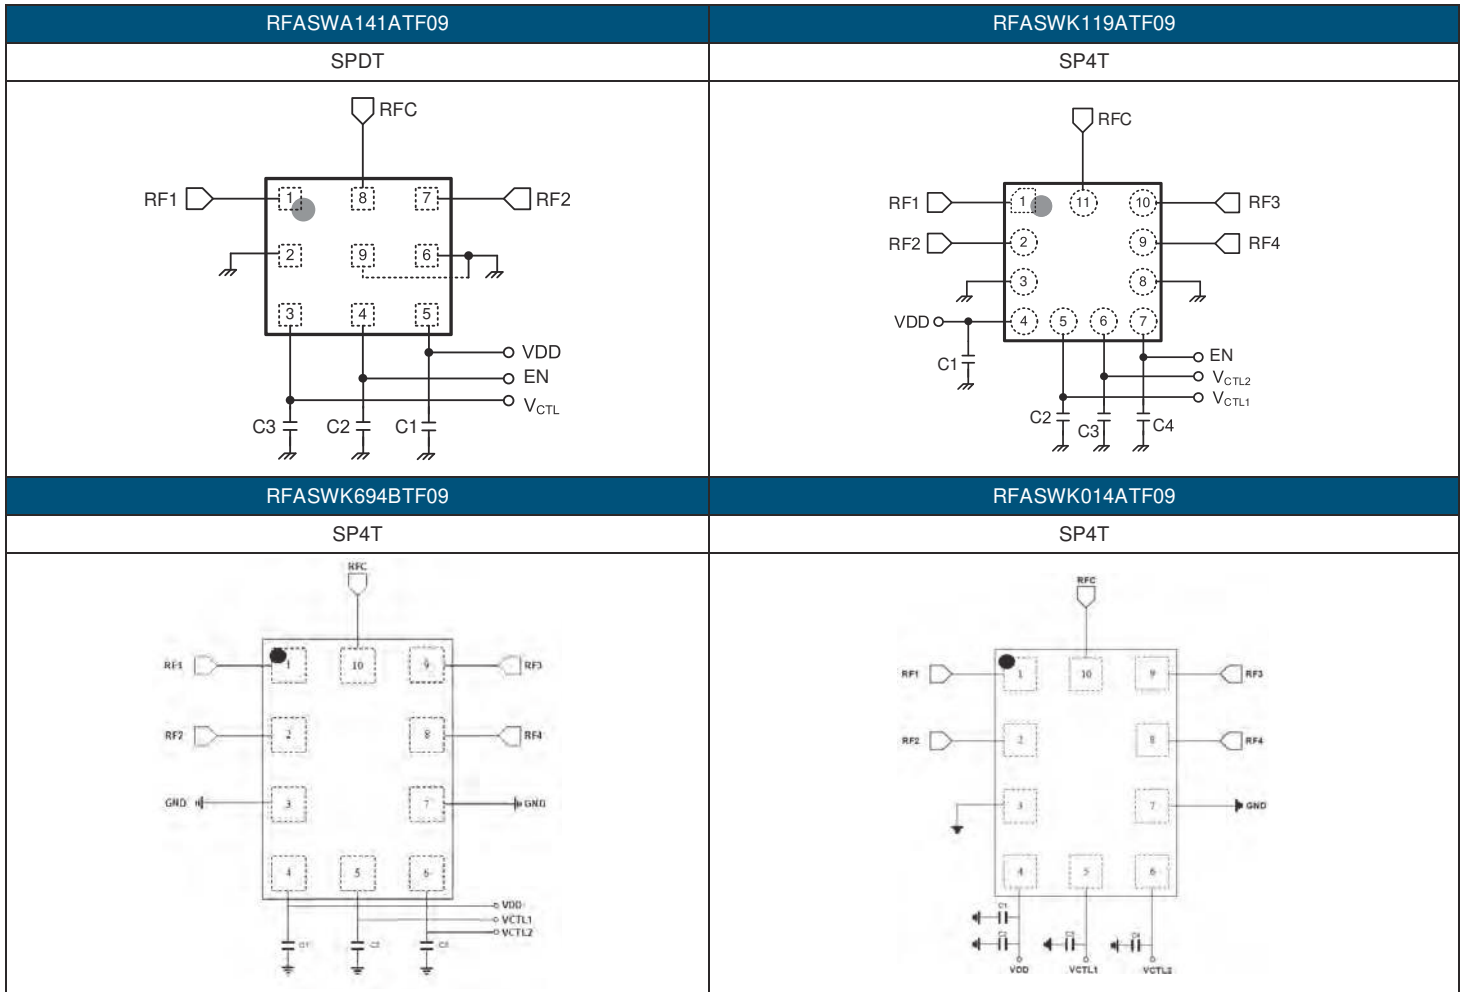

■ ELECTRICAL SPECIFICATION

| Part Number    | Description | Frequency (GHz) Min. | Frequency (GHz) Max. | Insertion loss (dB)        | Isolation | VSWR | Package (mm) |
|----------------|-------------|----------------------|----------------------|----------------------------|-----------|------|--------------|
| RFASWA141ATF09 | SPDT        | 0.4                  | 3.0                  | 0.20~0.35dB(700~2700MHz)   | 11~21     | 1.22 | 1.67 x 1.47  |
| RFASWK119ATF09 | SP4T        | 0.4                  | 3.0                  | 0.40~0.75dB(1000~2700MHz)  | 14~24     | 1.78 | 1.6 x 1.6    |
| RFASWK694BTF09 | SP4T        | 0.5                  | 2.7                  | 0.30~0.67dB(615~2700MHz)   | 16~22     | 1.58 | 1.1 x 1.5    |
| RFASWK014ATF09 | SP4T        | 0.1                  | 2.7                  | 0.25~1.05 dB (700~2700MHz) | 16~25     | 1.28 | 1.1 x 1.5    |

■ Application Circuit (Network-GPIO)

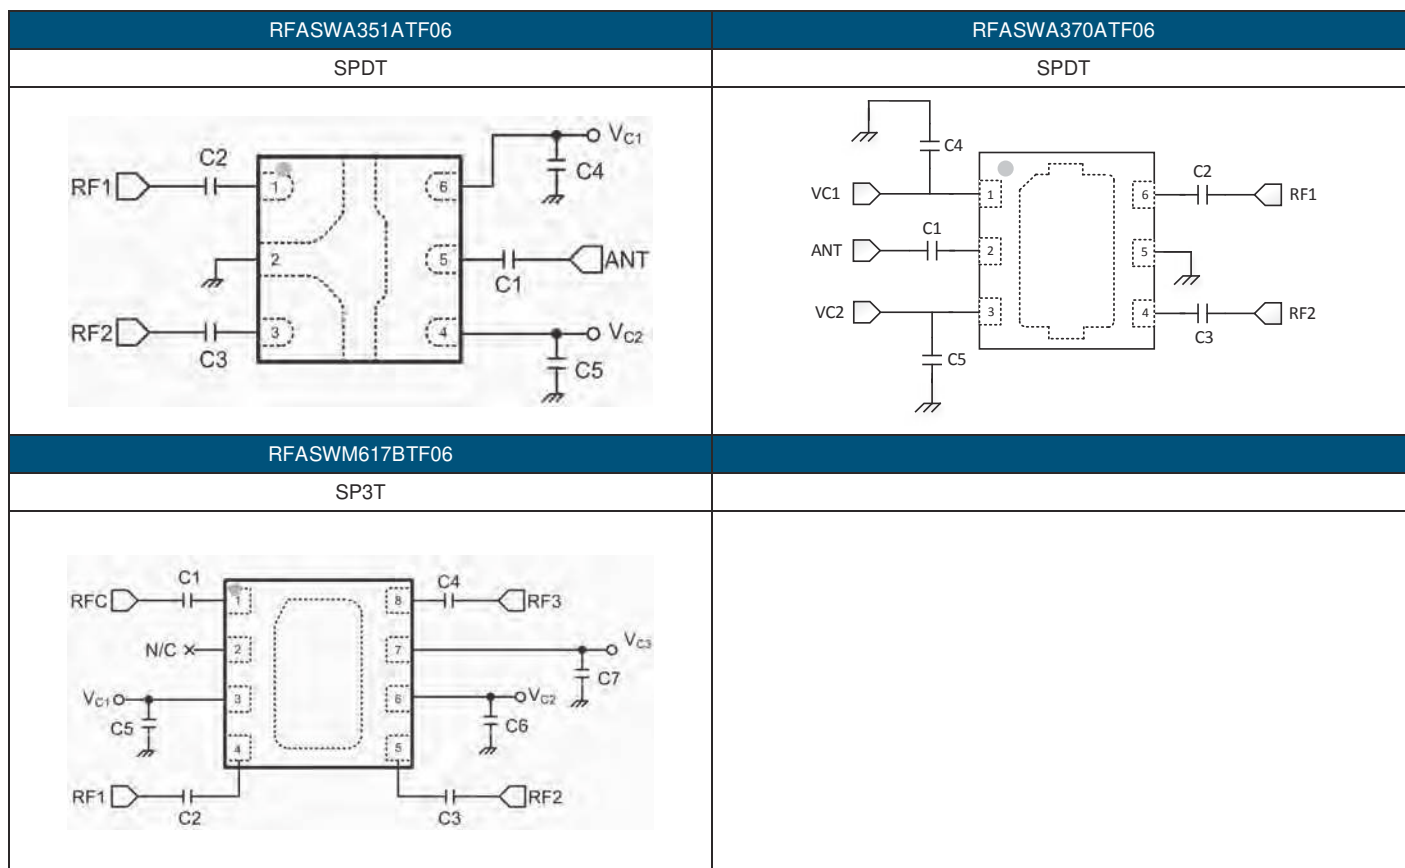

■ ELECTRICAL SPECIFICATION

| Part Number    | Description | Frequency (GHz) Min. | Frequency (GHz) Max. | Insertion loss (dB)      | Isolation | VSWR | Package (mm) |
|----------------|-------------|----------------------|----------------------|--------------------------|-----------|------|--------------|
| RFASWA351ATF06 | SPDT        | 0.5                  | 6.0                  | 0.35~0.70dB(500~6000MHz) | 15~25     | 2    | 1.0 x 1.0    |
| RFASWA370ATF06 | SPDT        | 0.5                  | 6.0                  | 0.50~0.90dB(500~5850MHz) | 23~28.5   | 1.67 | 1.5 x 1.5    |
| RFASWM617BTF06 | SP3T        | 0.5                  | 6.0                  | 0.35~0.65dB(500~6000MHz) | 15~30     | 1.92 | 1.5 x 1.5    |

DIPOLE ANTENNA (N/SMA)

■ ELECTRICAL SPECIFICATION

| Series | Size(mm) |       | Working Frequency Range    | Gain  | VSWR   | Return Loss   |
|--------|----------|-------|----------------------------|---|--|---|
|        | L        | Ø     |                            |   |  |   |
| 8709   | 87       | 9.95  | 2.4~2.5 GHz                | 2dBi  | <2   | <-10dB  |
|        |          |       | 2.4~2.5/5.x GHz            | 2.4~2.5 GHz : 2dBi<br>5.15~5.85 GHz : 3dBi  | <2   | <-10dB  |
| 1313   | 137.5    | 13    | 2.4~2.5 GHz                | 3dBi  | <2   | <-10dB  |
|        |          |       | 2.4~2.5/5.x GHz            | 2.4~2.5 GHz : 3dBi<br>5.15~5.85 GHz : 3dBi  | <2   | <-10dB  |
| 1513   | 157.5    | 13    | 2.4~2.5 GHz                | 3dBi  | <2   | <-10dB  |
|        |          |       | 2.4~2.5/5.x GHz            | 2.4~2.5 GHz : 3dBi<br>5.15~5.85 GHz : 3dBi  | <2   | <-10dB  |
| 1713   | 172.5    | 13    | 2.4~2.5 GHz                | 3dBi  | <2   | <-10dB  |
|        |          |       | 2.4~2.5/5.x GHz            | 2.4~2.5 GHz : 4dBi<br>5.15~5.85 GHz : 5dBi  | <2   | <-10dB  |
| 3913   | 392      | 12.5  | 2.4~2.5 GHz                | 9dBi  | <2   | <-10dB  |
| 1310   | 135.7    | 10    | 2.4~2.5 GHz                | 5dBi  | <2   | <-10dB  |
|        |          |       | 5.x GHz                    | 5dBi  | <2   | <-10dB  |
|        |          |       | 2.4~2.5/5.x GHz            | 3dBi~4dBi   | <2   | <-10dB  |
|        |          |       | Lora                       | 3dBi  | <2.5   | <-7dB   |
|        |          |       | LTE                        | 3dBi  | <3   | <-6dB   |
| 1413   | 148.5    | 13    | 2.4~2.5 GHz                | 3dBi  | <2   | <-10dB  |
|        |          |       | 5.x GHz                    | 3dBi  | <2   | <-10dB  |
|        |          |       | 2.4~2.5/5.x GHz            | 3dBi  | <2   | <-10dB  |
|        |          |       | LTE                        | 3dBi  | <3   | <-6dB   |
| 1615   | 169.9    | 13    | LTE+Sub-6G+5G              | 0.93 dBi( @ 617 ~960 MHz)<br>2.71 dBi( @1710 ~ 2690 MHz)<br>3.66 dBi(@ 3300 ~4200 MHz)<br>4.37 dBi(@5150 ~7150 MHz) | <3.0<br>(@ 617~960 / 1710~2690 MHz)<br><3.0<br>(@ 3300~4200 / 5150~7150 MHz) | <6.0 dB<br>(@ 617~960 / 1710~2690 MHz)<br><-6.0 dB<br>(@ 3300~4200 / 5150~7150 MHz) |
| 1913   | 196.6    | 13    | 2.4~2.5 GHz                | 5dBi  | <2   | <-10dB  |
|        |          |       | 2.4~2.5/5.x GHz            | 2.4~2.5 GHz : 4dBi<br>5.15~5.85 GHz : 5dBi  | <2   | <-10dB  |
| 2213   | 217.1    | 13    | 2.4~2.5/5.x GHz            | 2.4~2.5 GHz : 5dBi<br>5.15~5.85 GHz : 4dBi  | <2   | <-10dB  |
|        |          |       | 2.4~2.5 GHz                | 6dBi  | <2   | <-10dB  |
|        |          |       | 2.4~2.5/5.x GHz            | 7dBi  | <2   | <-10dB  |
|        |          |       | 5.x GHz                    | 7dBi  | <2   | <-10dB  |
|        |          |       | LTE                        | 5dBi  | <3   | <-6dB   |
| 2220   | 220      | 20    | 2.4 GHz                    | 5dBi  | <2   | <-10dB  |
|        |          |       | 5.x GHz                    | 5dBi  | <2   | <-10dB  |
|        |          |       | 2.4~2.5 GHz                | 7dBi  | <2   | <-10dB  |
| 2520   | 25       | 20    | 2.4 GHz                    | 5~7dBi  | <2   | <-10dB  |
|        |          |       | 5.x GHz                    | 7dBi  | <2   | <-10dB  |
|        |          |       | 2.4~2.5 GHz ( High Gain )  | 7dBi  | <2   | <-10dB  |
| 4358   | 43.1     | 58.45 | 2.4~2.5 GHz<br>4.9~7.2 GHz | 3.5dBi(@2.4~2.5 GHz)<br>2.5dBi(@4.9~7.2 GHz)  | <2   | <-10dB  |


| 8709  | 1313  | 1513  | 1713   | 3913   |
|---|---|---|--|--|
|    |    |    |   |   |
| 1310  | 1413  | 2213  | 2220   | 2520   |
|   |   |   |  |  |
| 1913  | 1615  | 4358  |  |  |
|  |  |  |  |  |



DIPOLE ANTENNA (Cable)

■ ELECTRICAL SPECIFICATION


| Series | Size(mm) |      | Working Frequency Range | Gain                                       | VSWR | Return Loss |
|--------|----------|------|-------------------------|--|------|-------------|
|        | L        | Ø    |                         |  |      |             |
| 8709   | 87       | 9.35 | 2.4~2.5 GHz             | 2dBi                                       | <2   | <-10dB      |
|        |          |      | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 2dBi<br>5.15~5.85 GHz : 3dBi | <2   | <-10dB      |
| 1313   | 133      | 9.35 | 2.4~2.5 GHz             | 3dBi                                       | <2   | <-10dB      |
|        |          |      | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 3dBi<br>5.15~5.85 GHz : 3dBi | <2   | <-10dB      |
| 1513   | 152      | 9.35 | 2.4~2.5 GHz             | 3dBi                                       | <2   | <-10dB      |
|        |          |      | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 3dBi<br>5.15~5.85 GHz : 3dBi | <2   | <-10dB      |
| 1514   | 158      | 14   | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 5dBi<br>5.15~5.85 GHz : 7dBi | <2   | <-10dB      |
| 1713   | 172      | 9.35 | 2.4~2.5 GHz             | 3dBi                                       | <2   | <-10dB      |
|        |          |      | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 4dBi<br>5.15~5.85 GHz : 5dBi | <2   | <-10dB      |
| 1310   | 135.7    | 10   | 2.4~2.5 GHz             | 5dBi                                       | <2   | <-10dB      |
|        |          |      | 5.x GHz                 | 5dBi                                       | <2   | <-10dB      |
|        |          |      | 2.4~2.5/5.x GHz         | 3dBi~4dBi                                  | <2   | <-10dB      |
|        |          |      | LTE                     | 3dBi                                       | <3   | <-6dB       |
| 1913   | 192      | 9.35 | 2.4~2.5 GHz             | 5dBi                                       | <2   | <-10dB      |
|        |          |      | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 4dBi<br>5.15~5.85 GHz : 5dBi | <2   | <-10dB      |

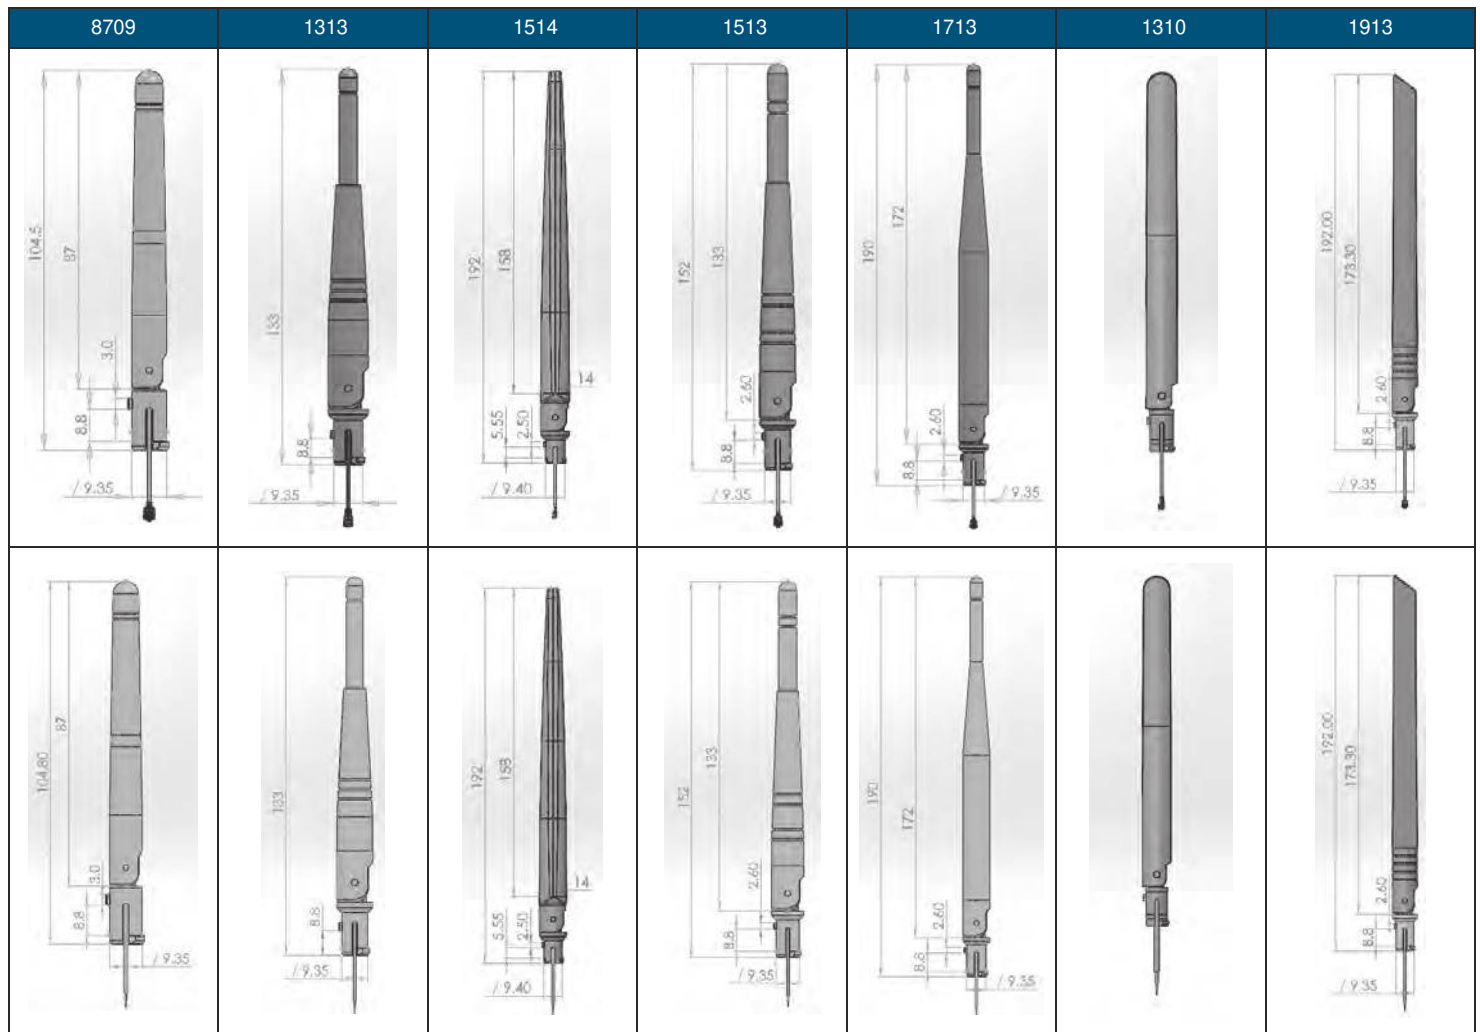

## Cable Assembly

### ■ ELECTRICAL SPECIFICATION

| Series | Connector 1               | Connector 2          | Wire Diameter           | Color  | L      | Working Frequency Range | VSWR |
|--------|---------------------------|----------------------|-------------------------|--------|--------|-------------------------|------|
| 1006   | Straight Reverse SMA Jack | IPEX(or Strip & Tin) | Ø1.13/Ø1.37/RG178       | Option | Option | DC ~ 6 GHz              | 2.0  |
| 1106   | Straight Reverse SMA Jack | IPEX(or Strip & Tin) | Ø1.13/Ø1.37/RG178       | Option | Option | DC ~ 6 GHz              | 2.0  |
| 1613   | R/A Reverse SMA Jack      | IPEX(or Strip & Tin) | Ø1.13/Ø1.37/RG178       | Option | Option | DC ~ 6 GHz              | 2.0  |
| 0403   | IPEX                      | IPEX(or Strip & Tin) | Ø0.81/Ø1.13/Ø1.37/RG178 | Option | Option | DC ~ 6 GHz              | 2.0  |
| 0202   | IPEX III                  | IPEX(or Strip & Tin) | Ø0.81                   | Option | Option | DC ~ 6 GHz              | 2.0  |
| xxxx   | Strip & Tin               | Strip & Tin          | Ø0.81/Ø1.13/Ø1.37/RG178 | Option | Option | DC ~ 6 GHz              | 2.0  |
| 1015   | N Jack                    | MMCX(or Strip & Tin) | RG316                   | Option | Option | DC ~ 6 GHz              | 2.0  |
| 1008   | Straight Reverse SMA Plug | IPEX(or Strip & Tin) | RG405                   | Option | Option | DC ~ 6 GHz              | 2.0  |

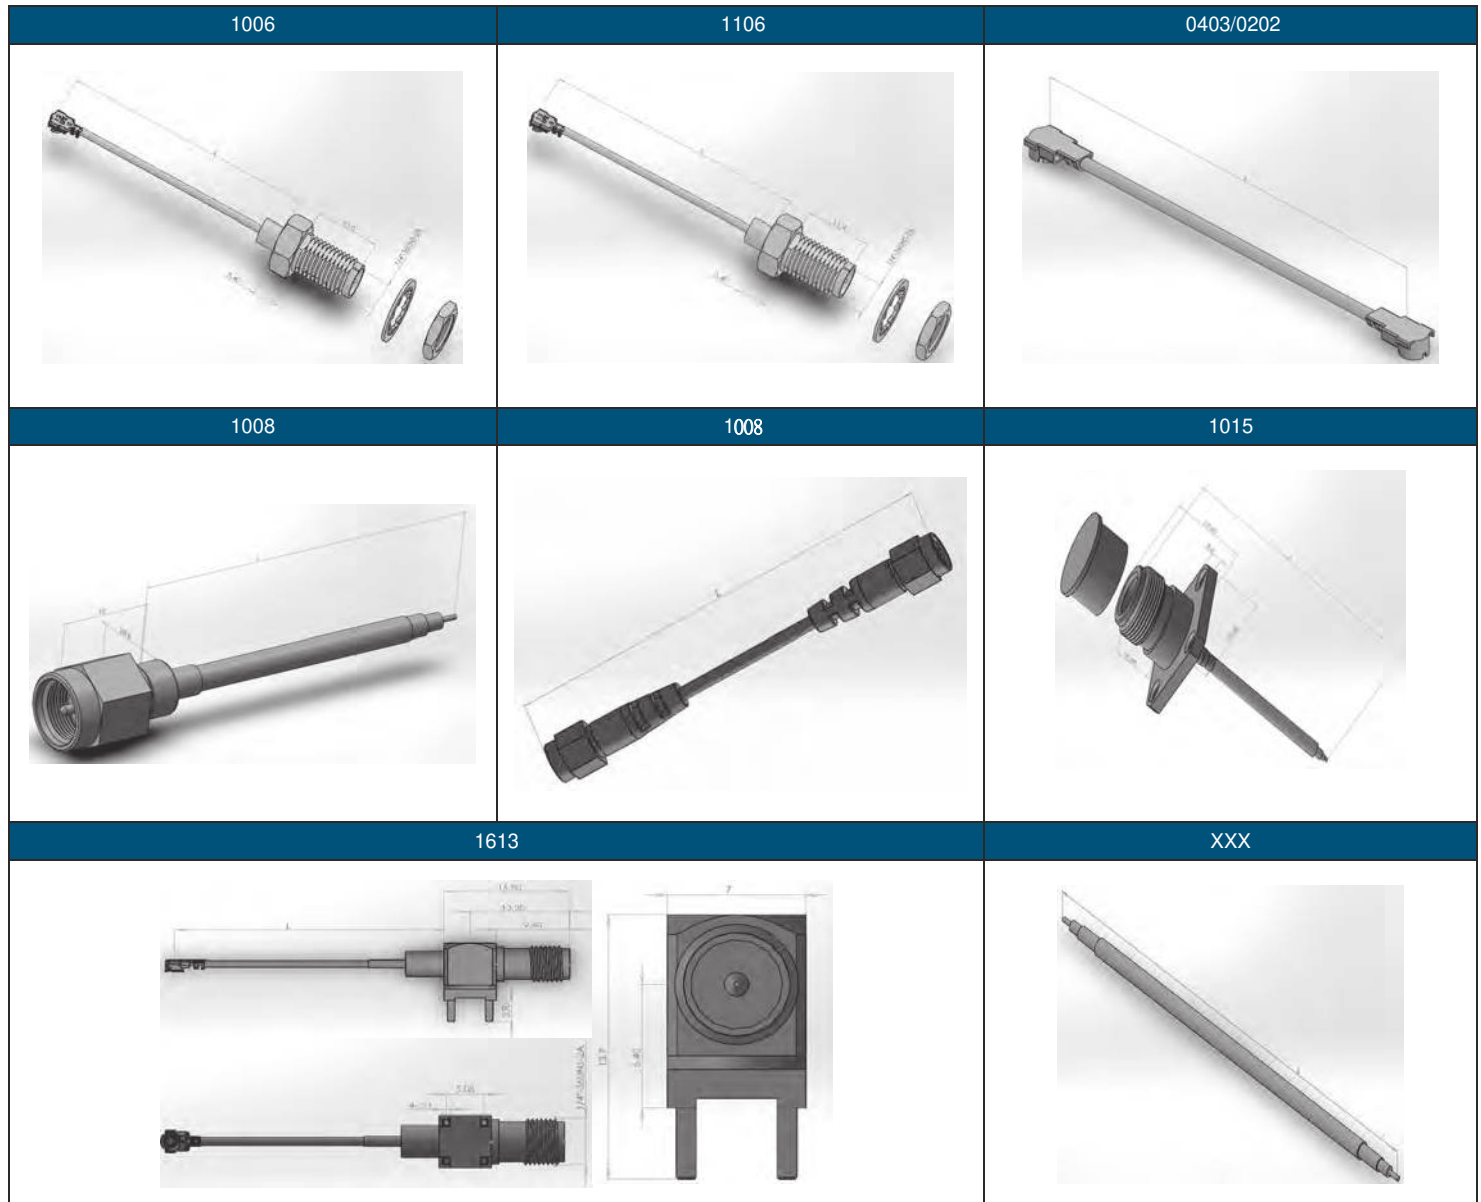

PCB Antenna

■ ELECTRICAL SPECIFICATION


| Series | PCB Size(mm) |     | Cable Length (mm) L | Working Frequency Range | Gain  | VSWR  | Return Loss   |
|--------|--------------|-----|---------------------|-------------------------|---|---|---|
|        | L            | w   |                     |                         |   |   |   |
| 1118   | 118          | 18  | Option              | LTE+Sub-6G+5G           | 3.32 dBi( @ 698 ~960 MHz)<br>6.04 dBi( @1710 ~ 2690 MHz)<br>5.36 dBi(@ 3300 ~3800 MHz)<br>4.39 dBi(@5150 ~5850 MHz) | <2.0(@ 698~960 MHz)<br><3.0(@1710~ 2690 / 3300 ~3800 / 5150~5850 MHz) | <-10.0 dB<br>(@698~960 / 1710~2690 MHz)<br><-6.0 dB<br>(@3300~3800 / 5150~5850 MHz) |
| 2022   | 20           | 22  | Option              | LTE+Sub-6G+5G           | 5.54 dBi  | <2  | <-10dB  |
| 2313   | 23           | 13  | Option              | 5 GHz                   | 3dBi  | <2  | <-10dB  |
| 4305   | 43           | 5   | Option              | 2.4~2.5 GHz             | 2dBi  | <2  | <-10dB  |
| 2010   | 20.1         | 10  | Option              | 5 GHz                   | 3dBi  | <2  | <-10dB  |
| 5010   | 50           | 10  | Option              | 2.4~2.5 GHz             | 3dBi  | <2  | <-10dB  |
| 4308   | 43           | 8.3 | Option              | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 2dBi<br>5.x GHz : 3dBi  | <2  | <-10dB  |
| 4606   | 46.5         | 6   | Option              | 2.4~2.5 GHz             | 2dBi  | <2  | <-10dB  |
| 3513   | 35           | 13  | Option              | 2.4~2.5 GHz             | 4dBi  | <2  | <-10dB  |
| 3515   | 35           | 15  | Option              | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 2dBi<br>5.x GHz : 3dBi  | <2  | <-10dB  |



FPA Antenna

■ ELECTRICAL SPECIFICATION

| Series | Size(mm) |      | Cable Length(mm)<br>L | Working Frequency Range | Gain | VSWR | Return Loss |
|--------|----------|------|-----------------------|-------------------------|------|------|-------------|
|        | L        | w    |                       |                         |      |      |             |
| 3025   | 30.3     | 25.3 | Option                | 2.4~2.5 GHz             | 3dBi | <2   | <-10dB      |
| 3225   | 25       | 32.6 | Option                | 2.4~2.5 GHz             | 2dBi | <2   | <-10dB      |
| 3226   | 32.35    | 26   | Option                | 2.4~2.5 / 5.x GHz       | 3dBi | <2   | <-10dB      |
| 4305   | 43       | 5.5  | Option                | 2.4~2.5 GHz             | 3dBi | <2   | <-10dB      |
| 3010   | 30       | 10   | Option                | 2.4~2.5 GHz             | 2dBi | <2   | <-10dB      |
| 2006   | 20       | 6    | Option                | 5.x GHz                 | 2dBi | <2   | <-10dB      |

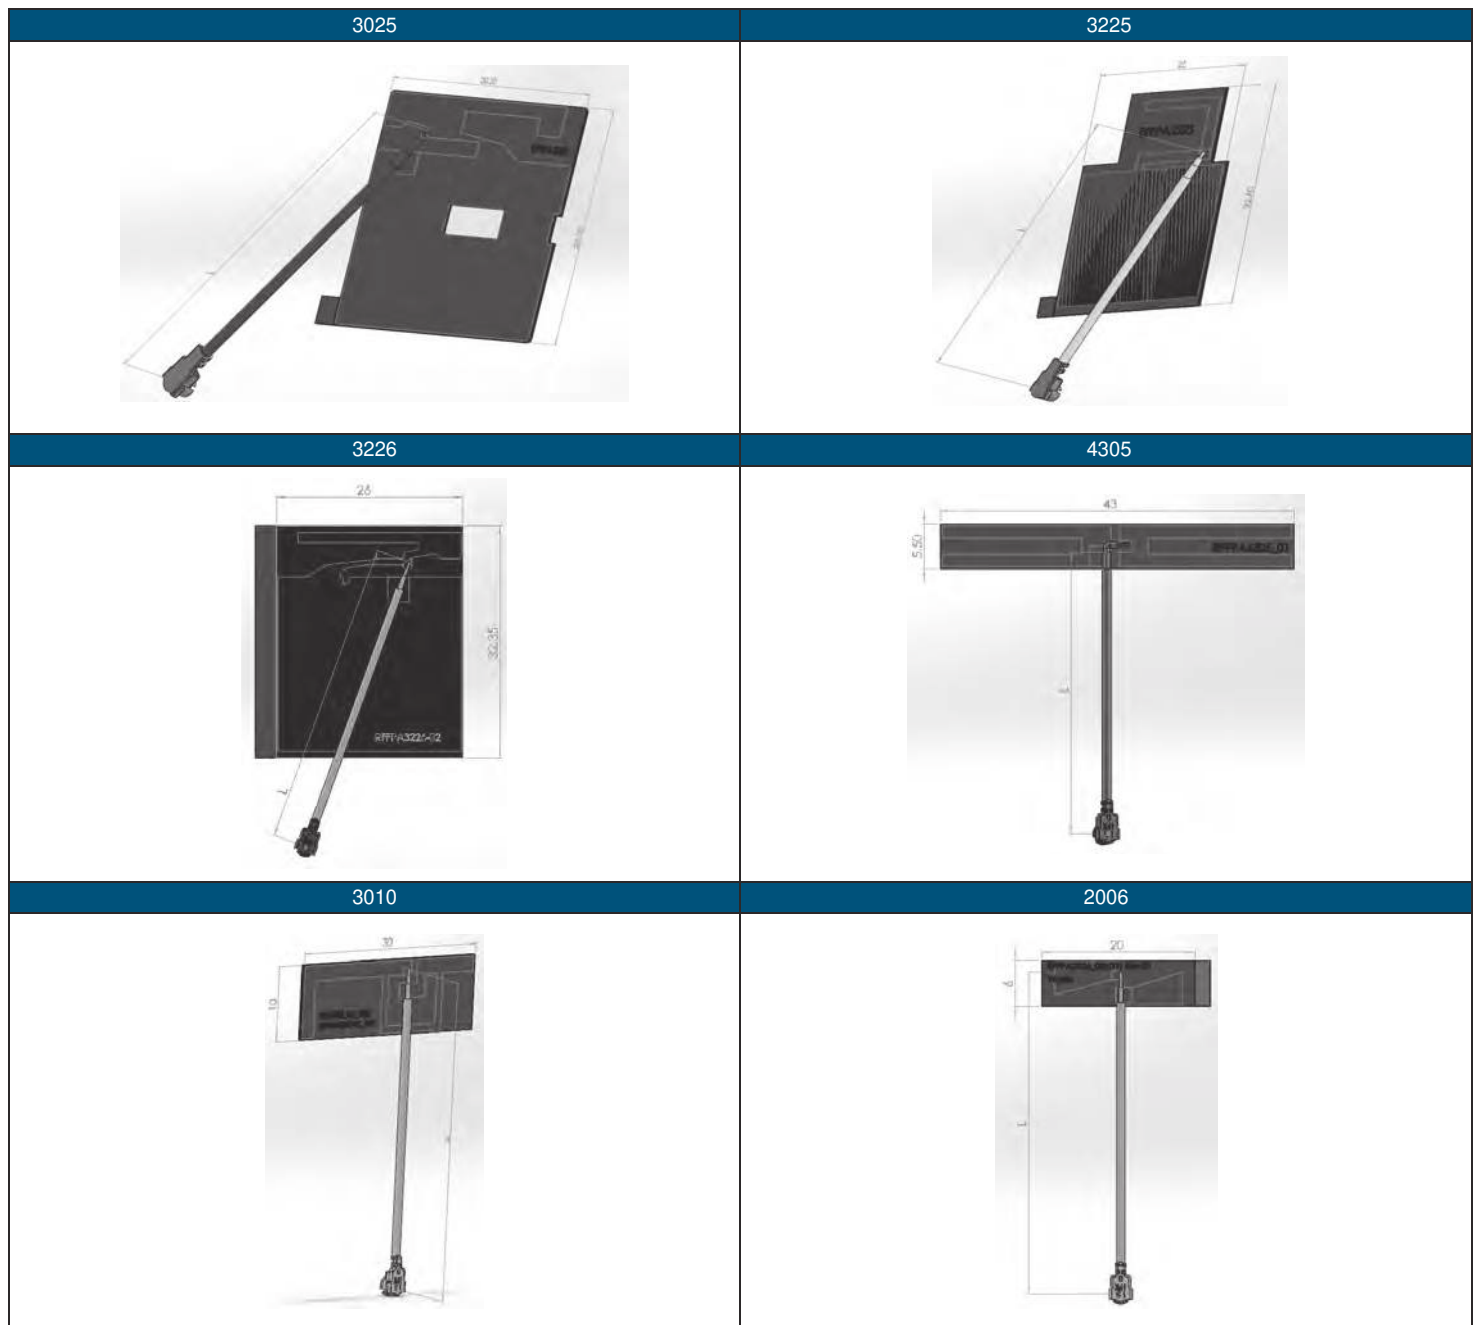


Metal Antenna


■ ELECTRICAL SPECIFICATION

| Series | Size(mm) |      | Cable Length(mm)<br>L | Working Frequency Range | Gain                                       | VSWR | Return Loss |
|--------|----------|------|-----------------------|-------------------------|--|------|-------------|
|        | L        | w    |                       |                         |  |      |             |
| 3109   | 31       | 9    | Option                | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 2 dBi<br>5.x GHz : 2 dBi     | <2   | <-10dB      |
| 2107   | 21.5     | 7.1  | None                  | 2.4~2.5 GHz             | 3 dBi                                      | <2   | <-10dB      |
| 2807   | 28.6     | 7.9  | Option                | 2.4~2.5 GHz             | 3 dBi                                      | <2   | <-10dB      |
| 3407   | 34       | 7.5  | Option                | 2.4~2.5 GHz             | 3 dBi                                      | <2   | <-10dB      |
| 3706   | 37.4     | 6.5  | Option                | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 5 dBi<br>5.x GHz : 5 dBi     | <2   | <-10dB      |
| 2712   | 27.75    | 12.8 | None                  | 2.4~2.5 GHz             | 3.38 dBi                                   | <2   | <-10dB      |
| 2811   | 27.05    | 11.3 | None                  | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 2.66dBi<br>5.x GHz : 3.68dBi | <2   | <-10dB      |
| 2911   | 29.6     | 11.3 | None                  | 2.4~2.5/5.x GHz         | 2.4~2.5 GHz : 2.14dBi<br>5.x GHz : 2.68dBi | <2   | <-10dB      |


3109

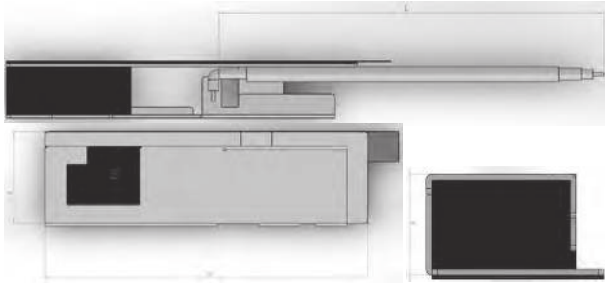


3407

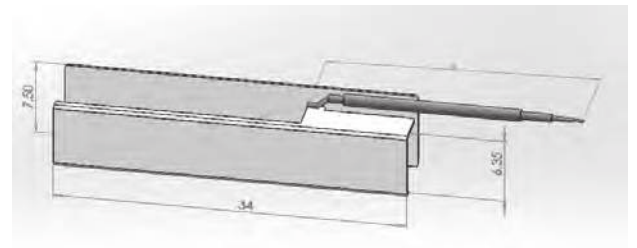


2107

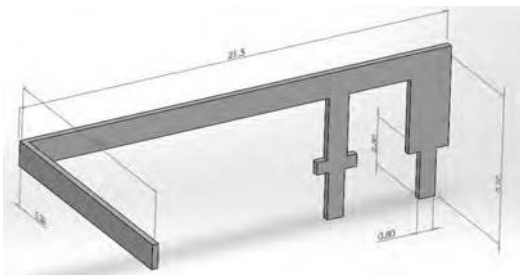


2807

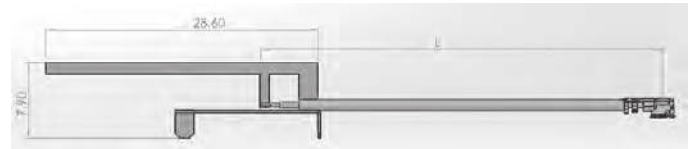


3706

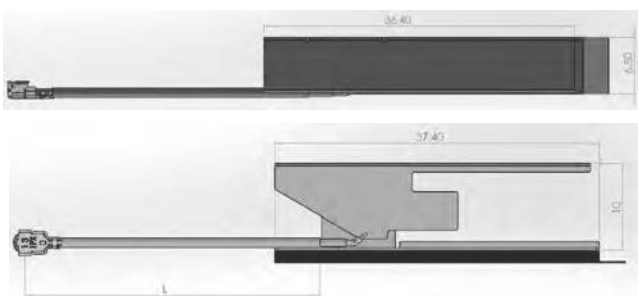


2712

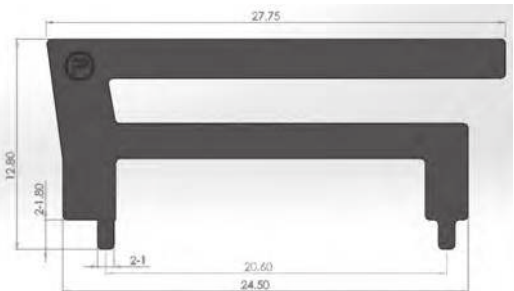

2811

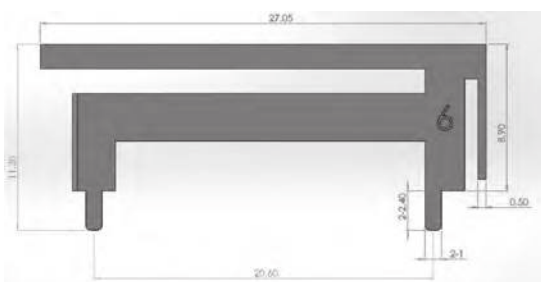

2911

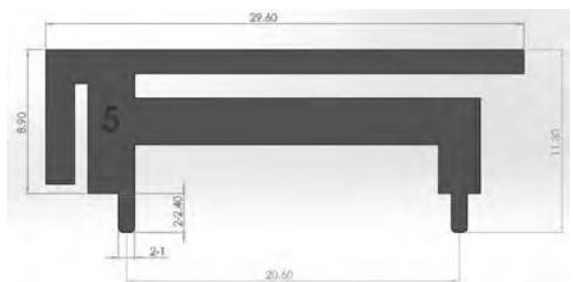


NFC Antenna (NFC/WPC/WNC)

■ ELECTRICAL SPECIFICATION


NFC

| Series | Size(mm) |    | Ls         | Rs         | Q               |
|--------|----------|----|------------|------------|-----------------|
|        | L        | w  |            |            |                 |
| 5030   | 50       | 30 | 1.62±0.1μH | 0.66±0.15Ω | 15.42±2.5(1MHz) |
| 5040   | 50       | 40 | 1.89±0.1μH | 0.76±0.15Ω | 15.62±2.5(1MHz) |
| 6040   | 60       | 40 | 2.37±0.1μH | 0.85±0.15Ω | 17.5±2.5(1MHz)  |

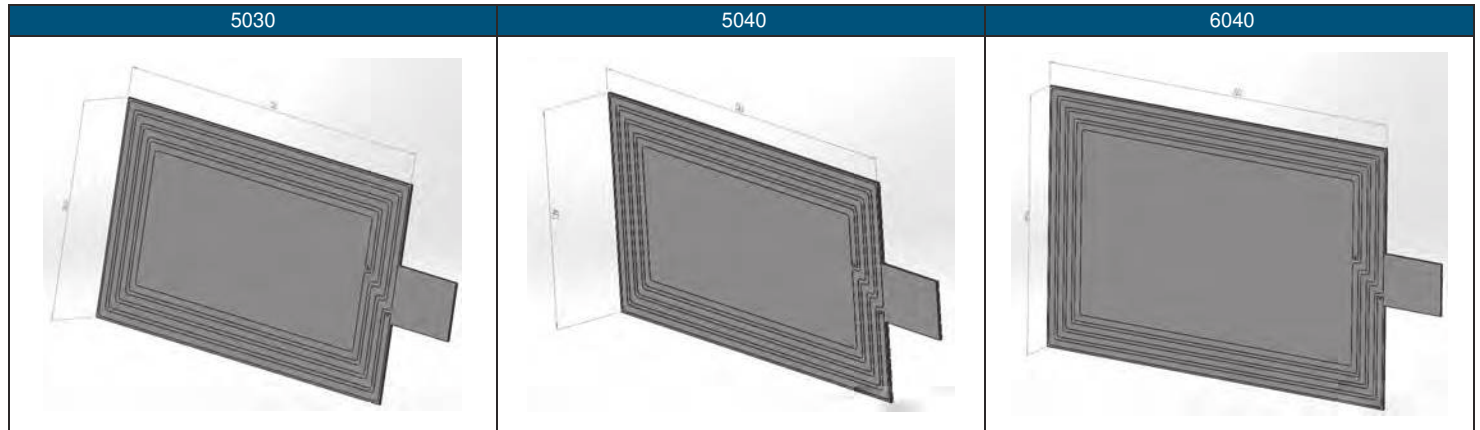

WPC & WNC


| TYPE | Series | Size(mm) |    | Ls         |             | Rs        |             | Q              |                 |
|------|--------|----------|----|------------|-------------|-----------|-------------|----------------|-----------------|
|      |        | L        | w  | NFC        | WPC         | NFC       | WPC         | NFC            | WPC             |
| WPC  | 4832   | 48       | 32 | 1.35±0.1μH |             | 0.3±0.15Ω |             | 28.3±2.5(1MHz) |                 |
| WNC  | 6060   | 60       | 60 | NFC        | 2.11±0.1μH  | NFC       | 0.572±0.15Ω | NFC            | 37.2±2.5(1MHz)  |
|      |        |          |    | WPC        | 18.69±0.1μH | WPC       | 0.837±0.15Ω | WPC            | 14.03±2.5(1MHz) |

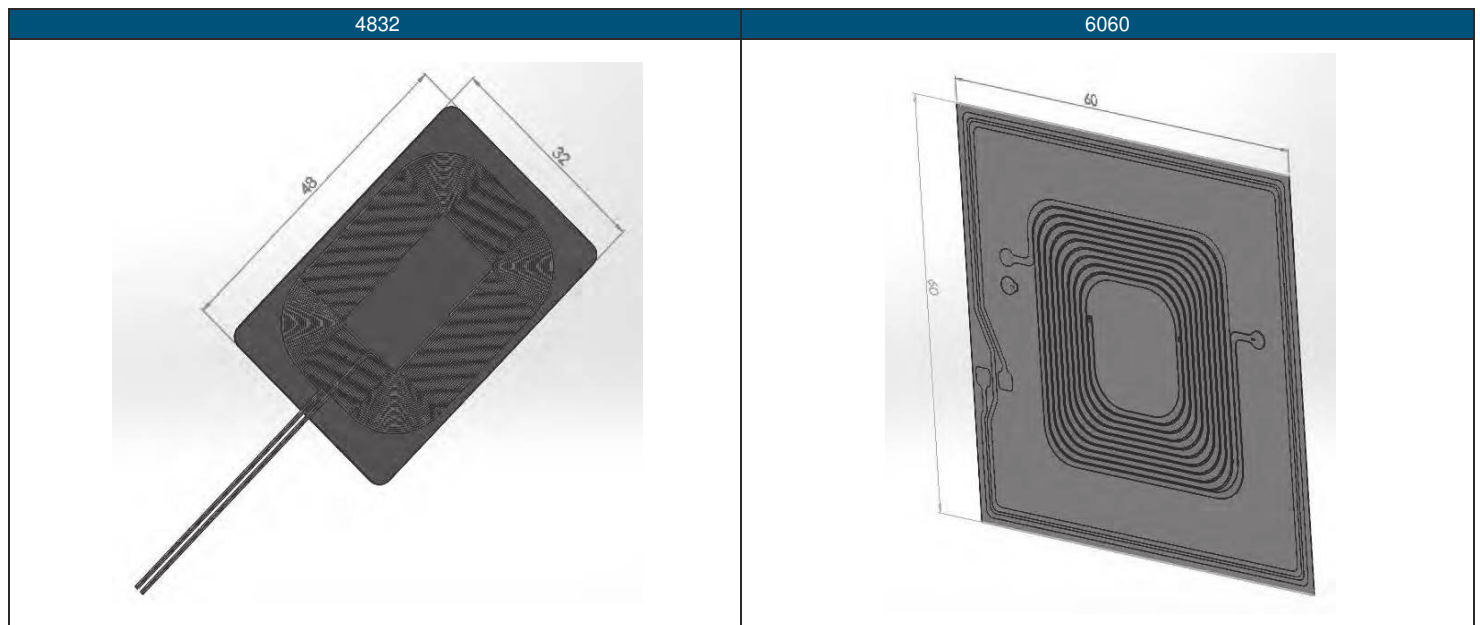

Connector


■ ELECTRICAL SPECIFICATION

| Series | Size(mm) |      | Working Frequency Range | VSWR |
|--------|----------|------|-------------------------|------|
|        | L        | w    |                         |      |
| 1612   | 16.8     | 12.3 | DC ~ 6 GHz              | 2.0  |
| 0703   | 7.5      | 3.3  | DC ~ 6 GHz              | 2.0  |
| 1308   | 13.3     | 8    | DC ~ 6 GHz              | 2.0  |
| 1609   | 16.5     | 9    | DC ~ 6 GHz              | 2.0  |

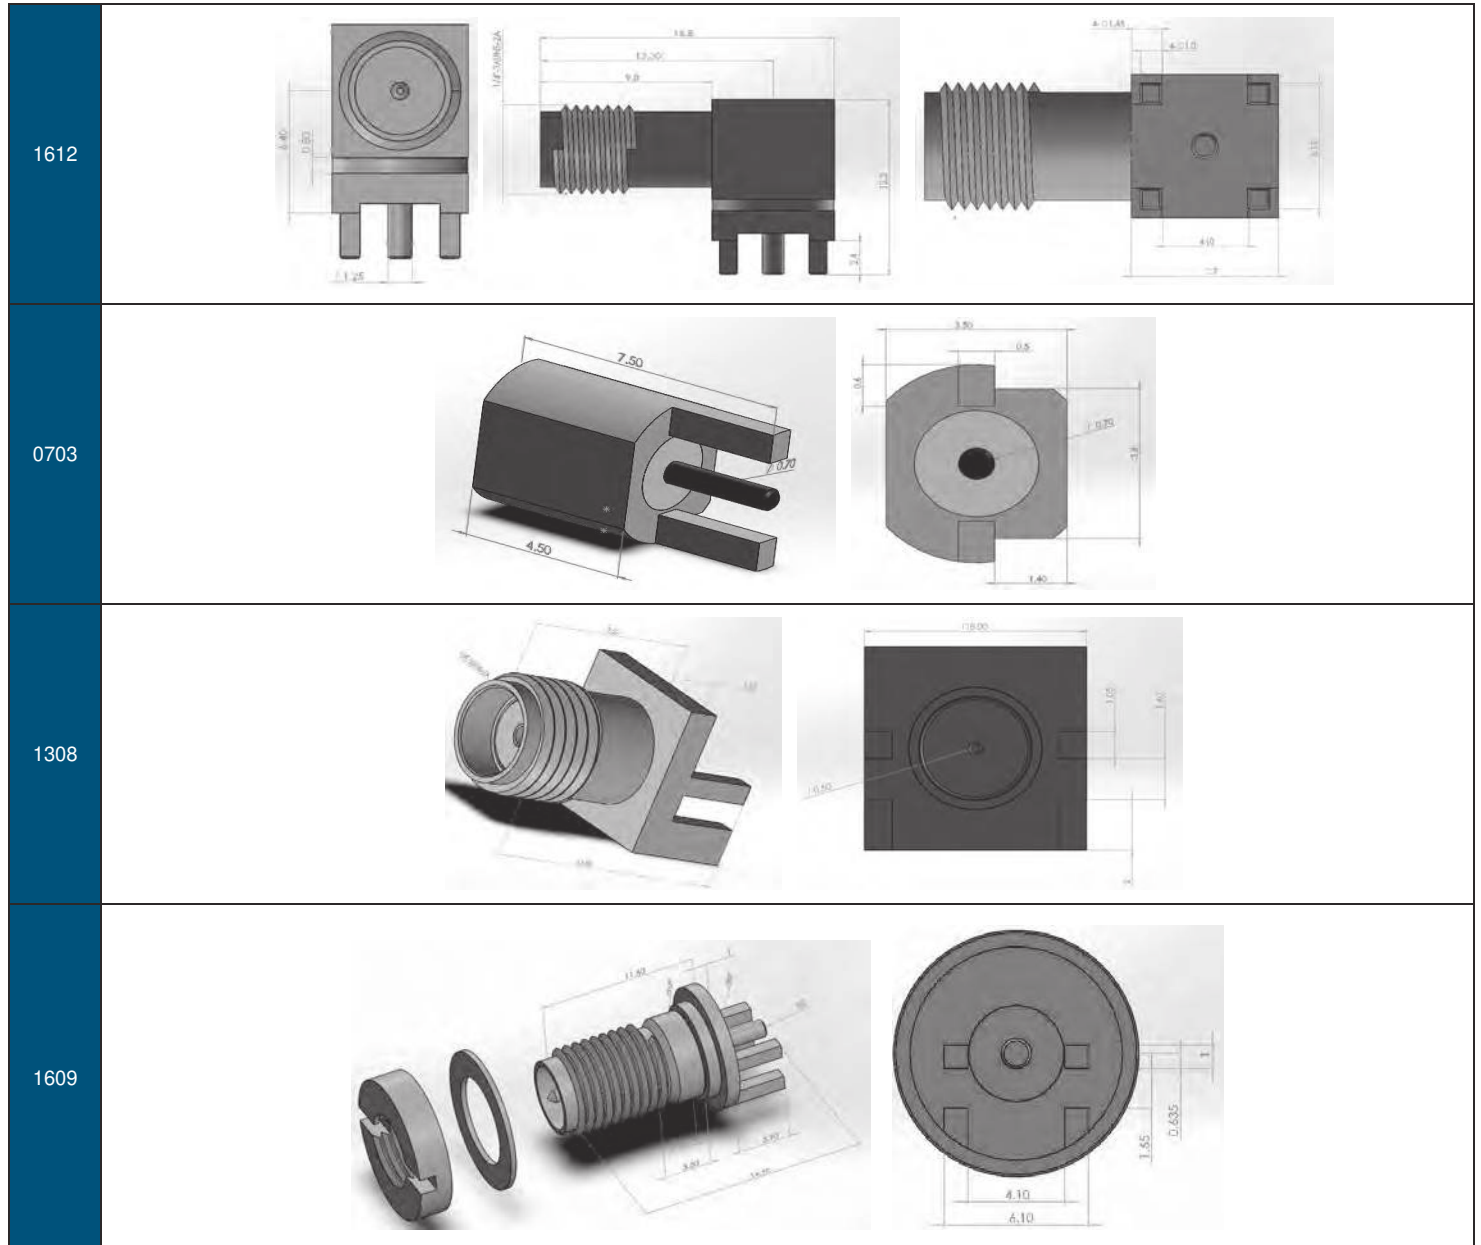


Measurement Equipment


- Antenna Passive Measurement Efficiency / 3D Pattern @400MHz ~6GHz
- Active Measurement TRP & TIS Measurement for GSM/WCDMA/TD-CDMA/TDD-LTE/FDD-LTE

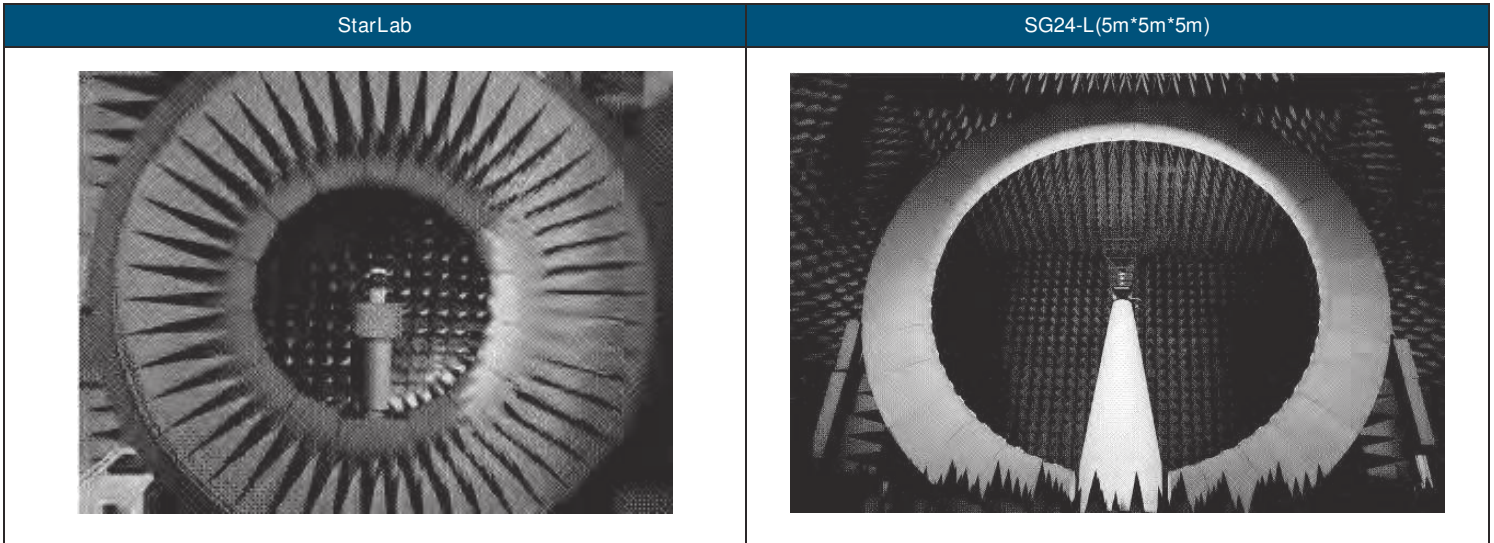

■ 2D Antenna Lab (Wireless Throughput Test)

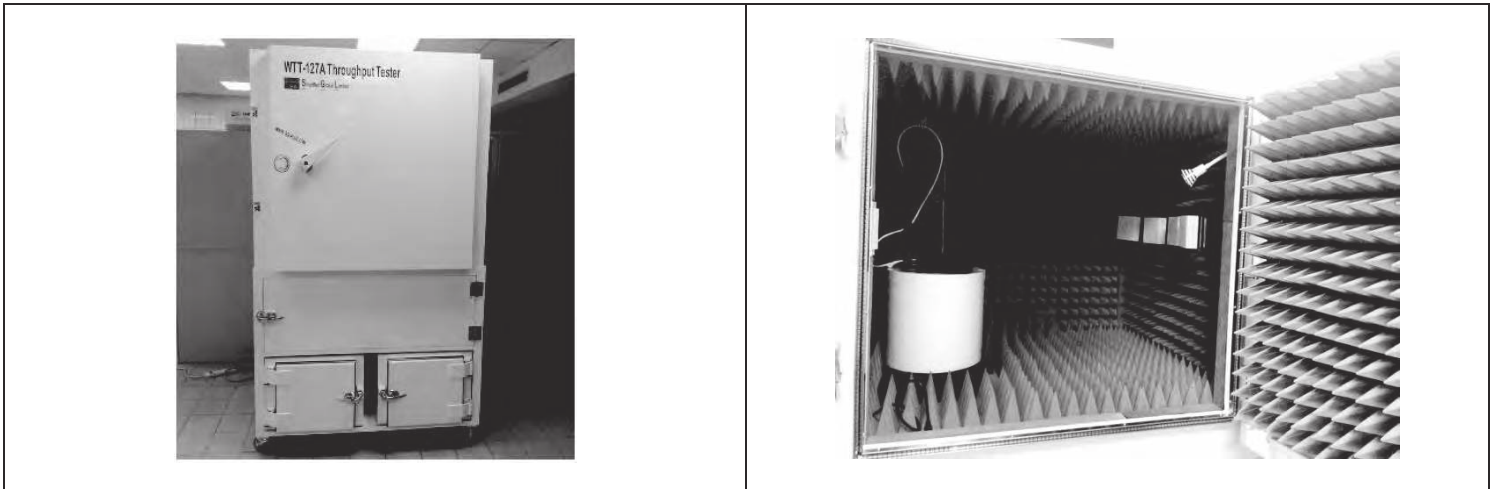


■ 2D Antenna Lab (Smart TV Wireless Throughput Test)

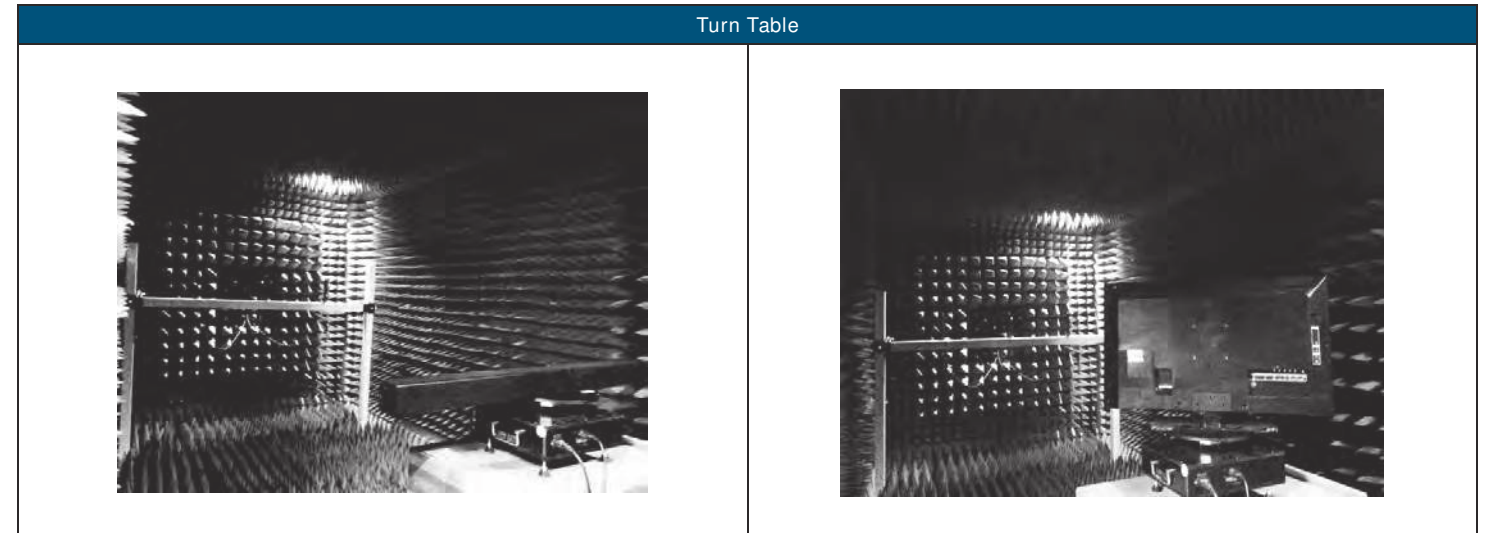



FIME EMVCo/ISO10373-6 / NFC Forum

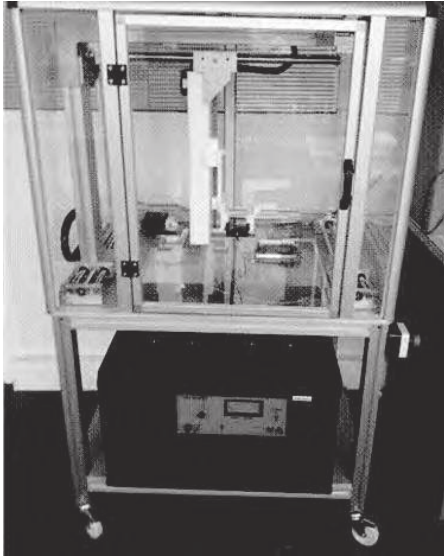

Comprion (NFC Forum)



Suzhou Smart TV Antenna Chamber



Shenzhen RayZone 1800





**Taiwan - Yang-Mei Plant / Sales Office**

Walsin Technology Corporation  
566-1, Kao-Shi Road, Yang-Mei, Tao-Yuan, Taiwan  
Tel: +886-3-475-8711 Fax: +886-3-475-7130 Email: [info@passivecomponent.com](mailto:info@passivecomponent.com)

**China - Dalang Plant / Sales Office**

Dongguan Walsin Tech. Electronics CO., Ltd.  
Xiniu Administrative Zone, Dalang Town, Dongguan City, Guangdong Province 523799  
Tel: +86-769-831-15168 Fax: +86-769-831-15188 Email: [msyu@passivecomponent.com](mailto:msyu@passivecomponent.com)

**China - Suzhou Plant / Sales Office**

Suzhou Walsin Technology Electronics Co., Ltd.  
No. 369, Changyan Street, Suzhou Industrial Park, Jiangsu Province 215126  
Tel: +86-512-628-36888 Fax: +86-512-628-37888 Email: [msyu@passivecomponent.com](mailto:msyu@passivecomponent.com)

**China - Guangzhou Plant / Sales Office**

Pan Overseas (Guangzhou) Electronic Co., Ltd.  
No. 277, Hong Ming Road, Eastern Section, Guangzhou Economic and Technology, Development Zone, China  
Tel: +86-20-8223-7476 Fax: +86-20-8223-7475 Email: [msyu@passivecomponent.com](mailto:msyu@passivecomponent.com)

**Germany - Munich Sales Office**

Walsin Technology Corporation Europe  
Bretonischer Ring 6, Pavillon 3, 85630 Grasbrunn, Germany  
Tel: +49-(0)89-9308-6475 Fax: +49-(0)89-9308-6464 Email: [aw@passivecomponent.com](mailto:aw@passivecomponent.com)

**Singapore - Sales Office**

WTC Singapore Sales Office, Singapore  
24 Sin Ming Lane Midview City, #04-100, Singapore 573970  
Contact: Morris Liew  
Tel: +65-6262 3997 Email: [morisliew@sg.passivecomponent.com](mailto:morrisliew@sg.passivecomponent.com)

**Malaysia - Sales Office**

Walsin Technology Corporation, Malaysia  
1st Floor, No.19, Jalan Puteri 5/8, Bandar Puteri Puchong, Puchong, 47100, Selangor, Malaysia  
Contact: Arthur Ling  
Tel : +6016-2217-948 Fax : +603-8051-7060 Email : [arthurling@passivecomponent.com](mailto:arthurling@passivecomponent.com)

**United States - West Coast Sales Office**

Walsin Technology Corporation, USA  
Contact: FC Tseng  
Tel: +1-214-708-5182 E-mail: [fctseng@passivecomponent.com](mailto:fctseng@passivecomponent.com)

**JAPAN - Sales Office**

PSA BLDG. 3F, 6-1-6 Chuou, Yamato-Shi, Kanagawa, 242-0021 Japan  
Tel:+81-46-204-8829 Fax:+81-46-204-8955 Email: [tsakano@kamaya.co.jp](mailto:tsakano@kamaya.co.jp)

**PSA** PASSIVE SYSTEM ALLIANCE  
WALSIN TECHNOLOGY CORPORATION