


PC BOARD LAYOUT
 RECOMMENDED PC BOARD THICKNESS 1.57[.062]

- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ POST MATERIAL: COPPER ALLOY.
- △ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- △ MARKING ON THIS SIDE.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- △ PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.

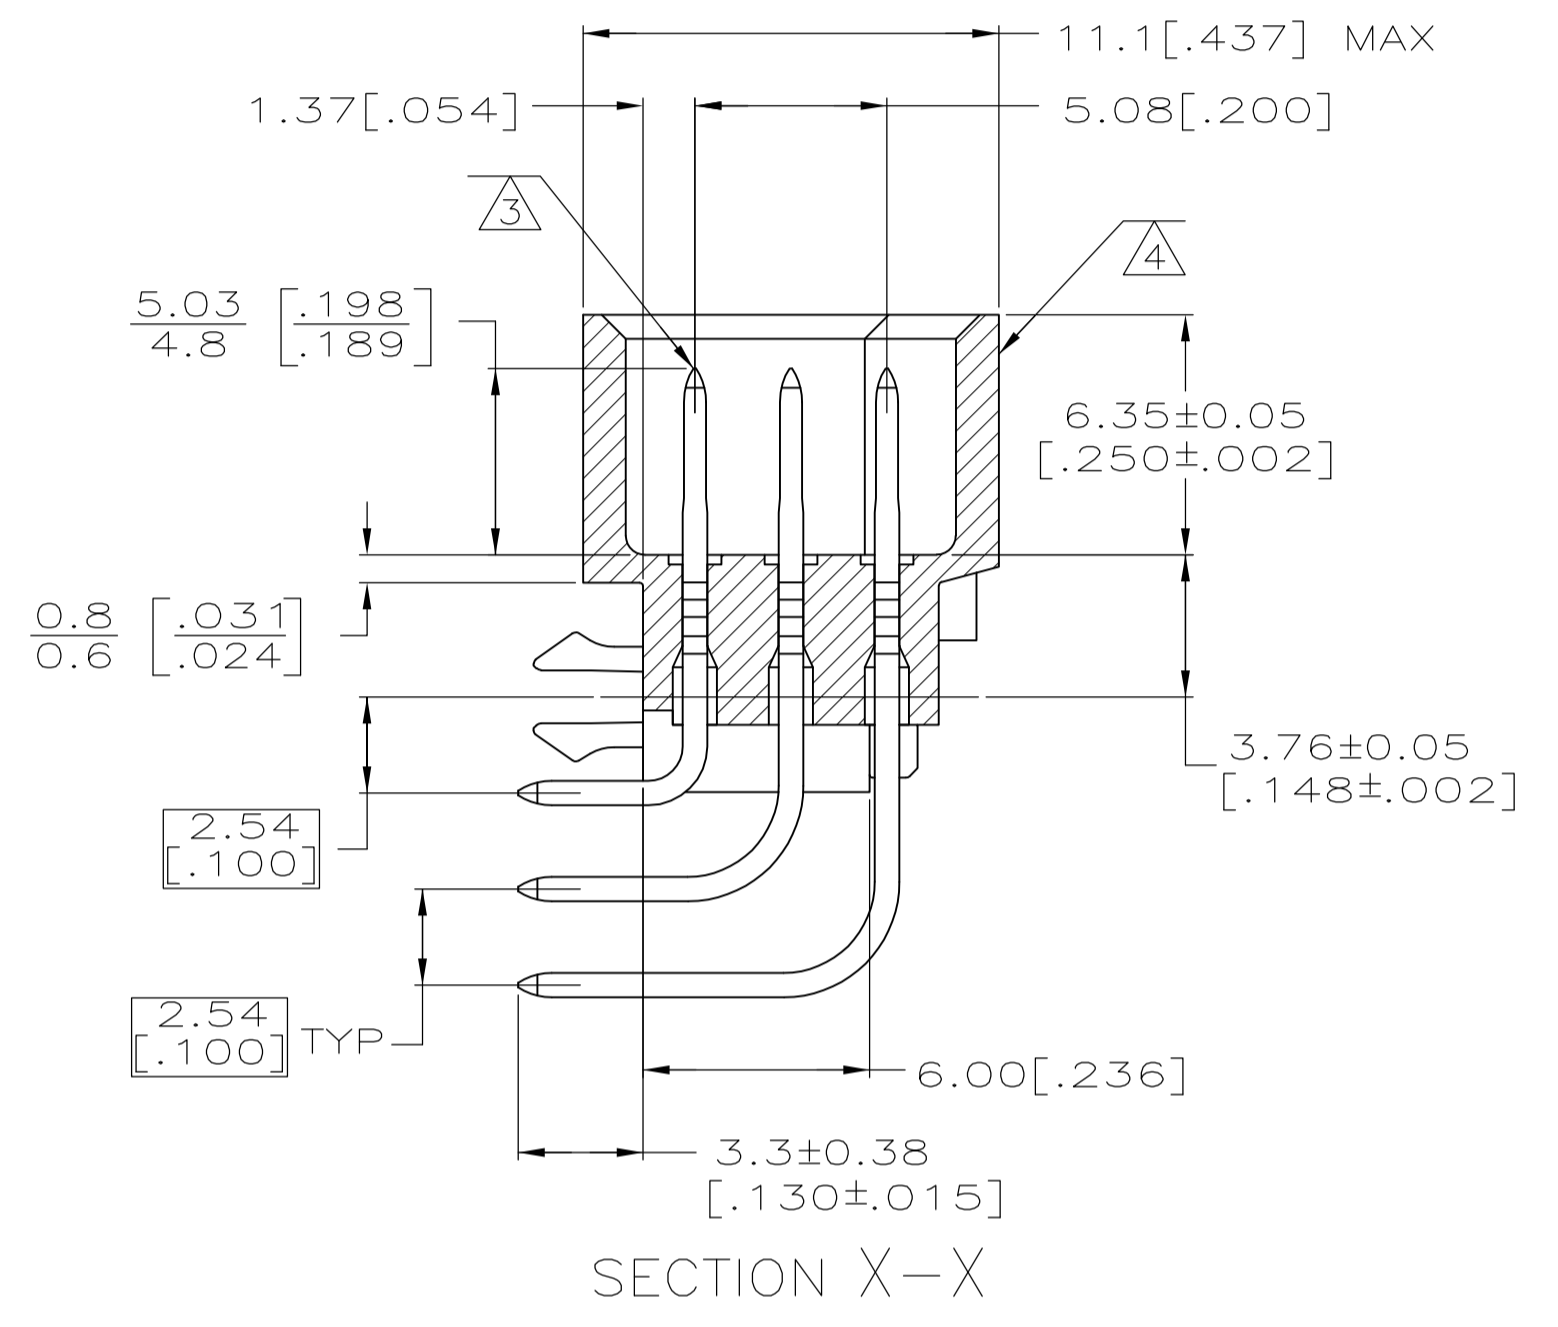

SECTION X-X

1-32	X	X	X	96	5536405-5
POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. POLIGNONE		Tyco Electronics Corporation	
DIMENSIONS: mm [INCHES]		CIRK A. SHARPE		Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. SHARPE		NAME	
0 PLC	± -	PRODUCT SPEC		ASSEMBLY, PIN, EUROCARD, TYPE C,	
1 PLC	± -	APPLICATION SPEC		96 POSITION, 3.30[.130] SOLDER POST,	
2 PLC	± 0.13[.005]	SIZE		DRAWING NO	
3 PLC	± -	WEIGHT		5536405	
4 PLC	± -	CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV 01	
ANGLES	± -				