

AMY-35-W-B

~36° wide beam. Assembly with holder B compatible with Ø35 mm BJB and B+W connectors. Black version.

SPECIFICATION:

Dimensions	Ø 34.9 mm
Height	11 mm
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish
AMY-35-W	Single lens	PMMA	clear	
AMY-35-HLD-B	Holder	PC	black	


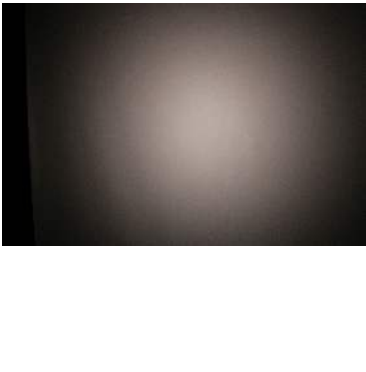
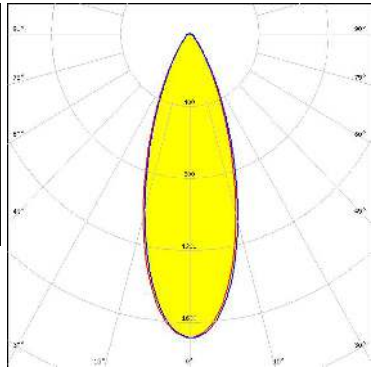

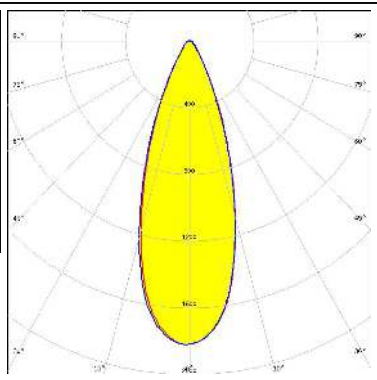

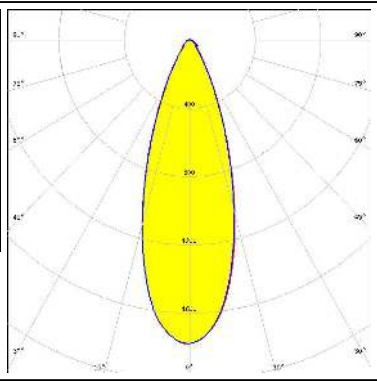
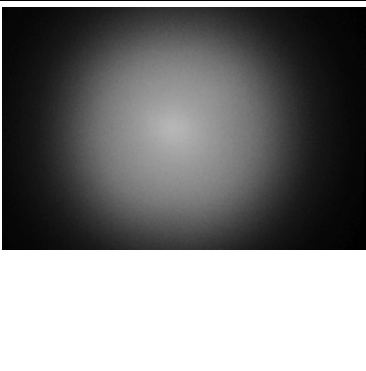
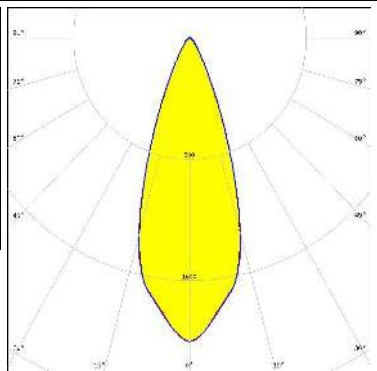
ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CP17972_AMY-35-W-B » Box size: 480 x 280 x 300 mm	1320	132	66	9.4

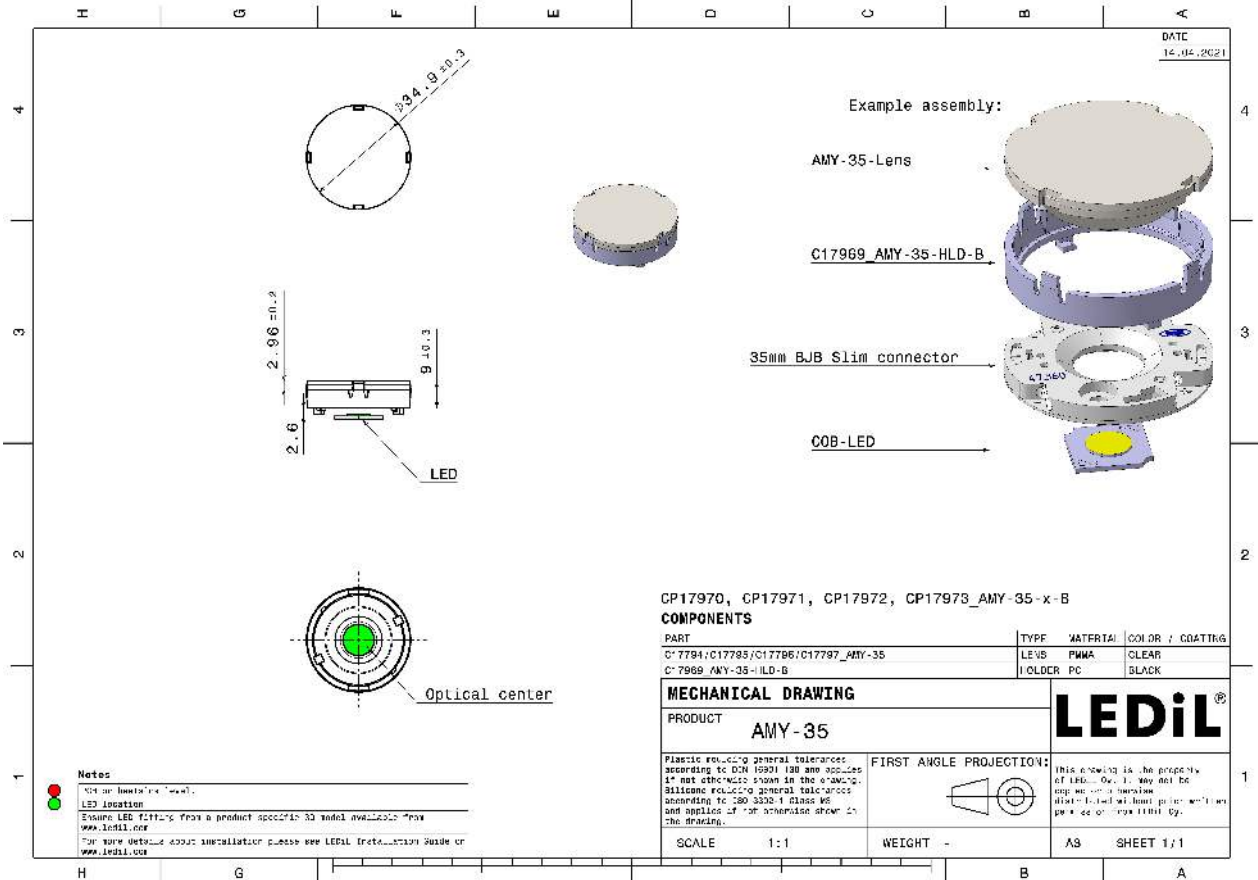

See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (MEASURED):

<p></p> <p>LED Vesta TW 6mm DP FWHM / FWTM 36.0° / 68.0° Efficiency 87 % Peak intensity 1.7 cd/lm LEDs/each optic 1 Light colour Tunable White Required components: Bender Wirth: 504 Typ B35L</p>		
<p>CITIZEN</p> <p>LED CLU700/701/702/703 FWHM / FWTM 36.0° / 65.0° Efficiency 90 % Peak intensity 1.8 cd/lm LEDs/each optic 1 Light colour White Required components: Bender Wirth: 634a Bayonet35L</p>		
<p>CITIZEN</p> <p>LED CLU700/701/702/703 FWHM / FWTM 35.0° / 66.0° Efficiency 89 % Peak intensity 1.8 cd/lm LEDs/each optic 1 Light colour White Required components: BJB: 47.360.1020</p>		
<p>CITIZEN</p> <p>LED CLU7L3 FWHM / FWTM 37.0° / 61.0° Efficiency 91 % Peak intensity 2 cd/lm LEDs/each optic 1 Light colour White Required components: Bender Wirth: 667a Bayonet35</p>		

OPTICAL RESULTS (MEASURED):


CITIZEN

LED CLU7S3
 FWHM / FWTM 36.0° / 62.0°
 Efficiency 91 %
 Peak intensity 2 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 667a Bayonet35

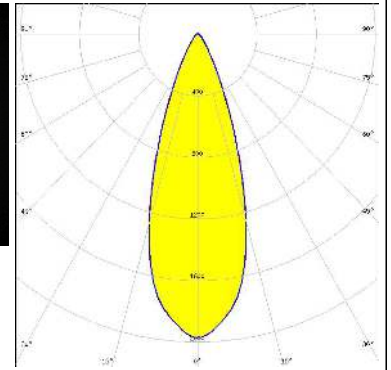


CREE LED

LED CMU10xx
 FWHM / FWTM 37.0° / 75.0°
 Efficiency 87 %
 Peak intensity 1.4 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.360.1020

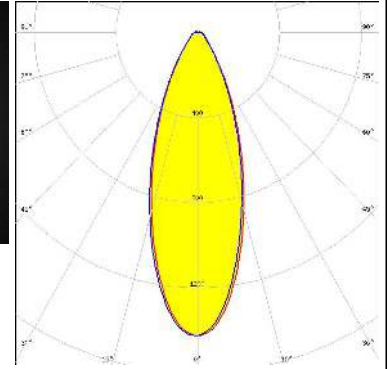



LUMILEDS

LED LUXEON 7070
 FWHM / FWTM 35.0° / 66.0°
 Efficiency 90 %
 Peak intensity 1.8 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 634a Bayonet35L

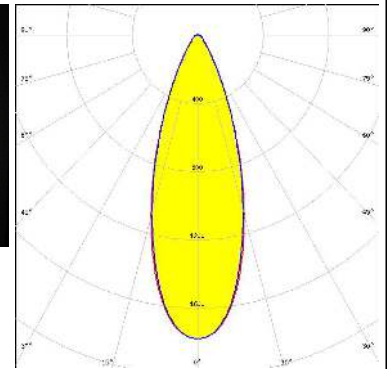
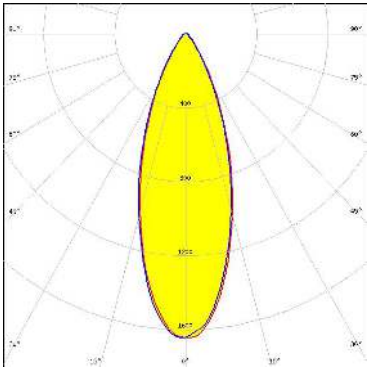

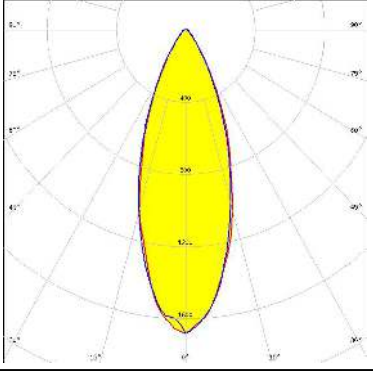

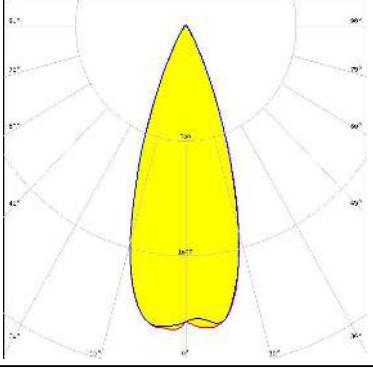




LUMINUS


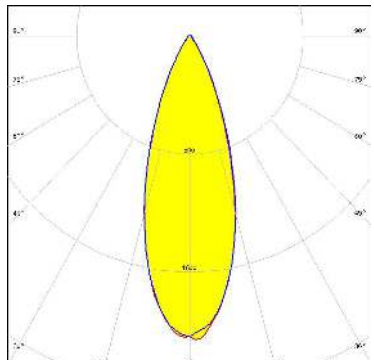

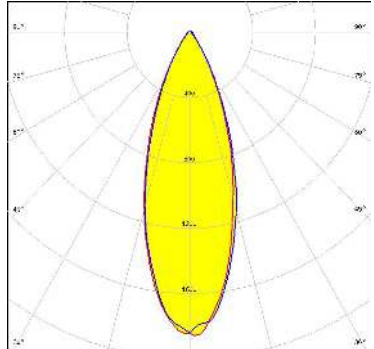
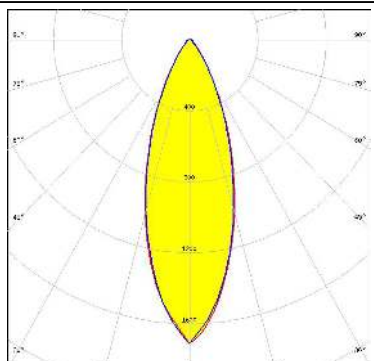
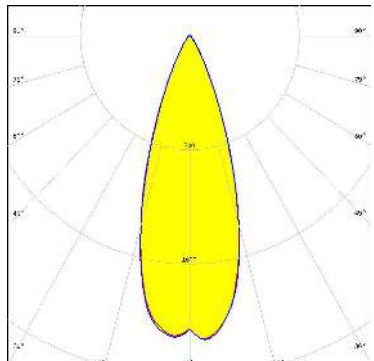
LED CTM-9 (Tunable White)
 FWHM / FWTM 38.0° / 75.0°
 Efficiency 85 %
 Peak intensity 1.4 cd/m
 LEDs/each optic 1
 Light colour Tunable White
 Required components:
 Bender Wirth: 495 Type B35L

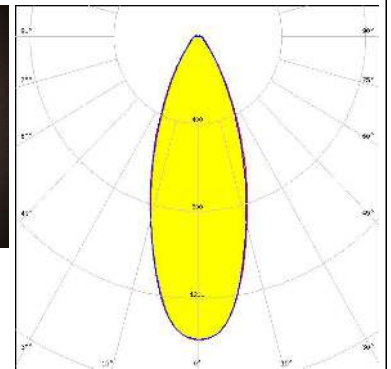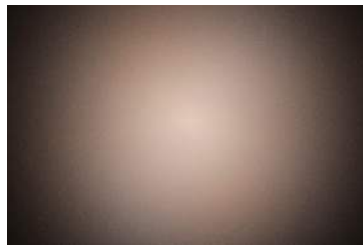

OPTICAL RESULTS (SIMULATED):

<p></p> <p>LED V10 Gen 8 FWHM / FWTM 37.0° / 70.0° Efficiency 86 % Peak intensity 1.7 cd/lm LEDs/each optic 1 Light colour White Required components: BJB: 47.360.1020</p>	
<p></p> <p>LED V10 Gen 8 FWHM / FWTM 36.0 + 37.0° / 71.0 + 70.0° Efficiency 89 % Peak intensity 1.7 cd/lm LEDs/each optic 1 Light colour White Required components: Bender Wirth: 634b Bayonet35L</p>	
<p></p> <p>LED V3 HD Gen 8 FC FWHM / FWTM 38.0° / 58.0° Efficiency 94 % Peak intensity 2.2 cd/lm LEDs/each optic 1 Light colour White Required components: Bender Wirth: 634c Bayonet35L</p>	
<p></p> <p>LED V6 HD Gen 8 FWHM / FWTM 35.0 + 36.0° / 63.0° Efficiency 92 % Peak intensity 2.1 cd/lm LEDs/each optic 1 Light colour White Required components: Bender Wirth: 634c Bayonet35L</p>	


OPTICAL RESULTS (SIMULATED):

<p></p> <p>LED Vesta DTW 6mm</p> <p>FWHM / FWTM 35.0 + 36.0° / 62.0 + 63.0°</p> <p>Efficiency 91 %</p> <p>Peak intensity 2.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: Bender Wirth: 652b Bayonet35L</p>	
<p></p> <p>LED Vesta DTW 9mm (4W/6W/12W)</p> <p>FWHM / FWTM 35.0 + 36.0° / 67.0°</p> <p>Efficiency 90 %</p> <p>Peak intensity 1.9 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: Bender Wirth: 652b Bayonet35L</p>	
<p>CITIZEN</p> <p>LED CLL02x/CLU02x (LES10)</p> <p>FWHM / FWTM 35.0° / 70.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 1.7 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.360.1020</p>	
<p>CITIZEN</p> <p>LED CLU7A2/7A3</p> <p>FWHM / FWTM 36.0° / 60.0°</p> <p>Efficiency 91 %</p> <p>Peak intensity 2.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.360.1020</p>	

OPTICAL RESULTS (SIMULATED):


CITIZEN

LED CLU7B2
 FWHM / FWTM 36.0° / 58.0°
 Efficiency 92 %
 Peak intensity 2.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.360.1020

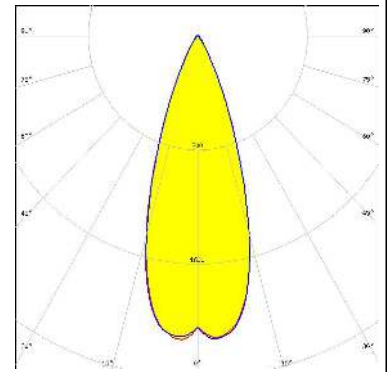


CREE LED

LED CMA1306
 FWHM / FWTM 34.0° / 62.0°
 Efficiency 91 %
 Peak intensity 2.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 634c Bayonet35L

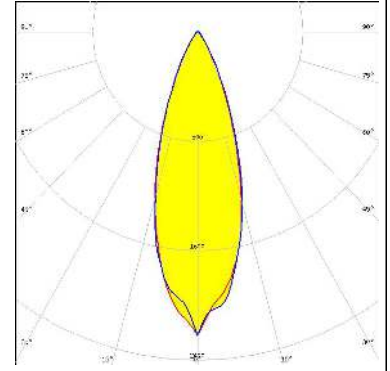


CREE LED

LED CXA/B 15xx
 FWHM / FWTM 36.0° / 68.0°
 Efficiency 87 %
 Peak intensity 1.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.360.1030



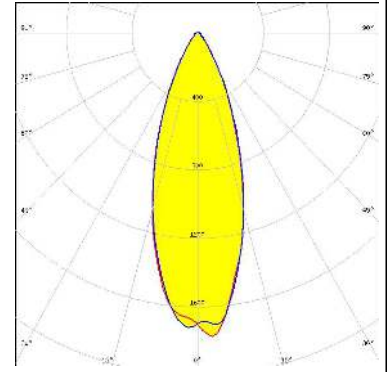


CREE LED

LED CXA/B 15xx
 FWHM / FWTM 36.0° / 69.0°
 Efficiency 86 %
 Peak intensity 1.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.360.1030

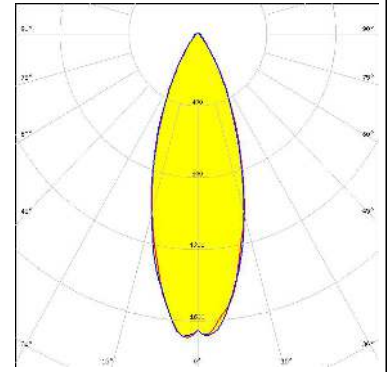

OPTICAL RESULTS (SIMULATED):
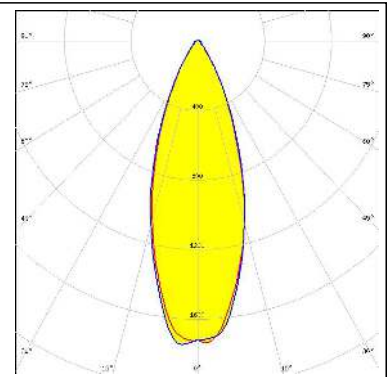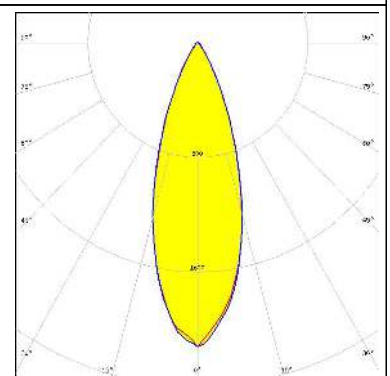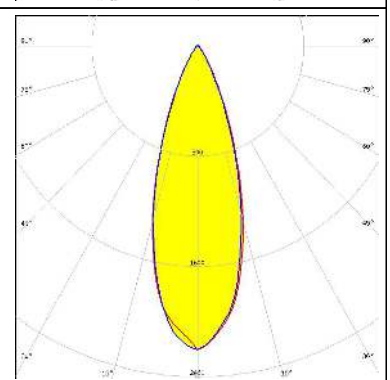
<p>LUMILEDS</p> <p>LED LUXEON CoB 1202/1203</p> <p>FWHM / FWTM 36.0° / 68.0°</p> <p>Efficiency 88 %</p> <p>Peak intensity 1.8 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.360.1110</p>	
<p>LUMILEDS</p> <p>LED LUXEON CoB 1202HD</p> <p>FWHM / FWTM 34.0° / 62.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 2.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: Bender Wirth: 652a Bayonet35L</p>	
<p>TRIDONIC</p> <p>LED SLE SNC8 LES06</p> <p>FWHM / FWTM 34.0° / 60.0°</p> <p>Efficiency 91 %</p> <p>Peak intensity 2.2 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.360.1020</p>	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)