



PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1690	MHz
Upper Frequency:	2062			MHz
Tuning Voltage:	0.3		4.7	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	+1.5	+4.5	+7.5	dBm
Supply Current:			20	mA
Harmonic Suppression (2 nd Harmonic):		-22	-8	dBc
Pushing:			8.0	MHz/V
Pulling, all Phases:		8.0	13.0	MHz pk-pk
Tuning Sensitivity:		145		MHz/V
Phase Noise @ 10kHz offset:		-94		dBc/Hz
Phase Noise @ 100kHz offset:		-115		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			15	pF
Operating Temperature Range:	0		+70	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$


FRONT

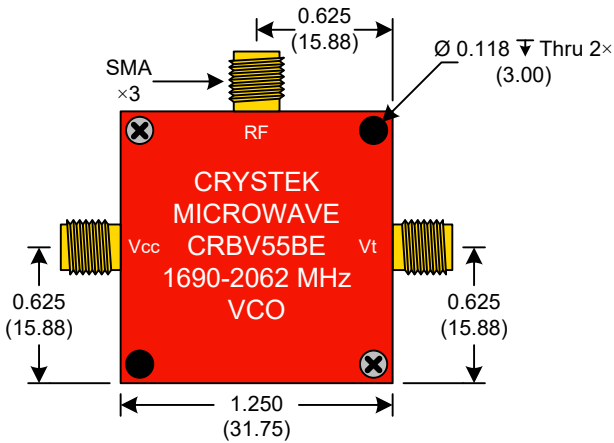

BACK

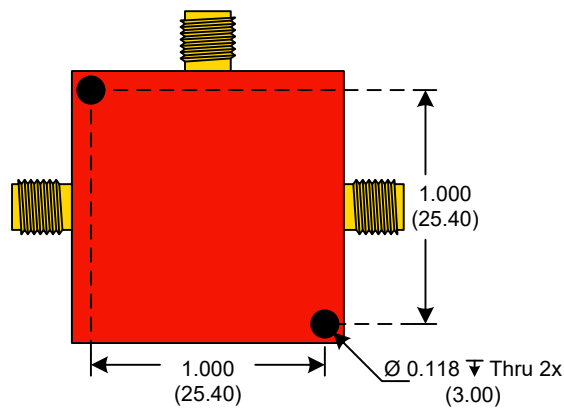

SIDE

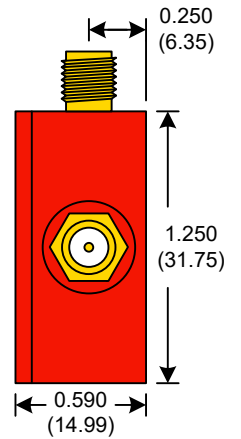


● Unless otherwise specified, Dimensions are in: $\frac{\text{IN}}{(\text{mm})}$


Product Control:

Crystek Part Number:	CRBV55BE-1690-2062	Release Date:	04-Nov-2020
Revision Level:	F	Responsible:	C. Vales






Phase Noise (1 Hz BW, Typical)

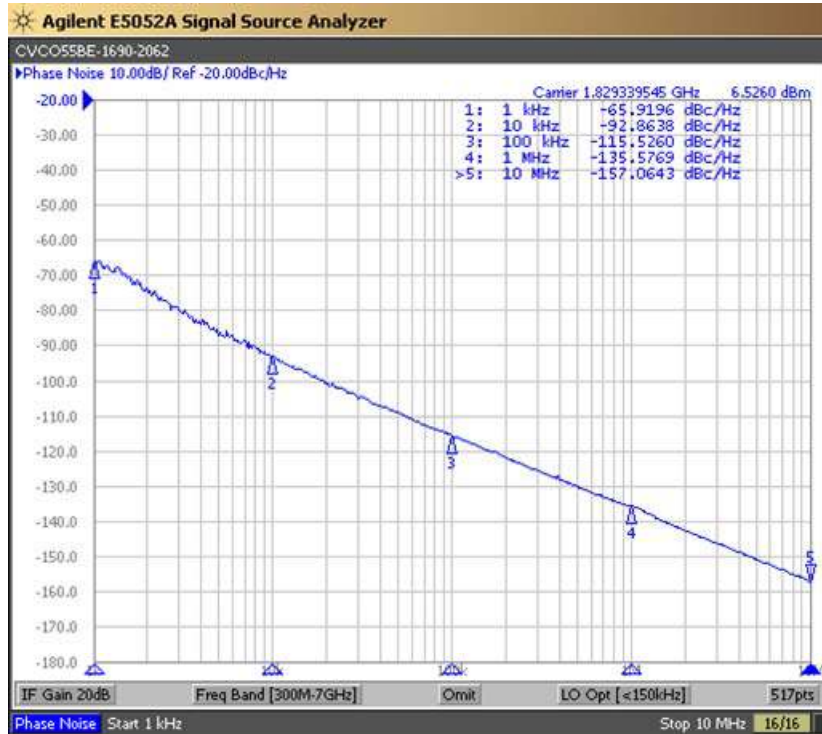

Tuning Curve (Typical)

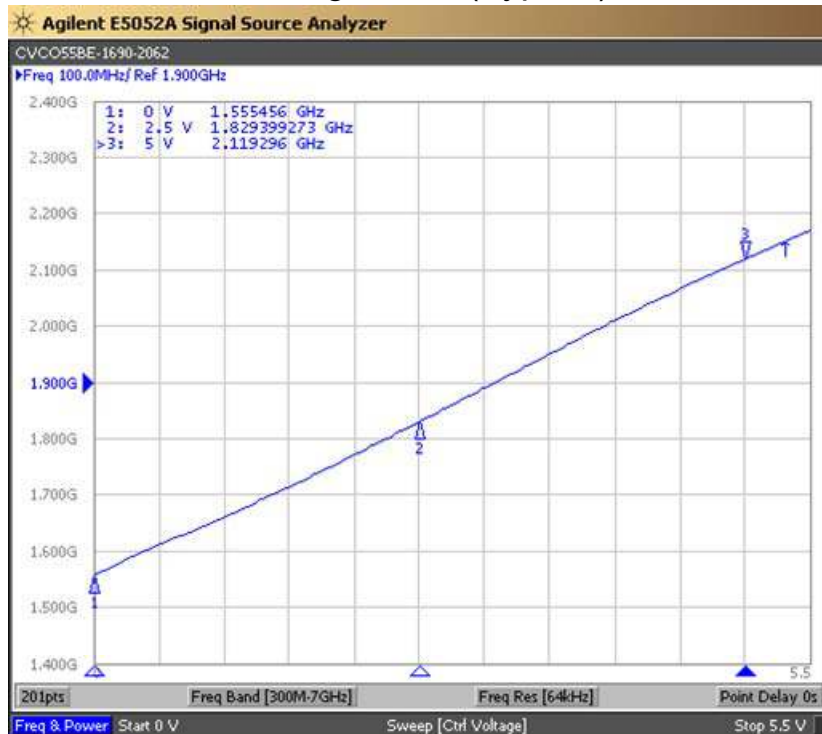

Product Control:

Crystek Part Number:	CRBV55BE-1690-2062	Release Date:	04-Nov-2020
Revision Level:	F	Responsible:	C. Vales

Crystek Corporation reserves the right to make changes to its products and/or information contained herein without notice. No liability is assumed as a result of its use or application.

