


	T	G	<b>T</b>	. m		0
_					_	

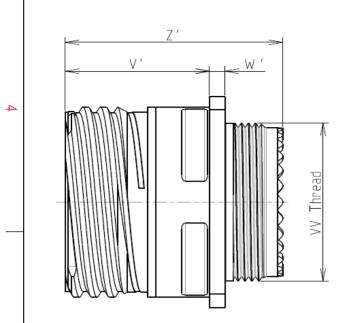

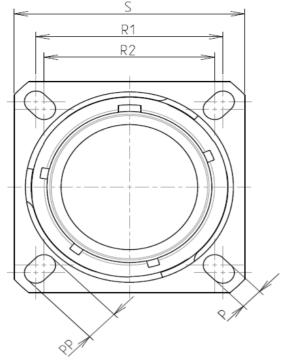



Keyin

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

 $\sim$ 

\_

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65°C to +200°C			

: 2000 hours

8D 0

G

11

-

Μ

04

Н

F

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V'	19.5+1.4/-0			
W'	2.1/3.65			
Ζ'	32 Max			
VV THREAD	M15x1-6g			

т		0	Φ		
S R1 R2					4
		LAYOUT SHOWN AS	EXAMPLE		3
g Shown as example Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 20.62 R2 18.26 S 26.2±0.3 V' 19.5+1.4/-0 W' 2.1/3.65 Z' 32 Max VV THREAD M15x1-6g		SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend Cour Ff PN: 8D011	which does not comply w of the Parties or by a thin lation, technical notice.) htry Jurisdiction & R Not I	ith	2
	A 07-10-2016 ISS DATE Designed By:	First Release Latest modification - by Date:	CUST	MOD N <sup>4</sup>	•
E	TITLE SCALE	Composi General linear	te Receptacle 8D		
ORIEN CONTACT TYPE : PIN (150	ITATION : E 00 Matings)	WWW.SOURIAU	СОМ	859 This document is the property of SOURIAU it must not be reproduced or communicated without permission	1
	DUT:11-04 FORMAT A3		U DRG N° ⁄I04HE-C	SHEET 1/2	
E	/ D	C	В	A	

r	Ŧ	ര	н <b>г</b>	m		0	
		Contact Layout					Panel Cutou
4	-x_	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement Numt size no. cont 11 -4 4	X-axis         Y-axis (mm)           +.065 (1.65)         .065 (1.65)           +.065 (1.65)        065 (1.65)          065 (1.65)        065 (1.65)          065 (1.65)         +.065 (1.65)          065 (1.65)         +.065 (1.65)          065 (1.65)         +.065 (1.65)          065 (1.65)         +.065 (1.65)          065 (1.65)         +.065 (1.65)          065 (1.65)         +.065 (1.65)			¥ 22	ØA.	<u>ØI</u>
ω			-			Dim ØA ØA/ R1 ØT	A
	-					SOURIAU shall not be I due to a use of the I the Specifications issued (professional ree	Products wh I by either of
N							Country FR
					A 07-10-20 ISS DATE Designed By:	116 First Release	3D011N
					TITLE	Cc Ger	omposite
					NA SOURIA		JRIAU.C
					FORMAT A3		URIAU D011M
	Н	G	F	E	D	C	

