



WEIGHT: 0.098oz. [2.781g]

RoHS Compliant
THIRD ANGLE PROJECTION
DO NOT SCALE DRAWING
PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ORBEL CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ORBEL CORPORATION IS PROHIBITED.

DIMENSIONS ARE IN INCHES [MILLIMETERS]		NAME	DATE
OLERANCES: RACTIONAL±	DRAWN	TNC	6/28/20
	CHECKED		
WO PLACE DECIMAL ± .015 [.381] HREE PLACE DECIMAL ± .010 [.254]	ENG APPR.		
MATERIAL:	MFG APPR.		
003" [.076] BeCu ALLOY 25, 1/2 HARD			
INISH:	COMMENTS	:	


CRBEL	1
ENGINEERED SOLUTIONS	ò

SIZE DWG NO. A 30B19-BFA024000T			REV.	
SCALE: 2:1		CAGE CODE: 57DU2	SHEET	1 OF 1

HOW TO ORDER FINGER-STOCK GASKETS

The chart below is an easy-to-use reference on how Orbel finger-stock gasket part numbers are created and used to order standard and custom gaskets. Custom configurations that fall outside of our standard gasket styles are also available.

Sample Part Number: 30B09-BFA024000T

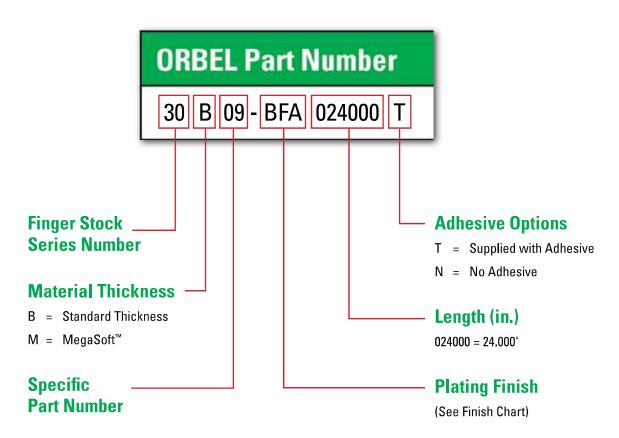

PLATING FINISHES					
Finish Type	Finish Code	Finish Type	Finish Code		
SILVER	AGA	NICKEL, ELECTROLESS	NIP		
GOLD .000050" MIN	AUA	TIN/LEAD 90/10, MATTE	РВА		
GOLD .000050" MIN with NICKEL FLASH UNDERPLATE	AUK	TIN/LEAD 60/40, MATTE	РВВ		
BRIGHT FINISH, UNPLATED	BFA	TIN/LEAD 90/10, BRIGHT	PBC		
BRIGHT FINISH, SOLDERABLE	BFS	TIN/LEAD 60/40, BRIGHT	PBD		
CADMIUM + CLEAR CHROMATE	CDA	TIN, BRIGHT	SNA		
CADMIUM + YELLOW CHROMATE	CDB	TIN, MATTE	SNB		
NICKEL, BRIGHT	NIA	ZINC + CLEAR CHROMATE	ZNA		
NICKEL, MATTE OR SULFAMATE NICKEL	NIB	ZINC + YELLOW CHROMATE	ZNB		

All plating thicknesses are .0001" min. except where noted.