


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/27/21	
A		UPDATE SPEC.	9/6/22	LH/AC1

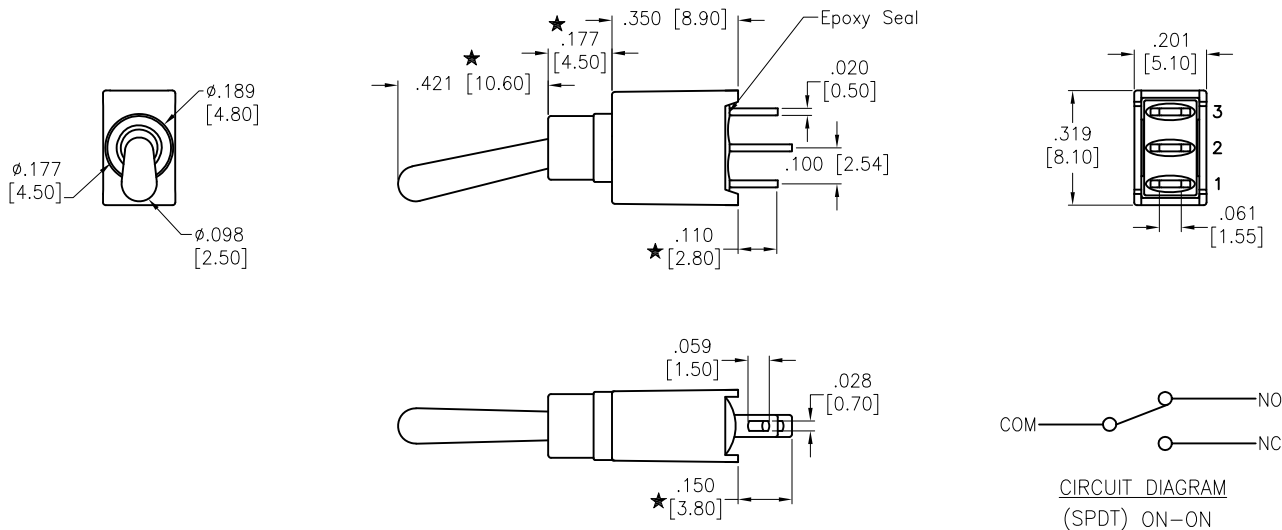

SW-T3-2B-A-T3-X-05

Coding	(Internal) Movable Contact	Terminal Plating
S	Silver Plated	Silver (Gold over silver Term.)
T		Silver (Tin over silver Term.)
R	Gold Plated	Gold Plated
K		Gold Plated (Tin Plated Term.)

**SPECIFICATIONS:**

Material:  
 Movable contact: Copper Alloy, See Chart  
 Terminals: See Chart  
 Electrical:  
 Rating: 3 Amps with resistive load @ 125VAC or 28VDC  
 1.5 Amps with resistive load @ 250VAC  
 Contact resistance: 20 mohms max initial  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1500V RMS @ sea level  
 Electrical life: 30,000 make and break cycles at full load  
 Temperature Rating:  
 Operating temperature: -30°C to +85°C  
 Environmental:  
 IP Class: IP67  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.x	± .10	Øx	± .10
.xx	± .020	Øxx	± .015
.xxx	± .015	Øxxx	± .010



909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

DRAWN	JJ	9/27/21
CHECKED	RC	9/27/21
APPROVED		

TITLE: POWER TOGGLE SWITCH, TOGGLE  
 SUB-MINIATURE, SPDT, ON-ON, SOLDER TYPE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

SIZE	PART NO.	REV.
X	SW-T3-2B-A-T3-X-05	A

REF: S00198T SCALE: NTS SHEET 1 OF 1