

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.




The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU & 2015/863/EU for RoHS compliant and per IEC 61249-2-21 for Halogen-Free compliant.



ORIGINAL








REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	BY
F1	NE-17304	ADD PANEL CUT OUT	2017-12-30	Sondra Sang
A2	NE-21035	UPDATE 7.2&14.4 TOLERANCE AND ADD SPRING DIM	2021-03-15	Debby Hung

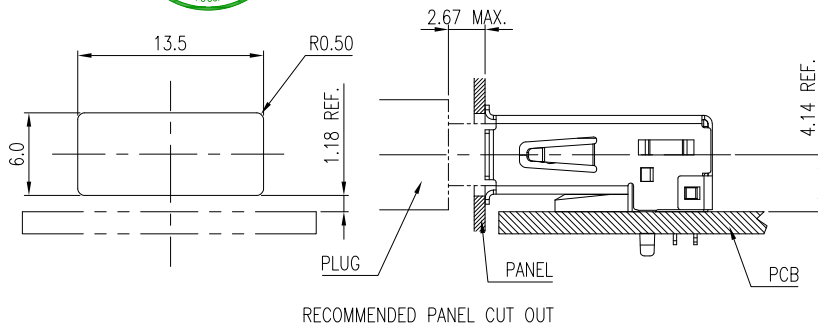

PIN #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	SSRX-
6	SSRX+
7	GND_DRAIN
8	SSTX-
9	SSTX+
SHELL	SHIELD

PIN ASSIGNMENT

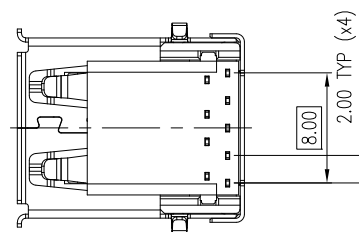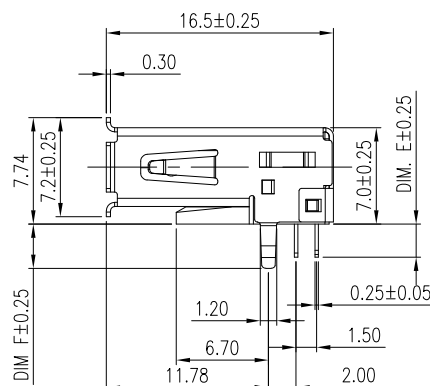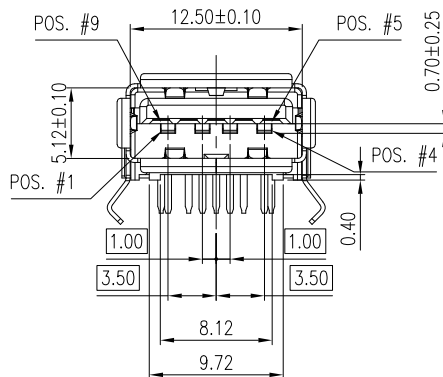

PART NUMBER: GSB3 111 X X X HR

CONTACT FINISH


- 1: GOLD FLASH
- 2: 15µ" GOLD
- 3: 30µ" GOLD

SOLDER TAIL LENGTH / PACKAGE OPTION

PART NO	DIM. E	DIM. F	PACKAGE
GSB3111XXHR	2.40	3.20	TRAY
GSB3111X1HR	3.00	3.60	TRAY
GSB3111X3HR	2.17	3.20	TRAY
GSB3111X5HR	2.40	3.20	T&R
GSB3111X6HR	3.00	3.60	T&R
GSB3111X7HR	2.17	3.20	T&R

INSULATOR AND COLOR

- 1: LCP, Blue
- 3: LCP, Black

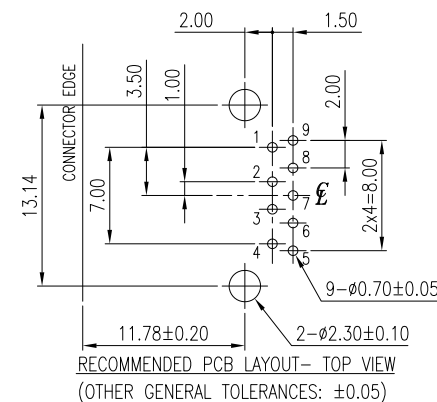

- NOTES:
1. HOUSING: HIGH TEMPERATURE THERMOPLASTIC OPTIONS UL 94V-0 COLOR-OPTIONS
 2. BOTTOM COVER: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0, COLOR:OPTIONS
 3. CONTACT: COPPER ALLOY, 0.25mm THICKNESS, SELECTIVE GOLD PLATING ON CONTACT AREA, 120µ" MIN. MATTE TIN PLATED ON SOLDERING TAIL, 80µ" MIN. NICKEL UNDER-PLATED OVERALL
 4. METAL SHELL: COPPER ALLOY, 0.3mm THICKNESS, 50µ" MIN. NICKEL UNDER-PLATED OVERALL
 5. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2011/65/EU & 2015/863/EU FOR RoHS COMPLIANT. AND PER IEC 61249-2-21 FOR HALOGEN-FREE COMPLIANT.
 6. P/N: GSB31113XXXHR PRODUCT SPECIFICATION REFER TO: PS-7411
P/N: GSB31111XXXHR/GSB31112XXXHR PRODUCT SPECIFICATION REFER TO: PS-7440

TOLERANCE	APPROVALS	DATE	TITLE	UNIT	SIZE	PART No.
X. X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	DRAWN Debby Hung	2021-03-15	USB 3.0 CONNECTOR STANDARD A R/A DIP TYPE	mm	A3	GSB3111XXXHR
ANGULAR ±1°	CHECKED Sandy Wu	2021-03-15				
UNLESS OTHERWISE SPECIFIED	APPROVED Roger Tsai	2021-03-15	UNIT SCALE	mm NA	SIZE SHEET	A3 1 OF 3
	DWG TYPE CUST DWG	PROJECT CODE OTHER				DWG No. GSB3111XXXHR
						REV. A2

Amphenol[®]
Amphenol Corporation
Amphenol Taiwan Corporation

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.



The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU & 2015/863/EU for RoHS compliant and per IEC 61249-2-21 for Halogen-Free compliant.



ORIGINAL




REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	BY
F1	NE-17304	ADD PANEL CUT OUT	2017-12-30	Sondra Sang
A2	NE-21035	UPDATE 7.2&14.4 TOLERANCE AND ADD SPRING DIM	2021-03-15	Debby Hung


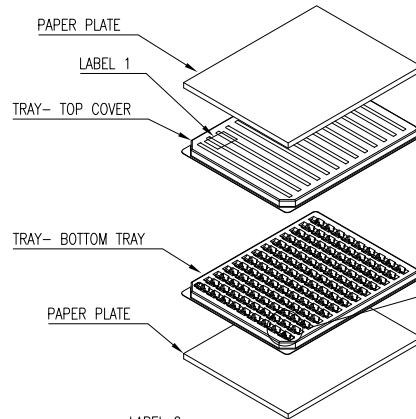


P/N : GSBX1113XXHR GSB311131HR	
QTY : 117	LABEL 1 = QTY : 117
117	LABEL 2 = QTY : 2340
P/O : 411-012345-001 411-012345-001	
DATE : 07 / 31 / 2009 MM / DD / YYYY	
G.W : 15.00 KG	HF
Amphenol Taiwan Corporation	


LABEL 1 & LABEL 2

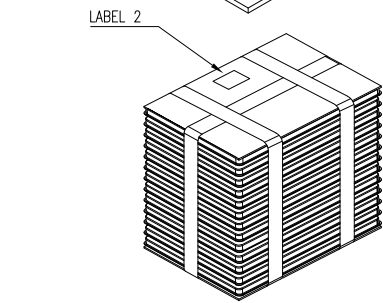

TOTAL 20 LAYERS TRAYS

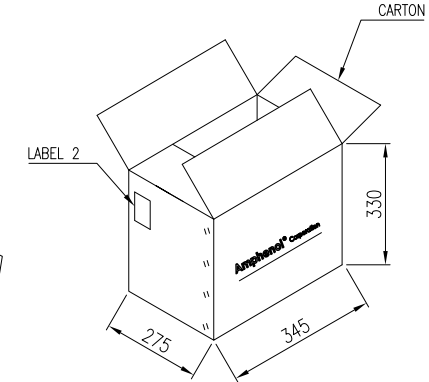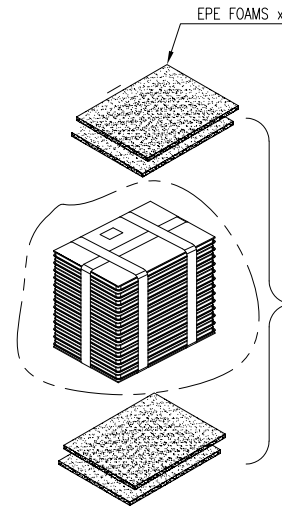

- NOTES:
1. MATERIAL: TRAY- PET
 2. THICKNESS: 0.80 mm MINIMUM
 3. THE BARCODE MUST BE 3 OF 9 BARCODE
 4. COMPONENTS LOAD PER THE TRAY: 117 PCS.
 5. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2011/65/EU FOR RoHS COMPLIANT
 6. TRAY SIZE : 333 X 265 X 15.6 mm

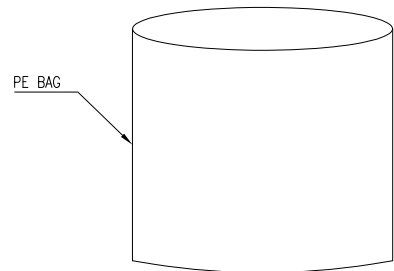

PART NO.	PCS. / TRAY	TRAY / CARTCON	N.W.	G.W.
GSBX1113XXHR	117 PCS.	117X20=2340 PCS.	6.0	9.4

(***) FOR REFERENCE

TOLERANCE	APPROVALS	DATE	TITLE	PART No.	
X. ±0.30	DRAWN Debby Hung	2021-03-15	USB 3.0 CONNECTOR STANDARD A R/A DIP TYPE	Amphenol® Amphenol Corporation	
X.X ±0.20	CHECKED Sandy Wu	2021-03-15		Amphenol Taiwan Corporation	
X.XX ±0.10	APPROVED Roger Tsai	2021-03-15		UNIT mm	SIZE A3
ANGULAR ±1°	DWG TYPE CUST DWG	PROJECT CODE OTHER		SCALE NA	SHEET 2 OF 3
UNLESS OTHERWISE SPECIFIED				DWG No. GSB31113XXHR	REV. A2

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU & 2015/863/EU for RoHS compliant and per IEC 61249-2-21 for Halogen-Free compliant.



ORIGINAL






REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	BY
F1	NE-17304	ADD PANEL CUT OUT	2017-12-30	Sondra Sang
A2	NE-21035	UPDATE 7.2&14.4 TOLERANCE AND ADD SPRING DIM	2021-03-15	Debby Hung

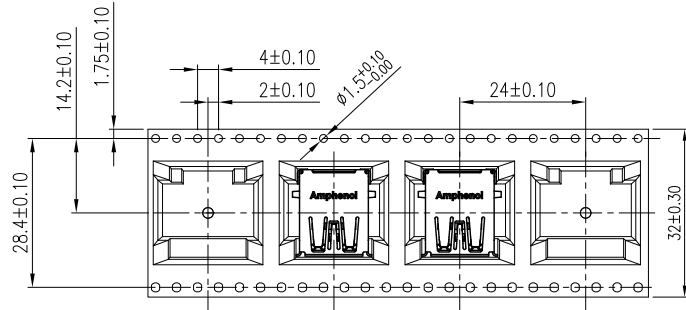

REEL SIZE	PARTS PER CARTON<S.P.Q>	PARTS PER REEL	TOTEL REEL PER CARTON
Ø330	3520	220	16

- NOTES:
1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON. ALL CARTON CLOSURES MUST BE DONE WITH TAPE.
 2. FILL PACKAGING TRAYS WITH THE QUANTITIES AS INDICATED IN THE CHART.
 3. SHIPPING CARTON DIMENSION: 690 X 360 X 325mm.
 4. NET WEIGHT: 8.4 KG.
GROSS WEIGHT: XX KG.

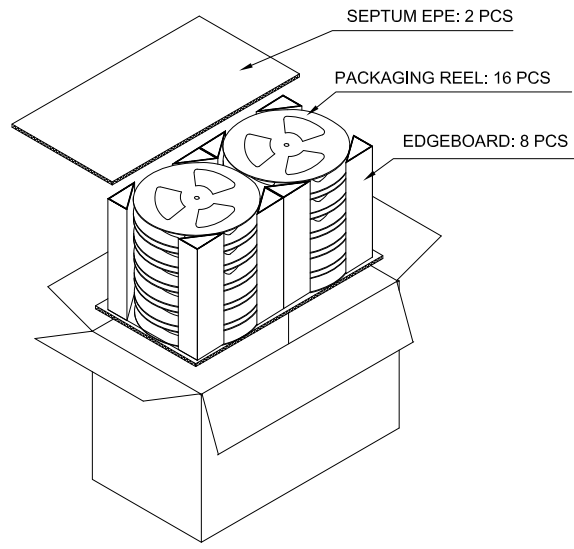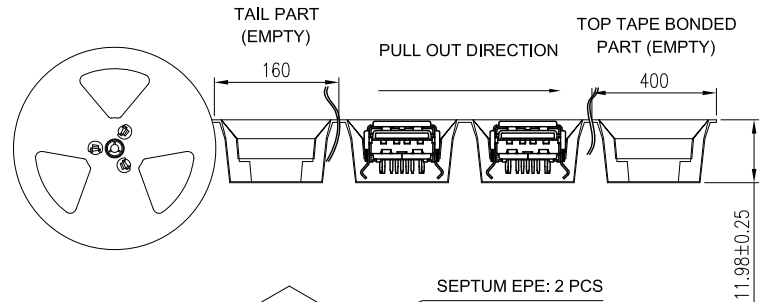

TOLERANCE	APPROVALS	DATE	TITLE		PART No.		
X. ±0.30	DRAWN Debby Hung	2021-03-15	USB 3.0 CONNECTOR STANDARD A R/A DIP TYPE		Amphenol® Amphenol Corporation Amphenol Taiwan Corporation		
X.XX ±0.20	CHECKED Sandy Wu	2021-03-15					
X.XXX ±0.10	APPROVED Roger Tsai	2021-03-15					
ANGULAR ±1°	DWG TYPE CUST DWG	PROJECT CODE OTHER		UNIT mm	SIZE A3	PART No. GSB3111XXXHR	
UNLESS OTHERWISE SPECIFIED				SCALE NA	SHEET 3 OF 3	DWG No. GSB3111XXXHR	REV. A2