

## Surge protection device - C-UFB-24DC - 2797861

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Attachment plug with surge voltage coarse and fine protection, for coaxial signal interfaces, signal voltage 24 V.  
Connection: BNC socket/plug


The illustration shows version C-UFB- 5DC

### Product Features

- For insertion in the cable
- Ground connection via separately led cable



### Key commercial data

Packing unit	1 pc
GTIN	 4 017918 073541
Weight per Piece (excluding packing)	89.43 GRM
Custom tariff number	85363010
Country of origin	Germany

### Technical data

#### Dimensions

Height	93 mm
Width	25.4 mm
Length	25.4 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Degree of protection	IP20

# Surge protection device - C-UFB-24DC - 2797861

## Technical data

### General

Housing material	Aluminum
Color	black
Standards for air and creepage distances	VDE 0110-1
	IEC 60664-1
Mounting type	Connection-specific intermediate plugging
Type	Attachment plug
Direction of action	Line-Shield/Earth Ground

### Protective circuit

IEC test classification	C2
	C3
	D1
Maximum continuous operating voltage $U_C$	30 V DC
Maximum continuous voltage $U_C$ (wire-ground)	30 V DC
Nominal current $I_N$	185 mA (25 °C)
Operating effective current $I_C$ at $U_C$	$\leq 10 \mu A$
Residual current $I_{PE}$	$\leq 10 \mu A$
Nominal discharge current $I_n$ (8/20) $\mu s$ (Core-Earth)	10 kA
Nominal discharge current $I_n$ (8/20) $\mu s$ (Core-Shield)	10 kA
Total surge current (8/20) $\mu s$	10 kA
Max. discharge current $I_{max}$ (8/20) $\mu s$ maximum (Core-Earth)	10 kA
Output voltage limitation at 1 kV/ $\mu s$ (Core-Earth) spike	$\leq 65 V$
Output voltage limitation at 1 kV/ $\mu s$ (Core-Shield) spike	$\leq 65 V$
Output voltage limitation at 1 kV/ $\mu s$ (Core-Earth) static	$\leq 45 V$
Output voltage limitation at 1 kV/ $\mu s$ (Core-Shield) static	$\leq 45 V$
Residual voltage at $I_n$ , (conductor-ground)	$\leq 45 V$
Residual voltage at $I_n$ , (conductor-shield)	$\leq 45 V$
Voltage protection level $U_p$ (Core-Earth)	$\leq 120 V$ (C2 - 10 kV / 5 kA)
	$\leq 85 V$ (C1 - 1 kV/500 A)
	$\leq 60 V$ (C3 - 10 A)
Voltage protection level $U_p$ (Core-Shield)	$\leq 120 V$ (C2 - 10 kV / 5 kA)
	$\leq 60 V$ (C3 - 10 A)
	$\leq 85 V$ (C1 - 1 kV/500 A)
Voltage protection level $U_p$ static (core-ground)	$\leq 50 V$ (C1 - 1 kV/500 A)
	$\leq 70 V$ (C2 - 10 kV / 5 kA)
Response time $t_A$ (Core-Earth)	$\leq 500 ns$
Response time $t_A$ (Core-GND)	$\leq 500 ns$

# Surge protection device - C-UFB-24DC - 2797861

## Technical data

### Protective circuit

Input attenuation aE, asym.	2 dB ( $\leq$ 10 MHz)
Cut-off frequency fg (3 dB), asym. (PE) in 50 Ohm system	typ. 90 MHz
Cut-off frequency fg (3 dB), asym. (shield) in 50 Ohm system	typ. 90 MHz
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 - 10 kV / 5 kA
	D1 - 2,5 kA

### Connection data

Connection method	BNC 50 $\Omega$
Connection type IN	BNC socket
Connection type OUT	BNC plug

### Connection, equipotential bonding

Connection method	Screw connection
-------------------	------------------

### Standards and Regulations

Standards/regulations	IEC 61643-21
-----------------------	--------------

## Classifications

### eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807

### ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610

# Surge protection device - C-UFB-24DC - 2797861

## Classifications

UNSPSC

UNSPSC 13.2	39121620
-------------	----------

## Approvals

Approvals

---

Approvals

GOST

---

Ex Approvals

---

Approvals submitted


---

## Approval details

GOST
------

## Drawings

Circuit diagram

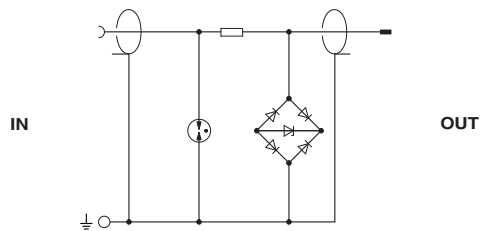

# Surge protection device - C-UFB-24DC - 2797861

Diagram

