

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 6
 Gauge: 24 AWG 0.22 mm²
 Material: tinned copper strands
 Strand size: ϕ 0.16 x 11
 Resistance at 20 °C: 94.2 Ω /km max

Insulator

Material: PVC
 Color: black, white, red, yellow, blue, green
 Diameter: ϕ 1.2 \pm 0.10 mm
 Nominal thickness: 0.28 mm
 Resistance at 20 °C: 10 M Ω /km min



Outer jacket

Material: PVC
 Color: white
 Diameter: ϕ 5.2 \pm 0.20 mm
 Nominal thickness: 0.80 mm

Wire marking: E339579 UL AWM STYLE 2464 24 AWG 80°C
 300V VW-1 - - - cUL AWM I/II A 80°C 300V FT1 TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 \pm 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 \pm 1 °C /1 hour, no observed degradation
 Deformation: 121 \pm 1 °C /1 hour, \leq 50 %
 Cold bend: -10 \pm 2 °C /1 hour, no observed cracking

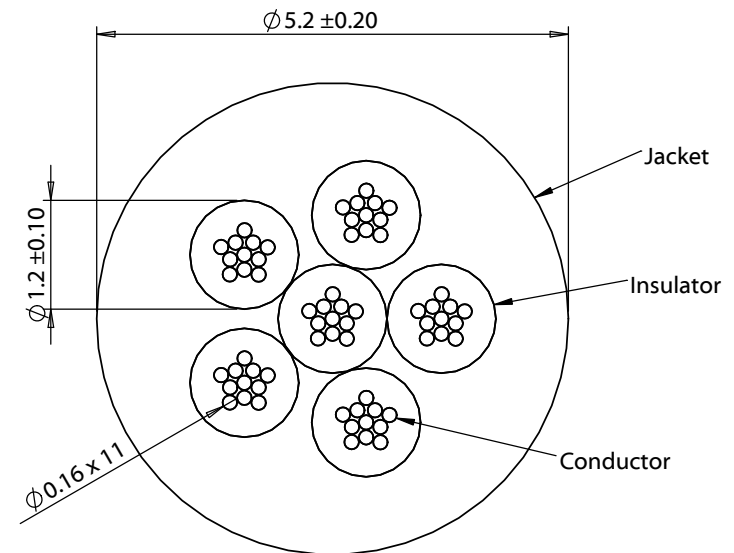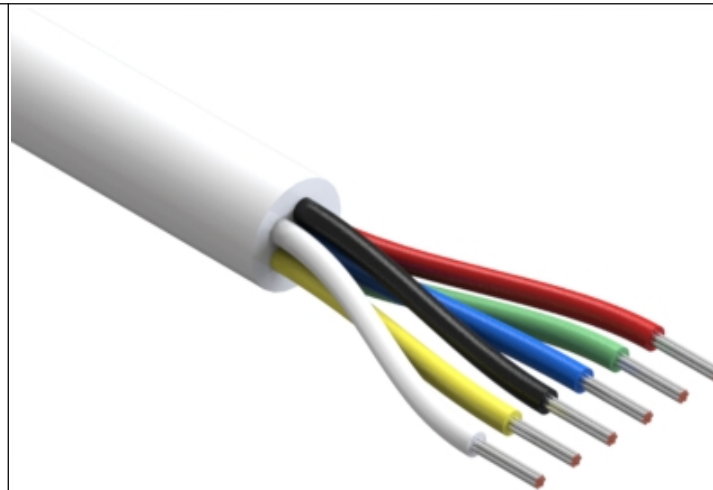

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
A	10/13/2015	Initial release	RS <small>Digitally signed by RS Date: 2018.09.06 16:08:21 -07'00'</small>			RoHS and REACH compliant
A1	01/26/2016	Updated dimensions	Verified:	Function test: no open, no short circuit, no intermittent	Description: Wire, 6C TS, 24 AWG, UL2464, 300V, 80C, 5.2 mm, VW-1, PVC, white	
A2	09/06/2018	Increased operating temperature range	PS <small>Digitally signed by PS Date: 2018.09.06 16:12:38 -07'00'</small>			
			Dimensions are in millimeters. Tolerances: X: \pm 0.5 mm X.X: \pm 0.3 mm X.XX: \pm 0.05 mm	Description:	Size:	Part number:
					A	30-00508
					Scale: 12:1	Sheet 1 of 1