

## AD2412N3L

24 Watts

**Total Power:** 24 Watts  
**Input Voltage:** 90 - 264 Vac  
**# of Outputs:** Single



### Special Features

- Universal AC input
- Fully regulated output
- EN61000-3-2 compliant
- Overcurrent and overvoltage protection
- High efficiency
- High MTBF
- IEC320 AC input receptacle 3 pin (type C14)
- Built in EMI filter
- (CISPR 22 Class B)
- LED power good indicator
- AC input fuse
- Efficiency Level V
- CE Mark EMC, LVD & ErP 2011
- Meets K.21 Basic Surge requirement

### Safety

- **UL** UL 60950-1
- **CSA** CSA-C22.2 no.60950
- **TUV** EN/IEC60950-1
- **CE Mark** LVD, EMC & ErP 2011
- **CCC** Certificate
- **CB** Certificate

## Electrical Specifications

### Input

Input range:	90 - 264 Vac (wide range)
Frequency:	47 - 63 Hz
Inrush current:	50 A maximum @ 230 Vac, cold start 25 °C
Input current:	1 A maximum
Efficiency:	82% typical
EMI/RFI:	FCC Part 15, Class B & EN55022 (CISPR 22) Class B
Safety ground leakage current:	250 $\mu$ A maximum@ 50/60 Hz, 264 Vac input

### Output

Maximum Power (Po):	24 W
Hold-up time:	20 ms. minimum at full load @ 115 Vac, 60 Hz
Overvoltage protection:	28 V Latching type, recycle AC to reset.
Overcurrent protection:	Output short circuit protection auto recover Overload protection @ 2.5 - 5A
Thermal protection:	Latching type, recycle AC to reset
Cable/connector :	DC cable with 2.5 mm I.D./ 5.5 mm O.D. center plug DC plug center +v DC plug outer -v

## Environmental Specifications


Operating temperature:	-5° to +50 °C ambient
Storage temperature:	-45 °C to +85 °C
Electromagnetic susceptibility:	Designed to meet EN61000-4-2, -4, -5, level 3; EN61000-4-3, -6, 6v/m; EN61000-3-3 and EN61000-3-2 Class A
Humidity:	Operating; non-condensing 5% to 90% RH > 850,000 hours at full load and 25 °C ambient conditions,
MTBF calculated:	Telcordia SR332 Issue 1 (Method 1, Case 3)

## Ordering Information

Model Number	Maximum Power	Output Voltage	Minimum Load	Maximum Load	Peak Load <sup>1</sup>	Regulation <sup>2</sup>	Ripple P/P (PAR) <sup>3</sup>
AD2412N3L	24 W	12 Vdc	0.1 A	2 A	2.4 A	±5%	< 120 mV

1. Peak current lasting 200ms every 3 seconds.
2. At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20MHz bandwidth and 10µF (tantalum capacitor) in parallel with a 0.1µF capacitor at rated line voltage and load ranges.
4. Power supply will operate with no load

## Mechanical Drawing

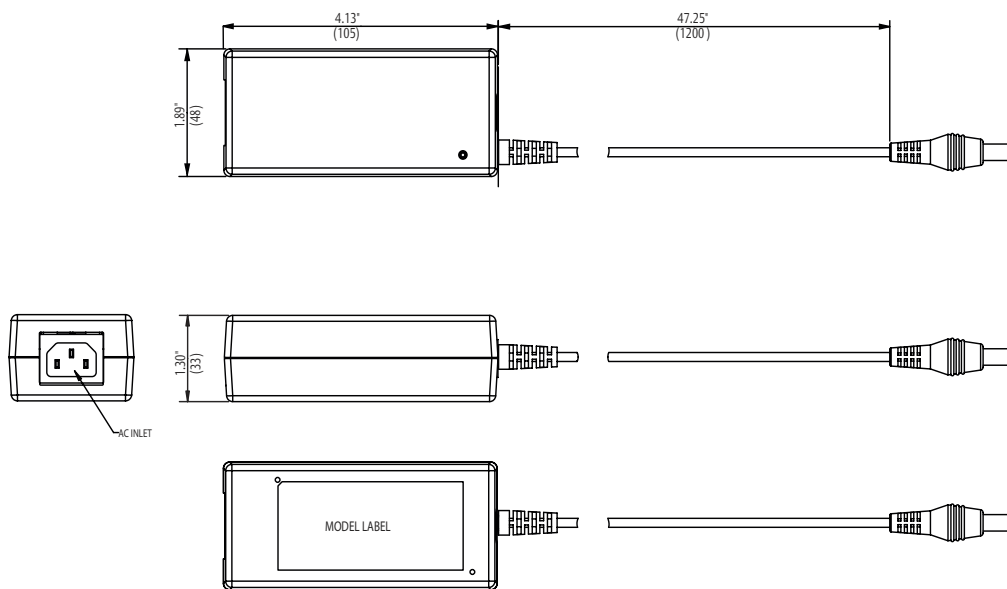

### Notes:

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is ± 0.02" (±0.5mm)
3. Warranty: 2 year
4. Weight: 0.61 lb./ 0.28 kg
5. AC input power cord sold separately
6. Specifications at factory settings at 115VAC input, 25 °C unless otherwise stated
7. AC Input Connector: IEC320, C13

## Americas

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698

## Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

## Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:

[www.Emerson.com/EmbeddedPower](http://www.Emerson.com/EmbeddedPower)  
[techsupport.embeddedpower@emerson.com](mailto:techsupport.embeddedpower@emerson.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

**Emerson Network Power.**  
The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

**EmersonNetworkPower.com**

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2011 Emerson Electric Co.