


This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

1 W DC - 1 GHz 1.6/5.6 male COAXIAL TERMINATION

issue
18.feb.93

Page
1 / 1

DRAWING



General tolerances: +/- 0.5 mm

R F CHARACTERISTICS


| | |
|-------------------------------|-----------------------|
| FREQUENCY RANGE | : DC - 1 GHz |
| IMPEDANCE | : 75 Ohms |
| DC RESISTANCE | : 75 Ohms ± 2% |
| V.S.W.R : | DC - 0.5 GHz : ≤ 1.08 |
| | 0.5 - 1 GHz : ≤ 1.15 |
| PEAK POWER at 25°C (1µs, 1%.) | : 500 W |
| AVERAGE POWER at 25°C | : 1 W |

MECHANICAL CHARACTERISTICS

| | |
|------------|-------------------------------|
| CONNECTORS | : 1.6/5.6 male per IEC 169-13 |
| WEIGHT | : < 10 g |

ENVIRONMENTAL CHARACTERISTICS

| | |
|----------------------------------|--------------|
| OPERATING TEMPERATURE RANGE (°C) | : -55 , +125 |
| STORAGE TEMPERATURE RANGE (°C) | : -55 , +125 |

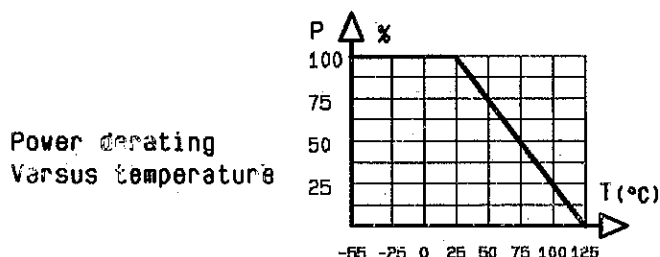

| | | | | |
|------------------|-----------|-------------|------|--|
| QUALITY Dpt app. | MO B | | | |
| CREATION | 18.feb.93 | New drawing | VE | |
| PEN : | 06.nov.92 | New format | FG | |
| EP : EP H 9301 | 20.sep.89 | New format | KL | |
| Nom : KL | | | | |
| Date: 12.sep.89 | ISSUE | REVISIONS | NAME | |