


REV	DESCRIPTION	DATE	DWN	APVD
B	REVISED PER ECO-14-014293	20SEP2014	NK	RH

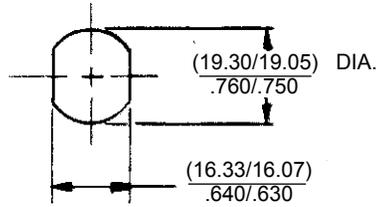

PANEL CUTOUT

SPECIFICATIONS:

CONTACT RATING:

SILVER - 3A @ 125 VAC OR 28 VDC (RESISTIVE)
 GOLD PLATING - 0.4 VA MAX @ 20 VDC OR PEAK AC.


CONTACT RESISTANCE:

SILVER - 10 MILLIOHMS MAX.
 GOLD PLATING - 20 MILLIOHMS MAX.

INSULATION RESISTANCE:

SILVER - 1000 MEGOHMS MIN.
 GOLD PLATING - 1000 MEGOHMS MIN. @ 500 VDC

DIELECTRIC STRENGTH: 1000 VOLTS RMS @ SEA LEVEL.

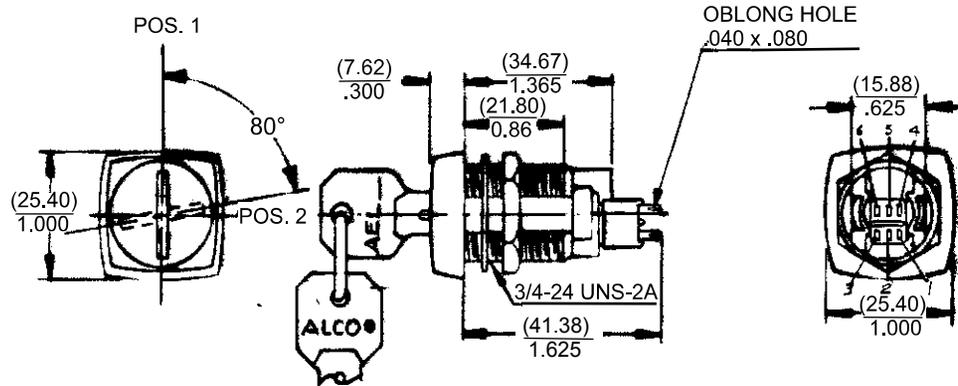

2 TO 3	2 TO 1	GOLD OVER NICKEL	POSITION 1 AND 2	SKT332GAEL01
5 TO 6	5 TO 4			
2 TO 3	2 TO 1	SOLID SILVER	POSITION 1 AND 2	SKT331GAEL01
5 TO 6	5 TO 4			
2 TO 3	2 TO 1	GOLD OVER NICKEL	POSITION 1 ONLY	SKT332AEL01
5 TO 6	5 TO 4			
2 TO 3	2 TO 1	SOLID SILVER	POSITION 1 ONLY	SKT331AEL01
5 TO 6	5 TO 4			
POS 2	POS 1	SWITCH CONTACTS	REMOVE KEY IN:	DESCRIPTIVE PART NUMBER
TERMINALS CONNECTED WHEN KEYS IS IN:				

TOLERANCES UNLESS NOTED:
 ± 0.10 IN ± 0.25 MM $\pm 5^\circ$ ANGLE

TITLE
 KEY LOCK SWITCH SKT-13 SERIES

STE TE Connectivity

DWG. NO. C-1437598-9

SHEET OF REV B