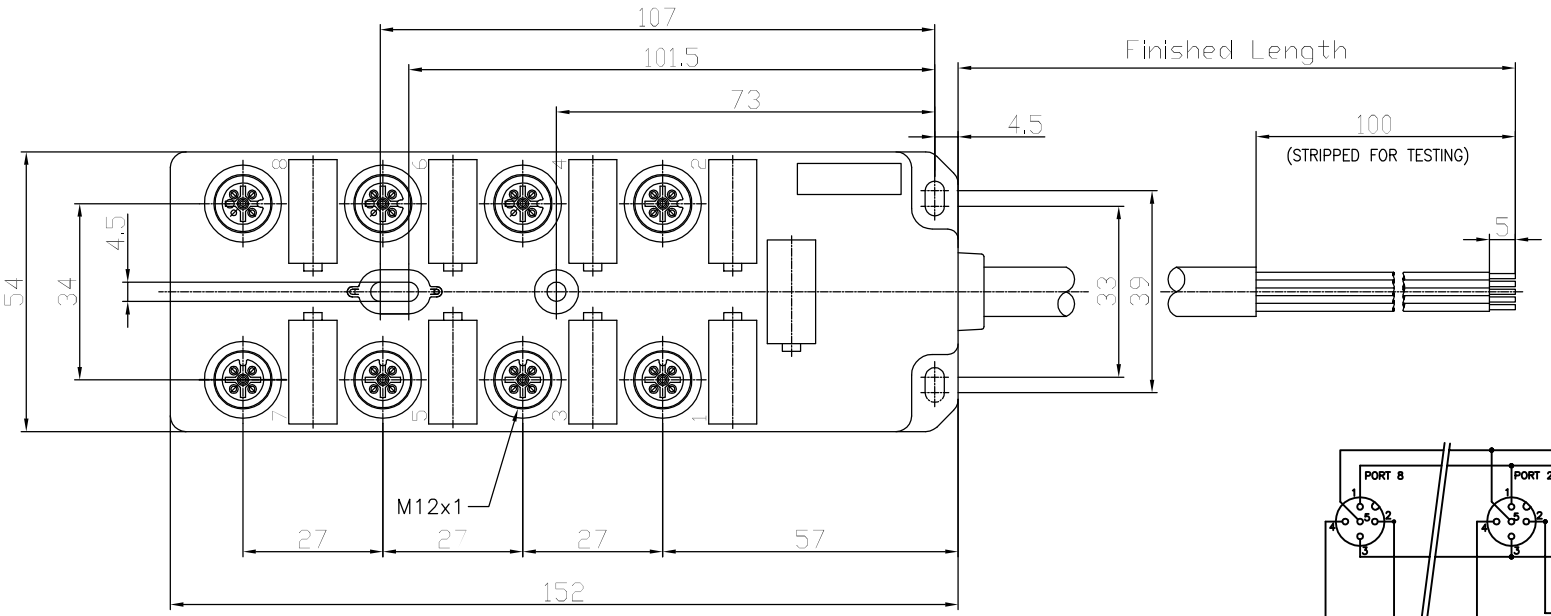

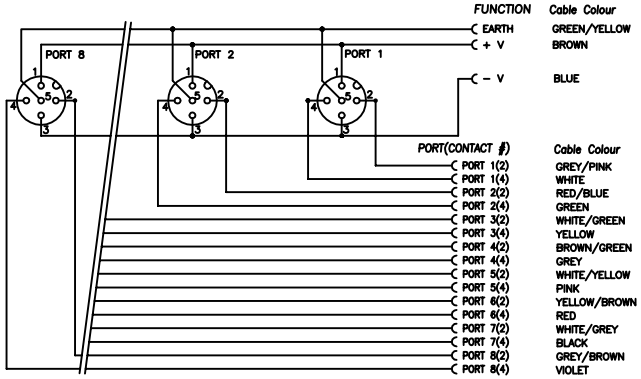

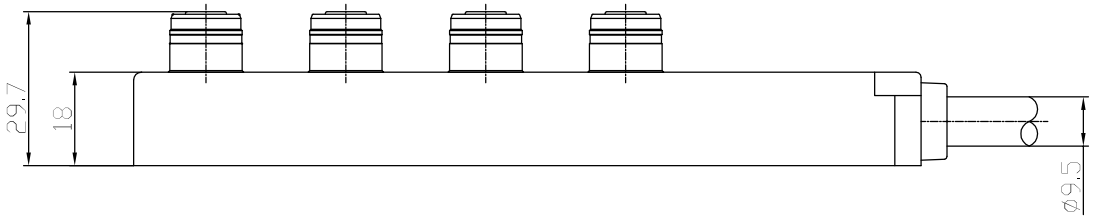

SPECIFICATION
MATERIALS:
HOUSING & INSERT: PBT YELLOW
COUPLING: BRASS-NICKEL PLATED
O-RING: VITON
ELECTRICAL:
VOLTAGE: 10-30 V DC
CURRENT RATING: 4A PER PORT, 12 AMPS MAX.
PROTECTION CLASS: IP68
OPERATING TEMPERATURE: -25°C to +70°C

NOTES:
FIXING HOLES TO SUIT M4 SCREWS

PART NUMBER	ENGINEERING NUMBER	FINISHED LENGTH	CABLE JACKET MATERIAL
1201148027	BKY8050-FBP-10	10M ± 75MM	PUR 3x0.75+16x0.34 BK
1201148060	BKY8050-FBP-05	5M ± 75MM	PUR 3x0.75+16x0.34 BK

DESCRIPTION
EC NO:IPG2017-0283 2016/09/14
DRWN:BBRAUCH
CHKD:ULETTENM
APPR:
2
REV
DESCRIPTION

QUALITY SYMBOLS
▼ = 0
▽C = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±---
1 PLACE	±0.3	±---
ANGULAR ±	--- °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: REISSNER DATE: 2010/03/22
CHECKED BY: NS DATE: 2010/03/22
APPROVED BY: NSTAUDIG DATE: 2010/03/23
MATERIAL NO.: SEE TABLE

MICRO-CHANGE MPIS
8 PORT TOP MOUNT
CABLE PUR

molex MOLEX INCORPORATED

DOCUMENT NO.: SD-120114-079
SHEET NO.: 1 OF 1

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION