


т	<u>م</u>	г	п	0

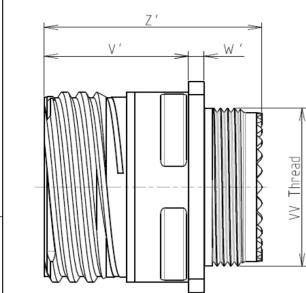

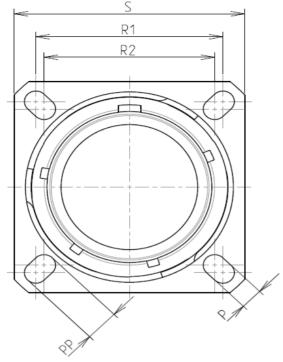



CHARAC

4

_

ω

 \sim

_

-Shell Material	: Composite
-Shell Plating	: Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8 μm minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65°C to +200°C

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
۷'	19.5+1.4/-0			
W'	2.1/3.65			
Ζ'	32 Max			
VV THREAD	M18x1-6g			

I G I	m	D	0	Φ	Þ		
	S R1 R2 V V V V V V V V V V V V V V V V V V			UT SHOWN AS EXAMPLE			4
			LATO				
CHARACTERISTICS	n as example						
-Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal						
-Shell Material: Composite-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy	P 3.25±0.2 PP 4.93±0.2 R1 23.01 R2 20.62 S 28.6±0.3 V' 19.5+1.4/-0		due to a use of the Specifications is	t be liable for any non-conformity f the Products which does not com ssued by either of the Parties or by nal recommendation, technical no	nply with y a third party		
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum	W' 2.1/3.65 Z' 32 Max				ction & Control List Not Listed		2
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories	VV THREAD M18x1-6g		PN	I: 8D013M26HD			
-Temperature Range : -65°C to +200°C -Salt Spray : 2000 hours		A 15	i-10-2016 First Release				
		ISS	DATE Latest modification	- by		MOD N°	
		Designed E	y: Date:	Composite Receptacle	e 8D series		-
BASIC SERIES: 8D 0 - 13 M 26 H D SHELL TYPE : Square Flange Receptacle - - 13 M 26 H D		SCALE		General linear Tolerances: ±	NPRDS / PROJECT 859		-
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	ATION : D Matings)	RIAU WWW.S	SOURIAU.COM	This document is the prope SOURIAU it must not be reproduce communicated without per	ed or		
PLATING : M = Nickel	CONTACT LAYOU			SOURIAU DRG N°		SHEET	-
		A3		8D013M26HD-C		1/2	
H G F	I E	D	C	B	I A		

		۵	г п	m	D	0
		Contact Layout				Panel Cutou
4		26			ħ.	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		2#12 6#22D	1		∑ –	
S	Ctc A B C D E F 1 2	X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 -4.34 3.25 0 -3.25 0				Dim ØA ØA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati
2						PN: 8D013N
					A 15-10-201 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					SCALE	General linear Tolerances:
<u>→</u>					SOURIAL	J WWW.SOURIAU.C
	H	G	F	E	FORMAT A3	SOURIAU 8D013M2
	11	·	1 I			v 1

