

Relay




Contact Ratings

10 Amps @ 30VDC/240VAC
 General Purpose
 1.5 Amps @ 120 VAC
 Inductive (CosØ=0.35)
 1HP @ 240VAC Motor
 1/2HP @ 120VAC, Motor

Specifications

Pick-Up Voltage: 75% of Rated Voltage
 Drop-Out Voltage:
 30% of rated AC Voltage
 10% of rated DC Voltage
 Max. Voltage: 110% of rated Voltage
 Operating Time: ≤20 milliseconds
 Coil Power:
 ≤1.6VA 50Hz
 ≤1.5VA 60Hz
 ≤1.0W DC
 Temperature Rating: -10°C to 40°C
 Contact Material:
 Silver Cadmium Oxide (AgCdO)
 Contact Resistance:
 <0.050Ohms (before use)
 Minimum Operating Current:
 5mA@24VDC
 Life: Mechanical:
 50,000,000 Operations
 Electrical: 1,300,000 Operations

Ordering Information

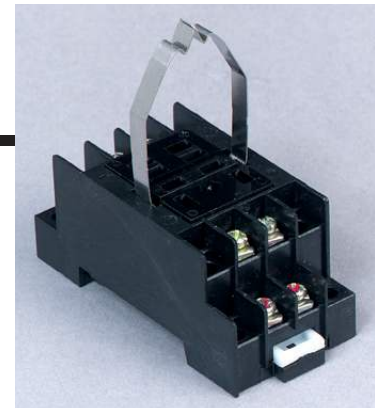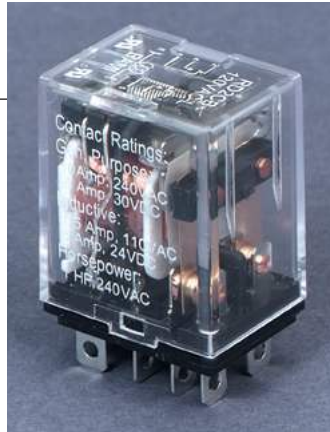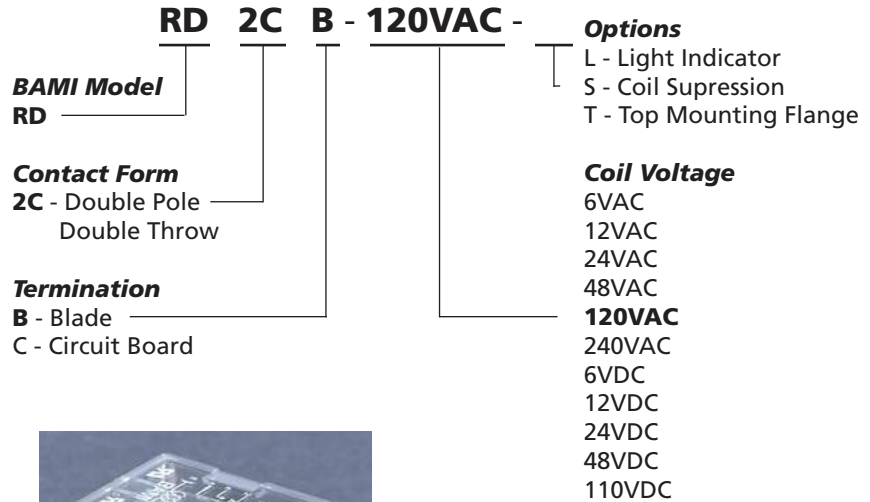


Socket


Specifications

Current Rating: 10 Amps
 Voltage Rating: 250VAC
 Mounting: DIN or Surface

Connections

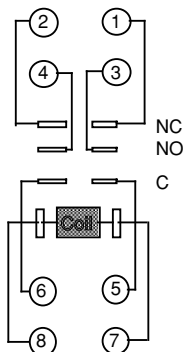

Dimensions

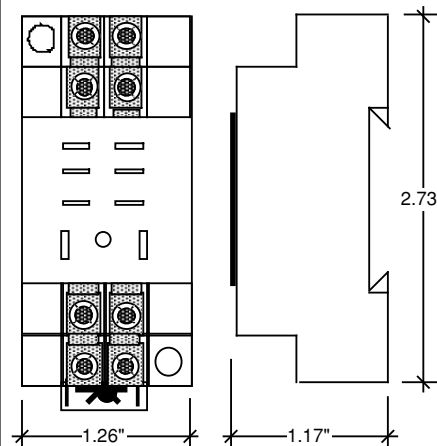

Ordering Information

