

REMARK:

1.CHARACTERISTICS:

RATED VOLTAGE: 250V
 RATED CURRENT: 5AMP
 CONTACT RESISTANCE: 25mohms MAX.INITIAL;40mohmsMAX.AFTER.
 INSULATION RESISTANCE: 5000Mohms MIN.at 500V DC
 DIELECTRIC STRENGTH: 1000Vrms
 OPERATING TEMPERATURE RANGE: -55°C~105°C
 INSERTION/EXTRACTION FORCE PER CONTACT :5N Max./0.3N Min.
 MATING/UNMATING CYCLES :50MATINGS MIN.

2.MATERIAL:




INSULATORS: GLASS-FILLED THERMOPLASTIC UL94V-0, COLOR IN BLACK.
 CONTACTS: COPPER ALLOY, SELECTIVE GOLD ON CONTACT AREA,
 100µ" Min MATTE TIN TOP OVER SOLDER AREA,
 30µ" Min NICKEL UNDER PLATE.
 SHELL: STEEL, 100µ" Min NICKEL TOP OVER,
 50µ" Min COPPER UNDER PLATE.
 BOARD LOCK :COPPER ALLOY,100µ" Min MATTE TIN PLATED.

3. PART NUMBER DESCRIPTION: **10090767-P XX X X LF**

SERIES NO. _____ LF: ROHS COMPLIANT
 TYPE _____ FLANGE MOUNTING OPTION
 P: PIN (MALE) X: UNC #4-40 CLINCHNUTS
 L: M3 CLINCHNUTS
 NUMBER OF CONTACTS _____ CONTACT FINISH
 09: 9-PIN 4: GOLD FLASH
 15: 15-PIN 6: 30µ" PLATING OPTION
 25: 25-PIN AVAILABLE ON REQUEST
 37: 37-PIN

POS.	PART NO.				THREAD TYPE
09P	10090767-P09*LLF				M3*0.5
15P	10090767-P15*LLF				M3*0.5
25P	10090767-P25*LLF				M3*0.5
37P	10090767-P37*LLF				M3*0.5
09P	10090767-P09*XLF				UNC 4-40
15P	10090767-P15*XLF				UNC 4-40
25P	10090767-P25*XLF				UNC 4-40
37P	10090767-P37*XLF				UNC 4-40
POS.	A	B	C	G	H
09P	30.81	24.99	16.92	2.74	5.90 ^{+0.15} ₀
15P	39.24	33.32	25.25	2.74	5.90 ^{+0.15} ₀
25P	53.04	47.04	38.96	2.77	5.70 ^{+0.25} ₀
37P	69.32	63.50	55.42	2.77	5.70 ^{+0.25} ₀

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltr	ecn no	dr	date	linear	.X ± 0.38	projection	www.fciconnect.com		
A	T09-1033	J.H	3/12/09		.XX ± 0.25		title		
B	T09-1044	J.H	4/2/09	angles	.XXX ± 0.10		D-SUB MALE RIGHT-ANGLE EU STYLE		
C	ELX-I-13433	AB	9/11/12		0' ±2'		product family		code
				dr	JASON HSU 3/12/09		D-SUB		TWN
				enr	JASON HSU 3/12/09	MM	size		dwg no
				chr	ALIAS BABU 9/11/12	scale	10090767		sheet
				appd	MITHUN PAUL 9/11/12	1:1	A4		1 of 2
sheet index	revision sheet	C	C						
		1	2						

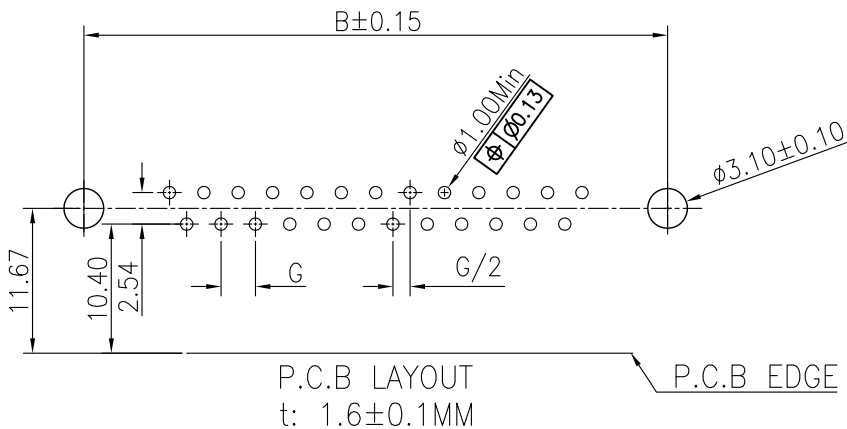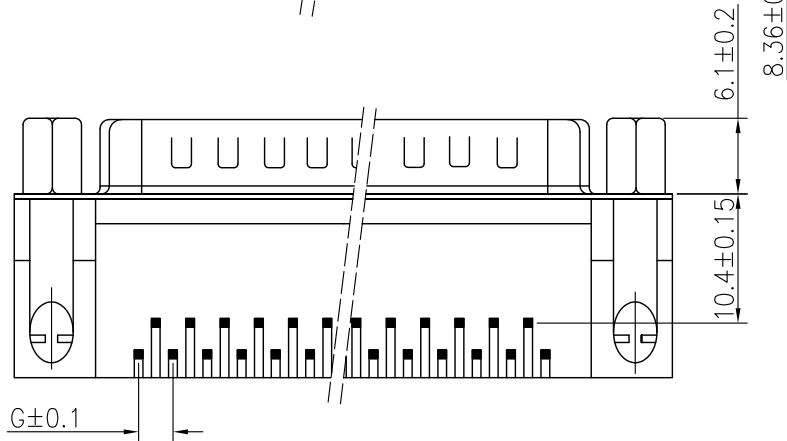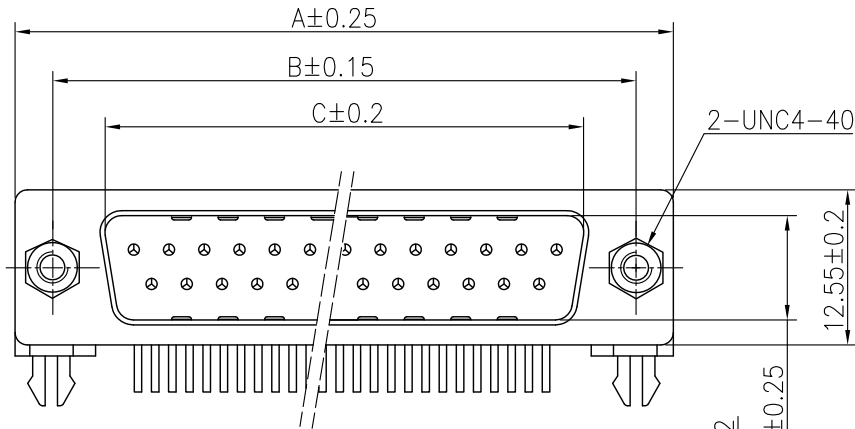

REMARK:

1.CHARACTERISTICS:


RATED VOLTAGE: 250V
 RATED CURRENT: 5AMP
 CONTACT RESISTANCE: 25mohms MAX.INITIAL;40mohms MAX.AFTER.
 INSULATION RESISTANCE: 5000Mohms MIN.at 500V DC
 DIELECTRIC STRENGTH: 1000VRMS
 OPERATING TEMPERATURE RANGE: -55°C ~ 105°C
 INSERTION/EXTRACTION FORCE PER CONTACT:5N Max./0.3N Min.
 MATING/UNMATING CYCLES:50MATINGS MIN.

2.MATERIAL:

INSULATORS: GLASS-FILLED THERMOPLASTIC UL94V-0, COLOR IN BLACK.
 CONTACTS: COPPER ALLOY,SELECTIVE GOLD ON CONTACT AREA,
 100µ" Min MATTE TIN TOP OVER SOLDER AREA,
 30µ" Min NICKEL UNDER PLATE.
 SHELL: STEEL,100µ" Min NICKEL TOP OVER,
 50µ" Min COPPER UNDER PLATE.
 BOARD LOCK: COPPER ALLOY,100µ" Min MATTE TIN PLATED.
 SCREW LOCK: COPPER ALLOY, 100µ" Min BRIGHT NICKEL PLATED.

3. PART NUMBER DESCRIPTION: **10090767-P XX X X LF**

SERIES NO. _____ LF: ROHS COMPLIANT
 TYPE _____ FLANGE MOUNTING OPTION
 P: PIN (MALE) V: UNC #4-40 SCREWLOCKS
 NUMBER OF CONTACTS _____ CONTACT FINISH
 09: 9-PIN 4: FLASH GOLD
 15: 15-PIN 6: 30µ" PLATING OPTION AVAILABLE
 25: 25-PIN ON REQUEST
 37: 37-PIN

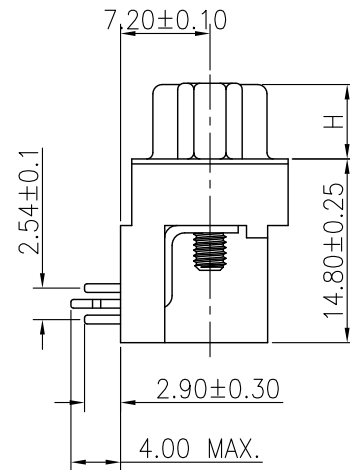

POS.	PART NO.			
09P	10090767-P09*VLF			
15P	10090767-P15*VLF			
25P	10090767-P25*VLF			
37P	10090767-P37*VLF			

POS.	A	B	C	G	H
09P	30.81	24.99	16.92	2.74	5.90 ^{+0.15} ₀
15P	39.24	33.32	25.25	2.74	5.90 ^{+0.15} ₀
25P	53.04	47.04	38.96	2.77	5.70 ^{+0.25} ₀
37P	69.32	63.50	55.42	2.77	5.70 ^{+0.25} ₀

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltr	ecn no	dr	date	linear	.X ± 0.38	projection	www.fciconnect.com		
C					.XX ± 0.25		title		
				angles	.XXX ± 0.10		D-SUB MALE RIGHT-ANGLE EU STYLE		
					0° ± 2°		product family		code
				dr	JASON HSU 3/12/09		D-SUB		TWN
				enrg	JASON HSU 3/12/09	MM	size		sheet
				chr	ALIAS BABU 9/11/12	scale	10090767		2 of 2
				appd	MITHUN PAUL 9/11/12	1:1	A4		
sheet index	revision sheet								