
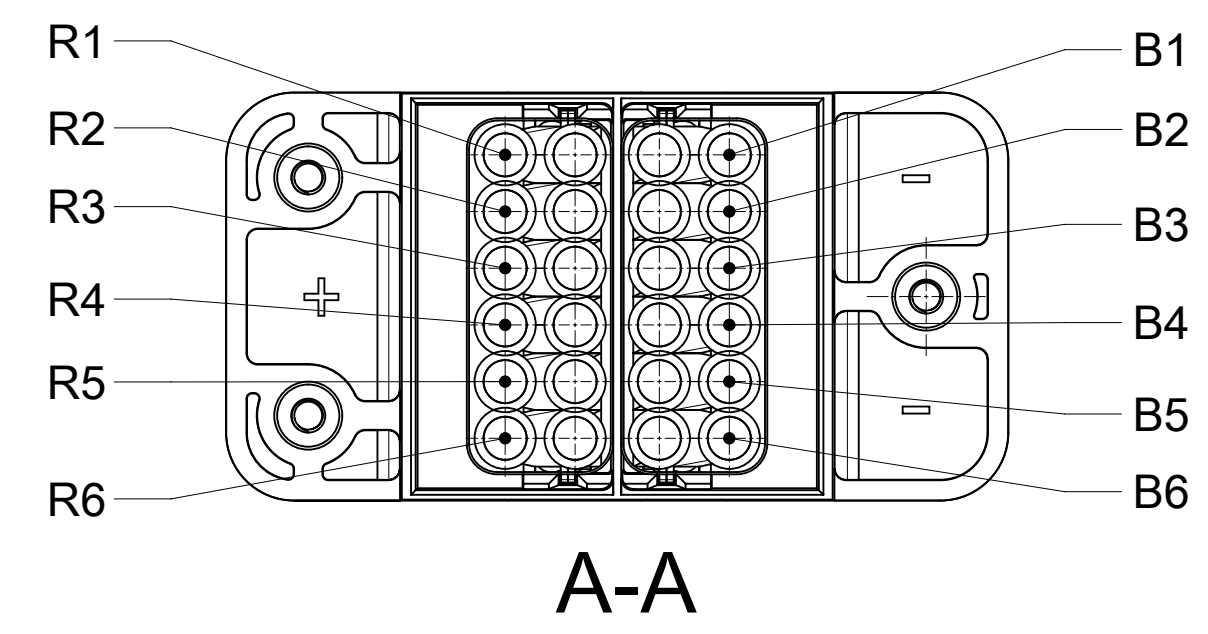



REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	2022.08.31	A	INITIAL RELEASE	LUCY LI

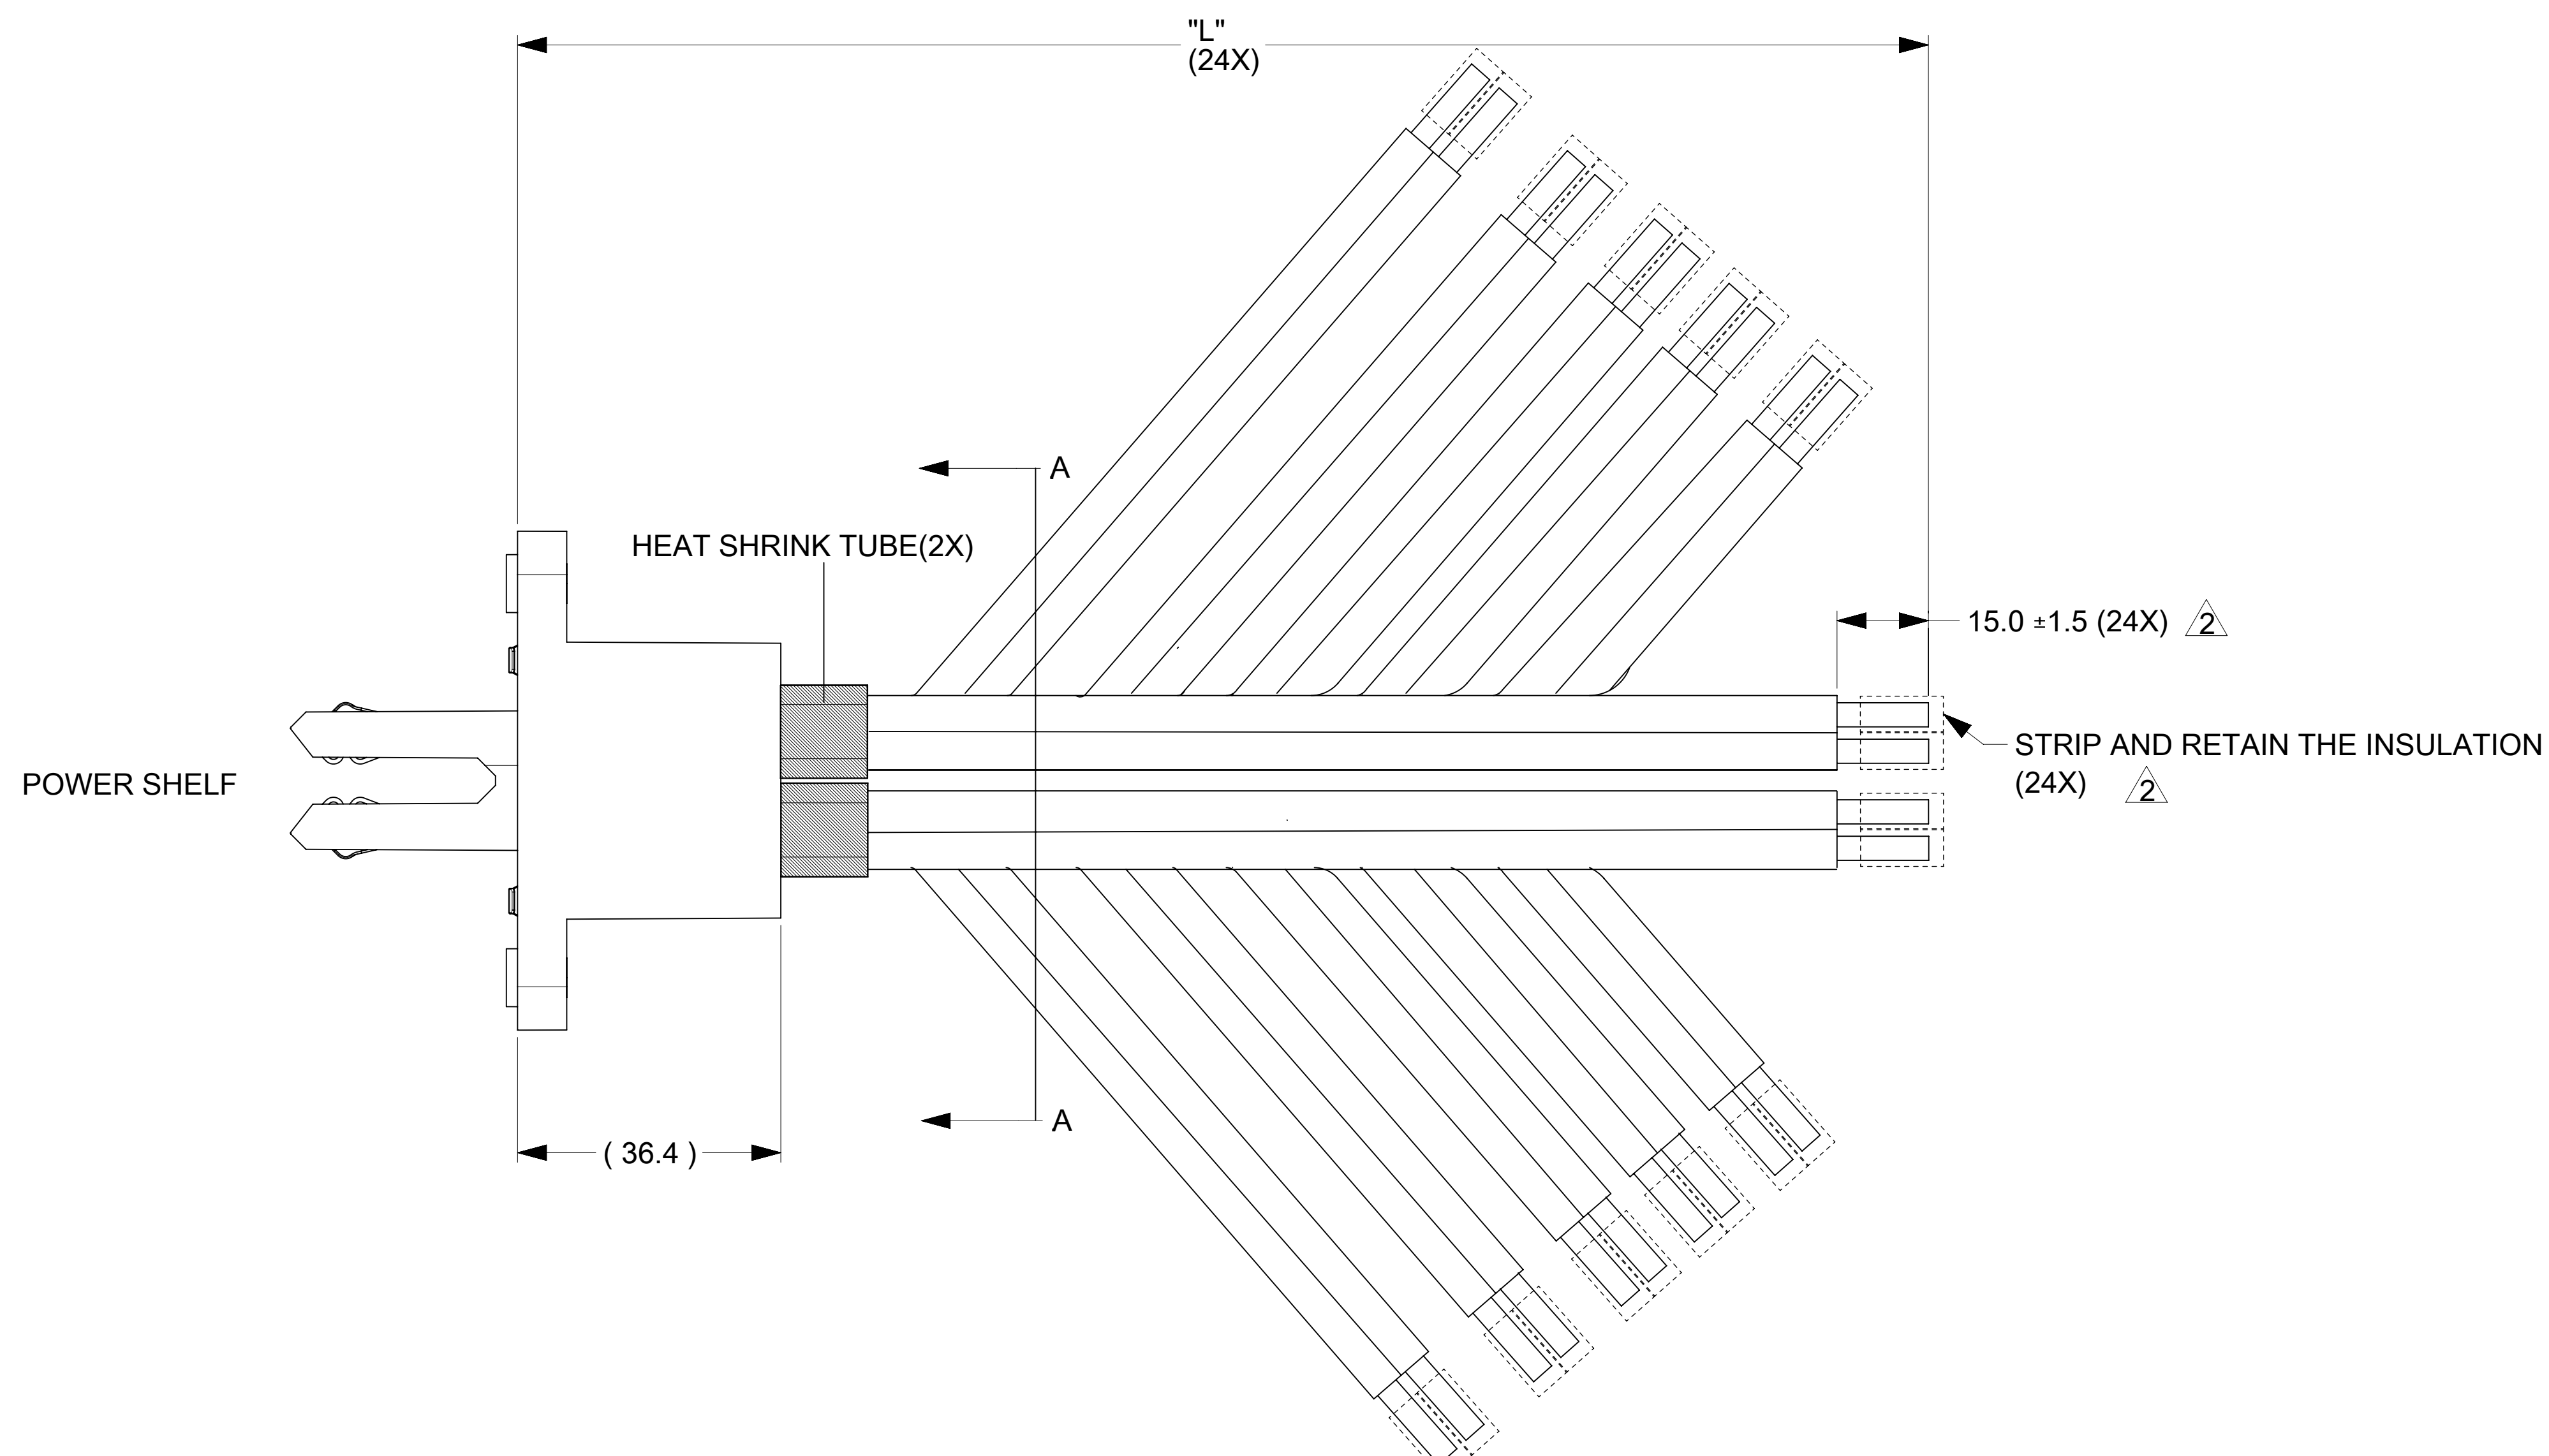




NO.	WIRE LENGTH "L"+10/-0mm	WIRE STYLE	NOTE	NO.	WIRE LENGTH "L"+10/-0mm	WIRE STYLE	NOTE
R1	450	UL 3132	8 AWG_RED(2x)	B1	450	UL 3132	8 AWG_BLACK(2x)
R2	450	UL 3132	8 AWG_RED(2x)	B2	450	UL 3132	8 AWG_BLACK(2x)
R3	450	UL 3132	8 AWG_RED(2x)	B3	450	UL 3132	8 AWG_BLACK(2x)
R4	450	UL 3132	8 AWG_RED(2x)	B4	450	UL 3132	8 AWG_BLACK(2x)
R5	450	UL 3132	8 AWG_RED(2x)	B5	450	UL 3132	8 AWG_BLACK(2x)
R6	450	UL 3132	8 AWG_RED(2x)	B6	450	UL 3132	8 AWG_BLACK(2x)

- NOTES:
- MATERIALS:
 - HOUSING BODY: POLYMER. UL94V-0; COLOR: BLACK.
 - TERMINALS: COPPER ALLOY.
 - CHASSIS CONTACT: COPPER ALLOY.
 - PLATING:
 - CONTACT AREAS: SILVER OVER NICKEL.
 - TAB AREAS: TIN OVER NICKEL OVERALL.
 - LUBRICATION: LUBED IN CONTACT AREA.
 - REFERENCE DOCUMENT: 2158470000-PS, 2158600000-AS
 - THIS PRODUCT MUST MEET EU RoHS REQUIREMENT
 - MATED WITH 6.00 +/-0.2MM THICKNESS SILVER PLATED BUSBAR
 - MOUNTING HARDWARE
 - 3 PCS M3 SCREWS.
 - 3 PCS 20mm M3 FENDER WASHERS, THICKNESS OF FENDER WASHERS IS 1.0+0.3/-0mm
 - 3 PCS M3 LOCK WASHERS.


- TORQUE RANGE FOR APPLICATION MOUNTING HARDWARE SHALL BE 0.7 TO 0.9N-m FOR REFERENCE

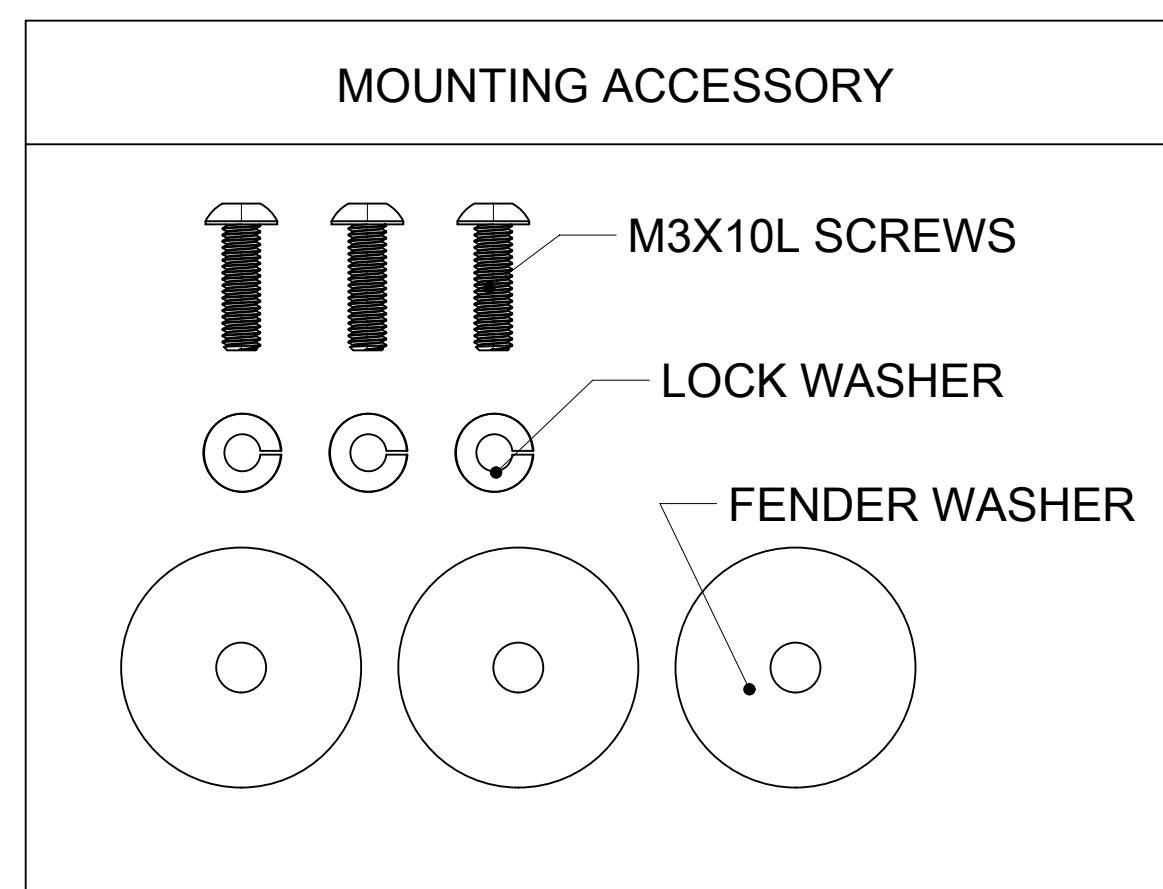

FUNCTIONAL SYMBOLS FA = 0 FC = 0 FD = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	EC NO: 719733		
	mm	3:1	DRWN: LLI205 2022/08/31		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: LLI205 2022/08/31		
ANGULAR TOL ± °		APPR: YXZOU 2022/09/01		PRODUCT CUSTOMER DRAWING	
4 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	
3 PLACES ±		DRWN: LLI205 2022/07/11		2158600011	
2 PLACES ± 0.15		APPR: YXZOU 2022/09/01		DOC TYPE	
1 PLACE ± 0.25		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PSD	
0 PLACES ±		THIRD ANGLE PROJECTION		DOC PART	
		DRAWING		000	
		SERIES		REVISION	
		D-SIZE		A	
		MATERIAL NUMBER		SHEET NUMBER	
		215860		1 OF 2	
		CUSTOMER			
		2158600011			

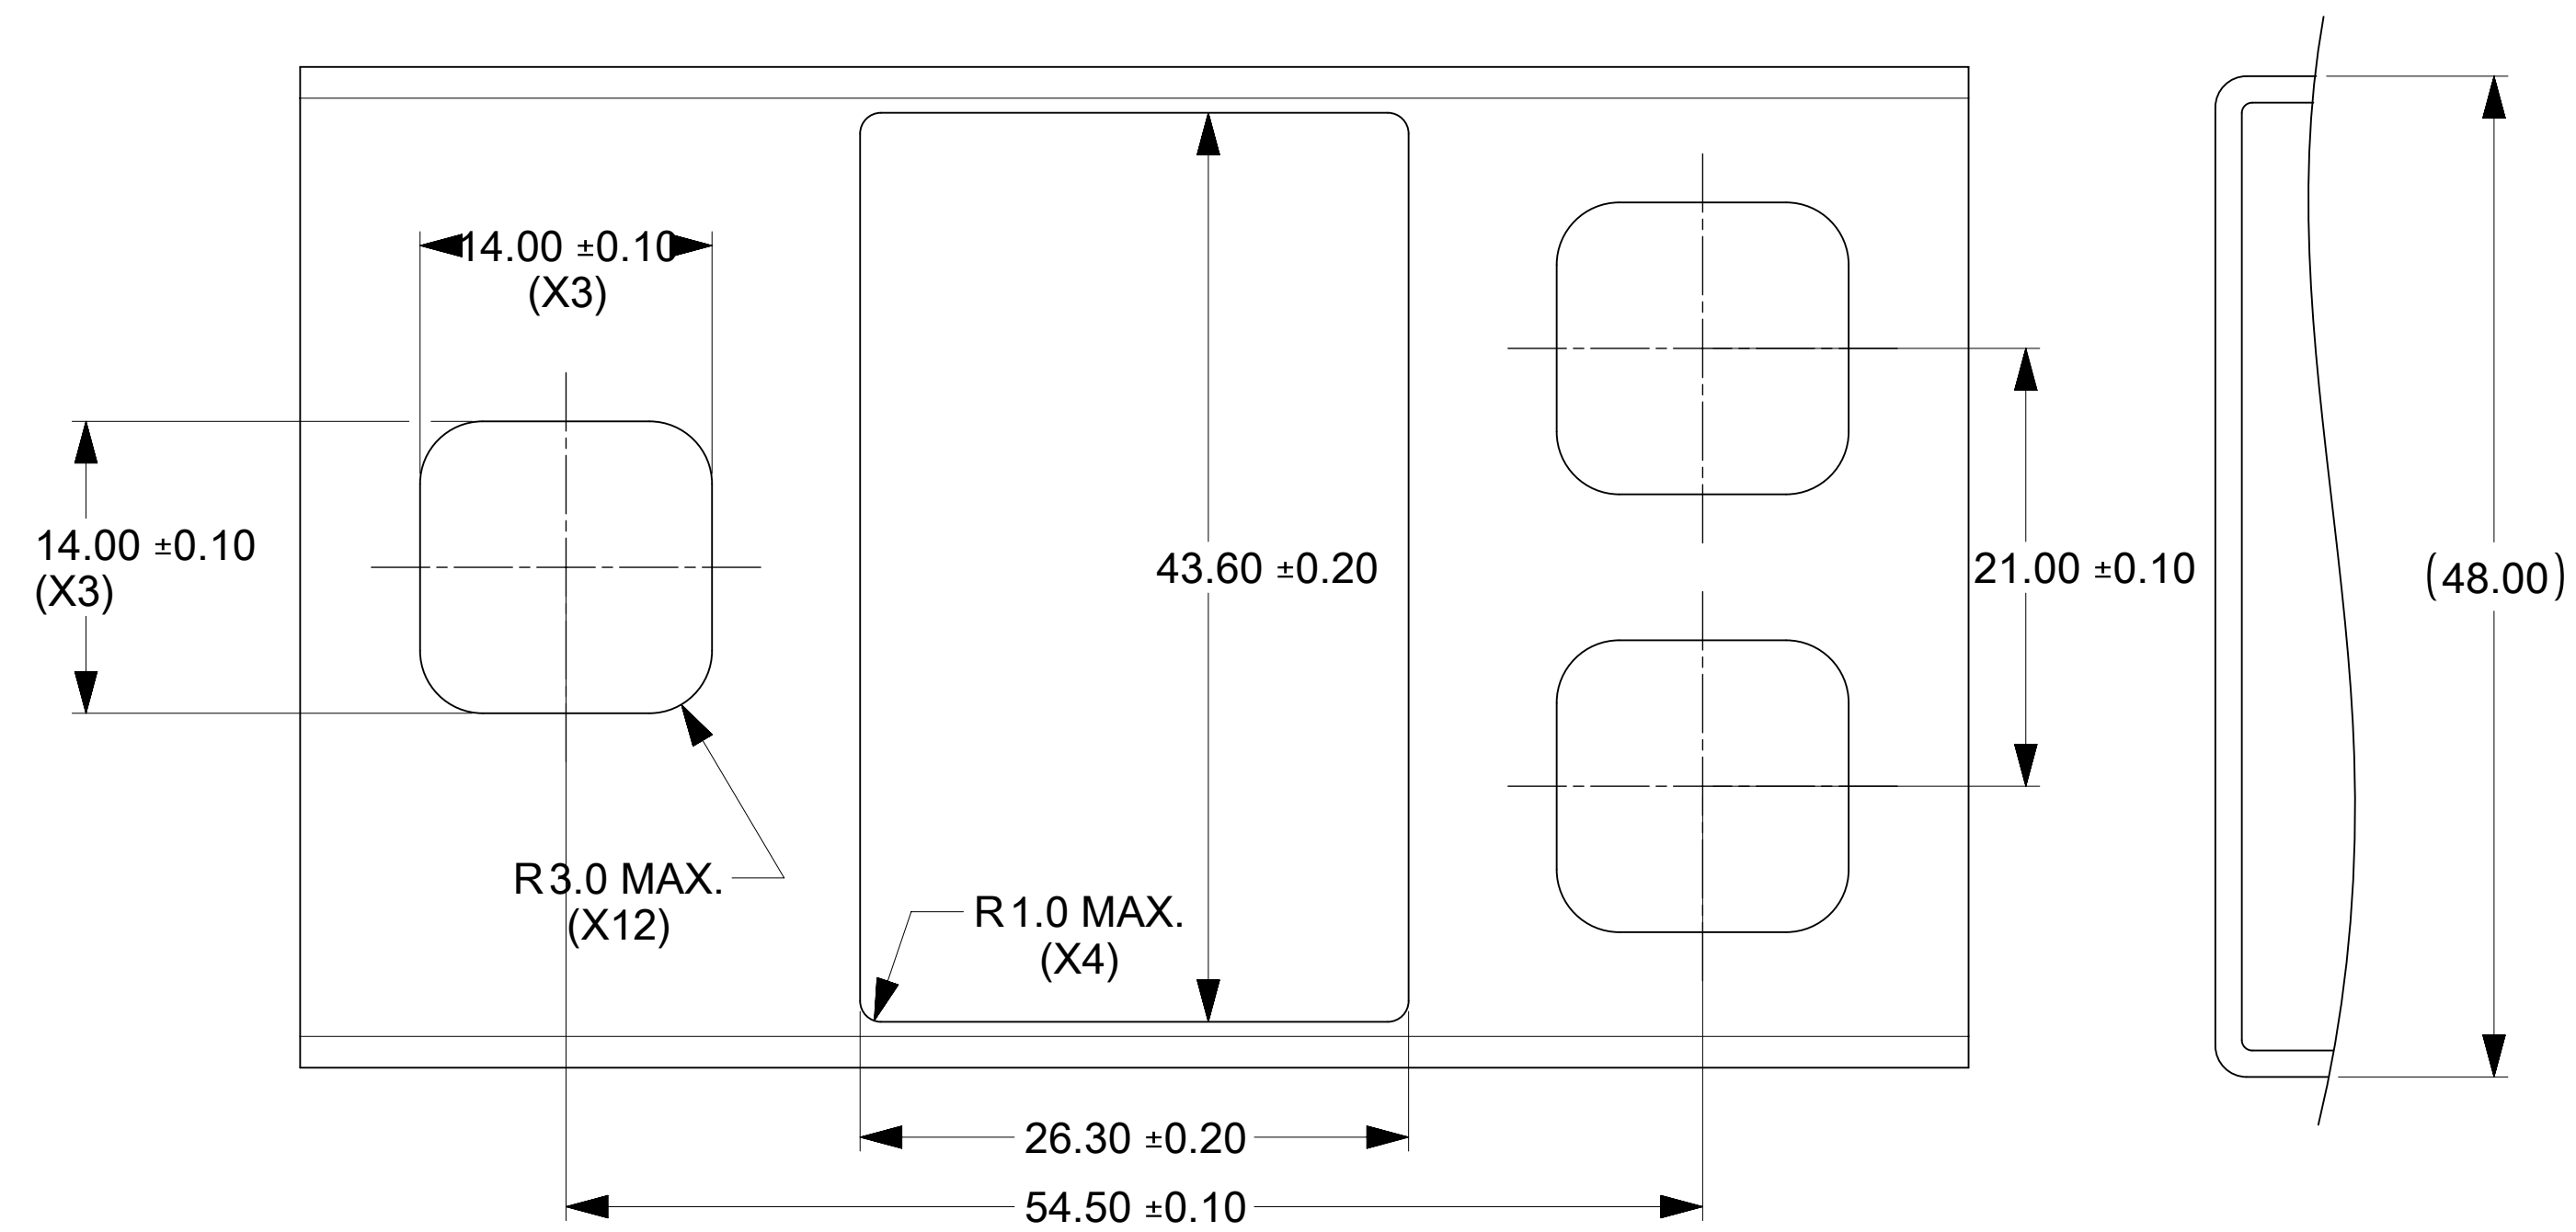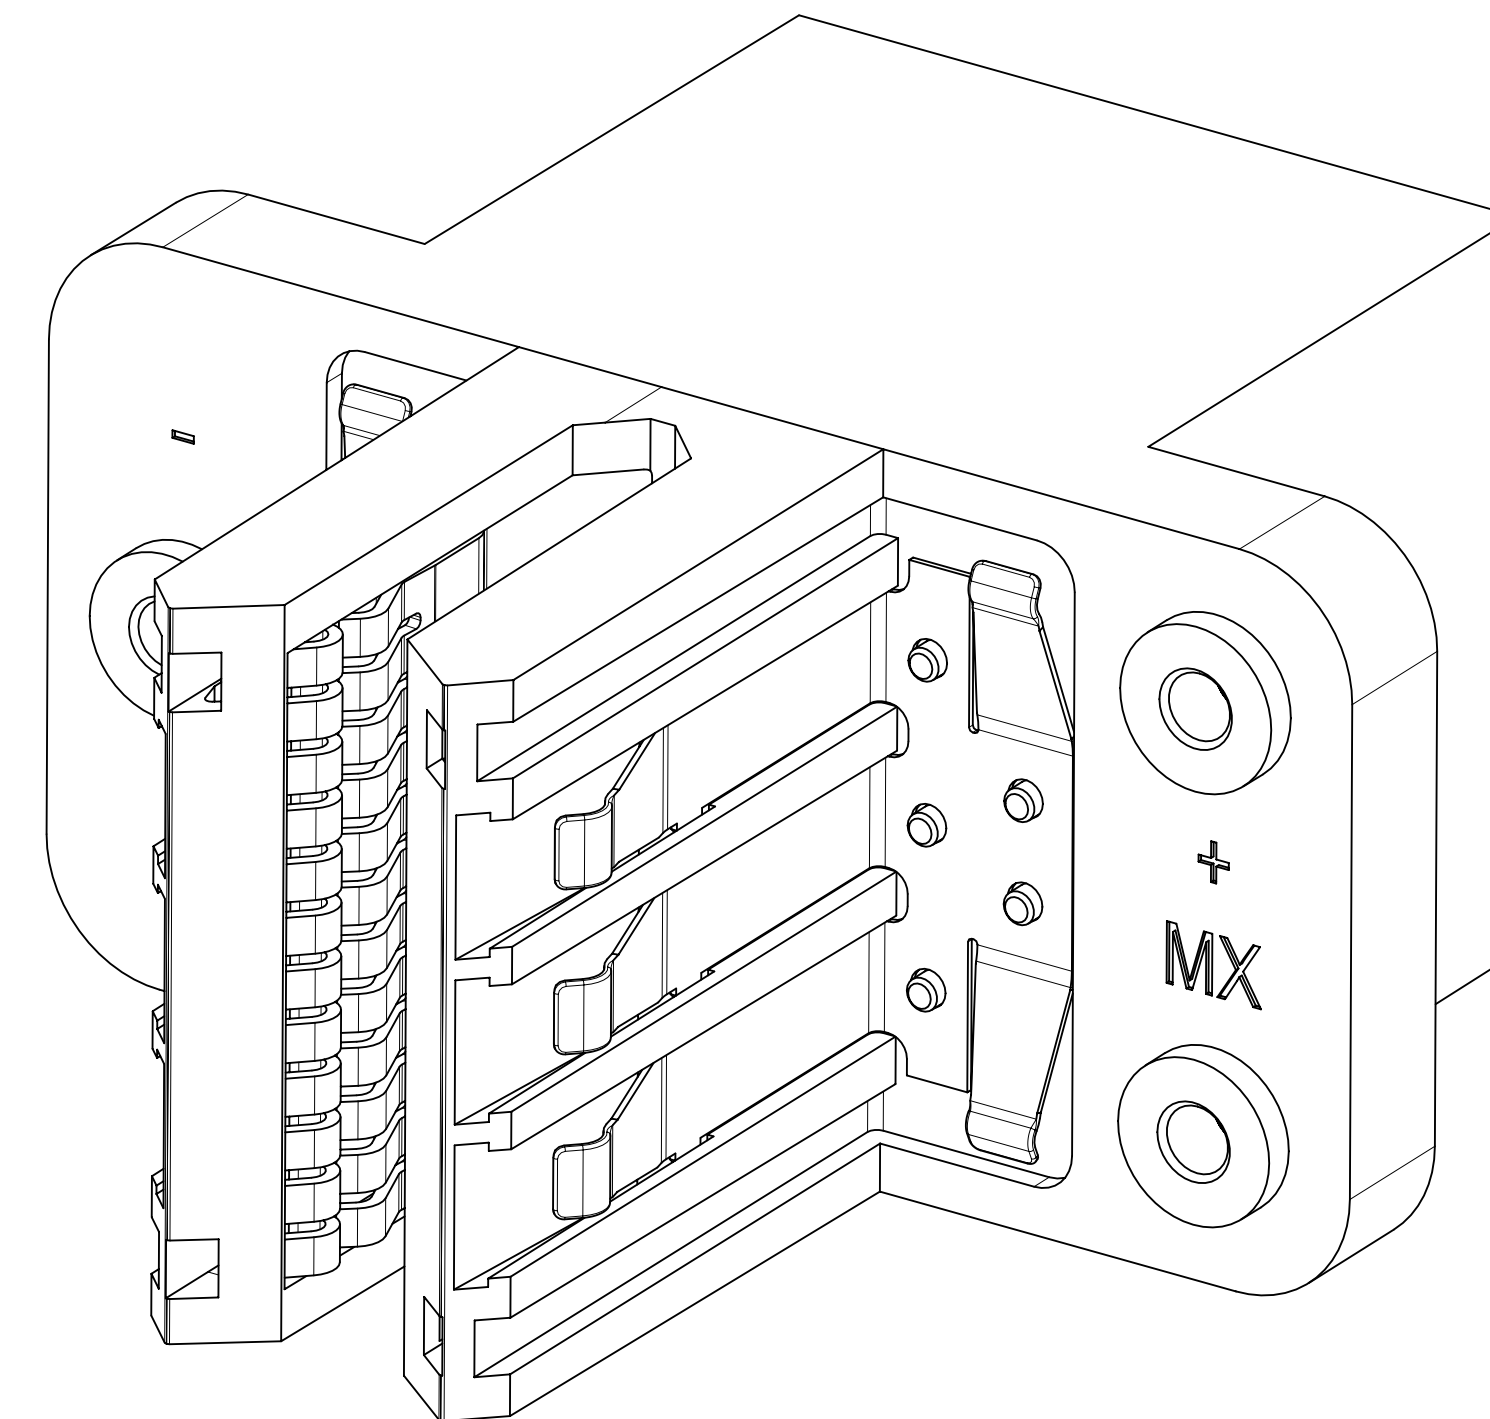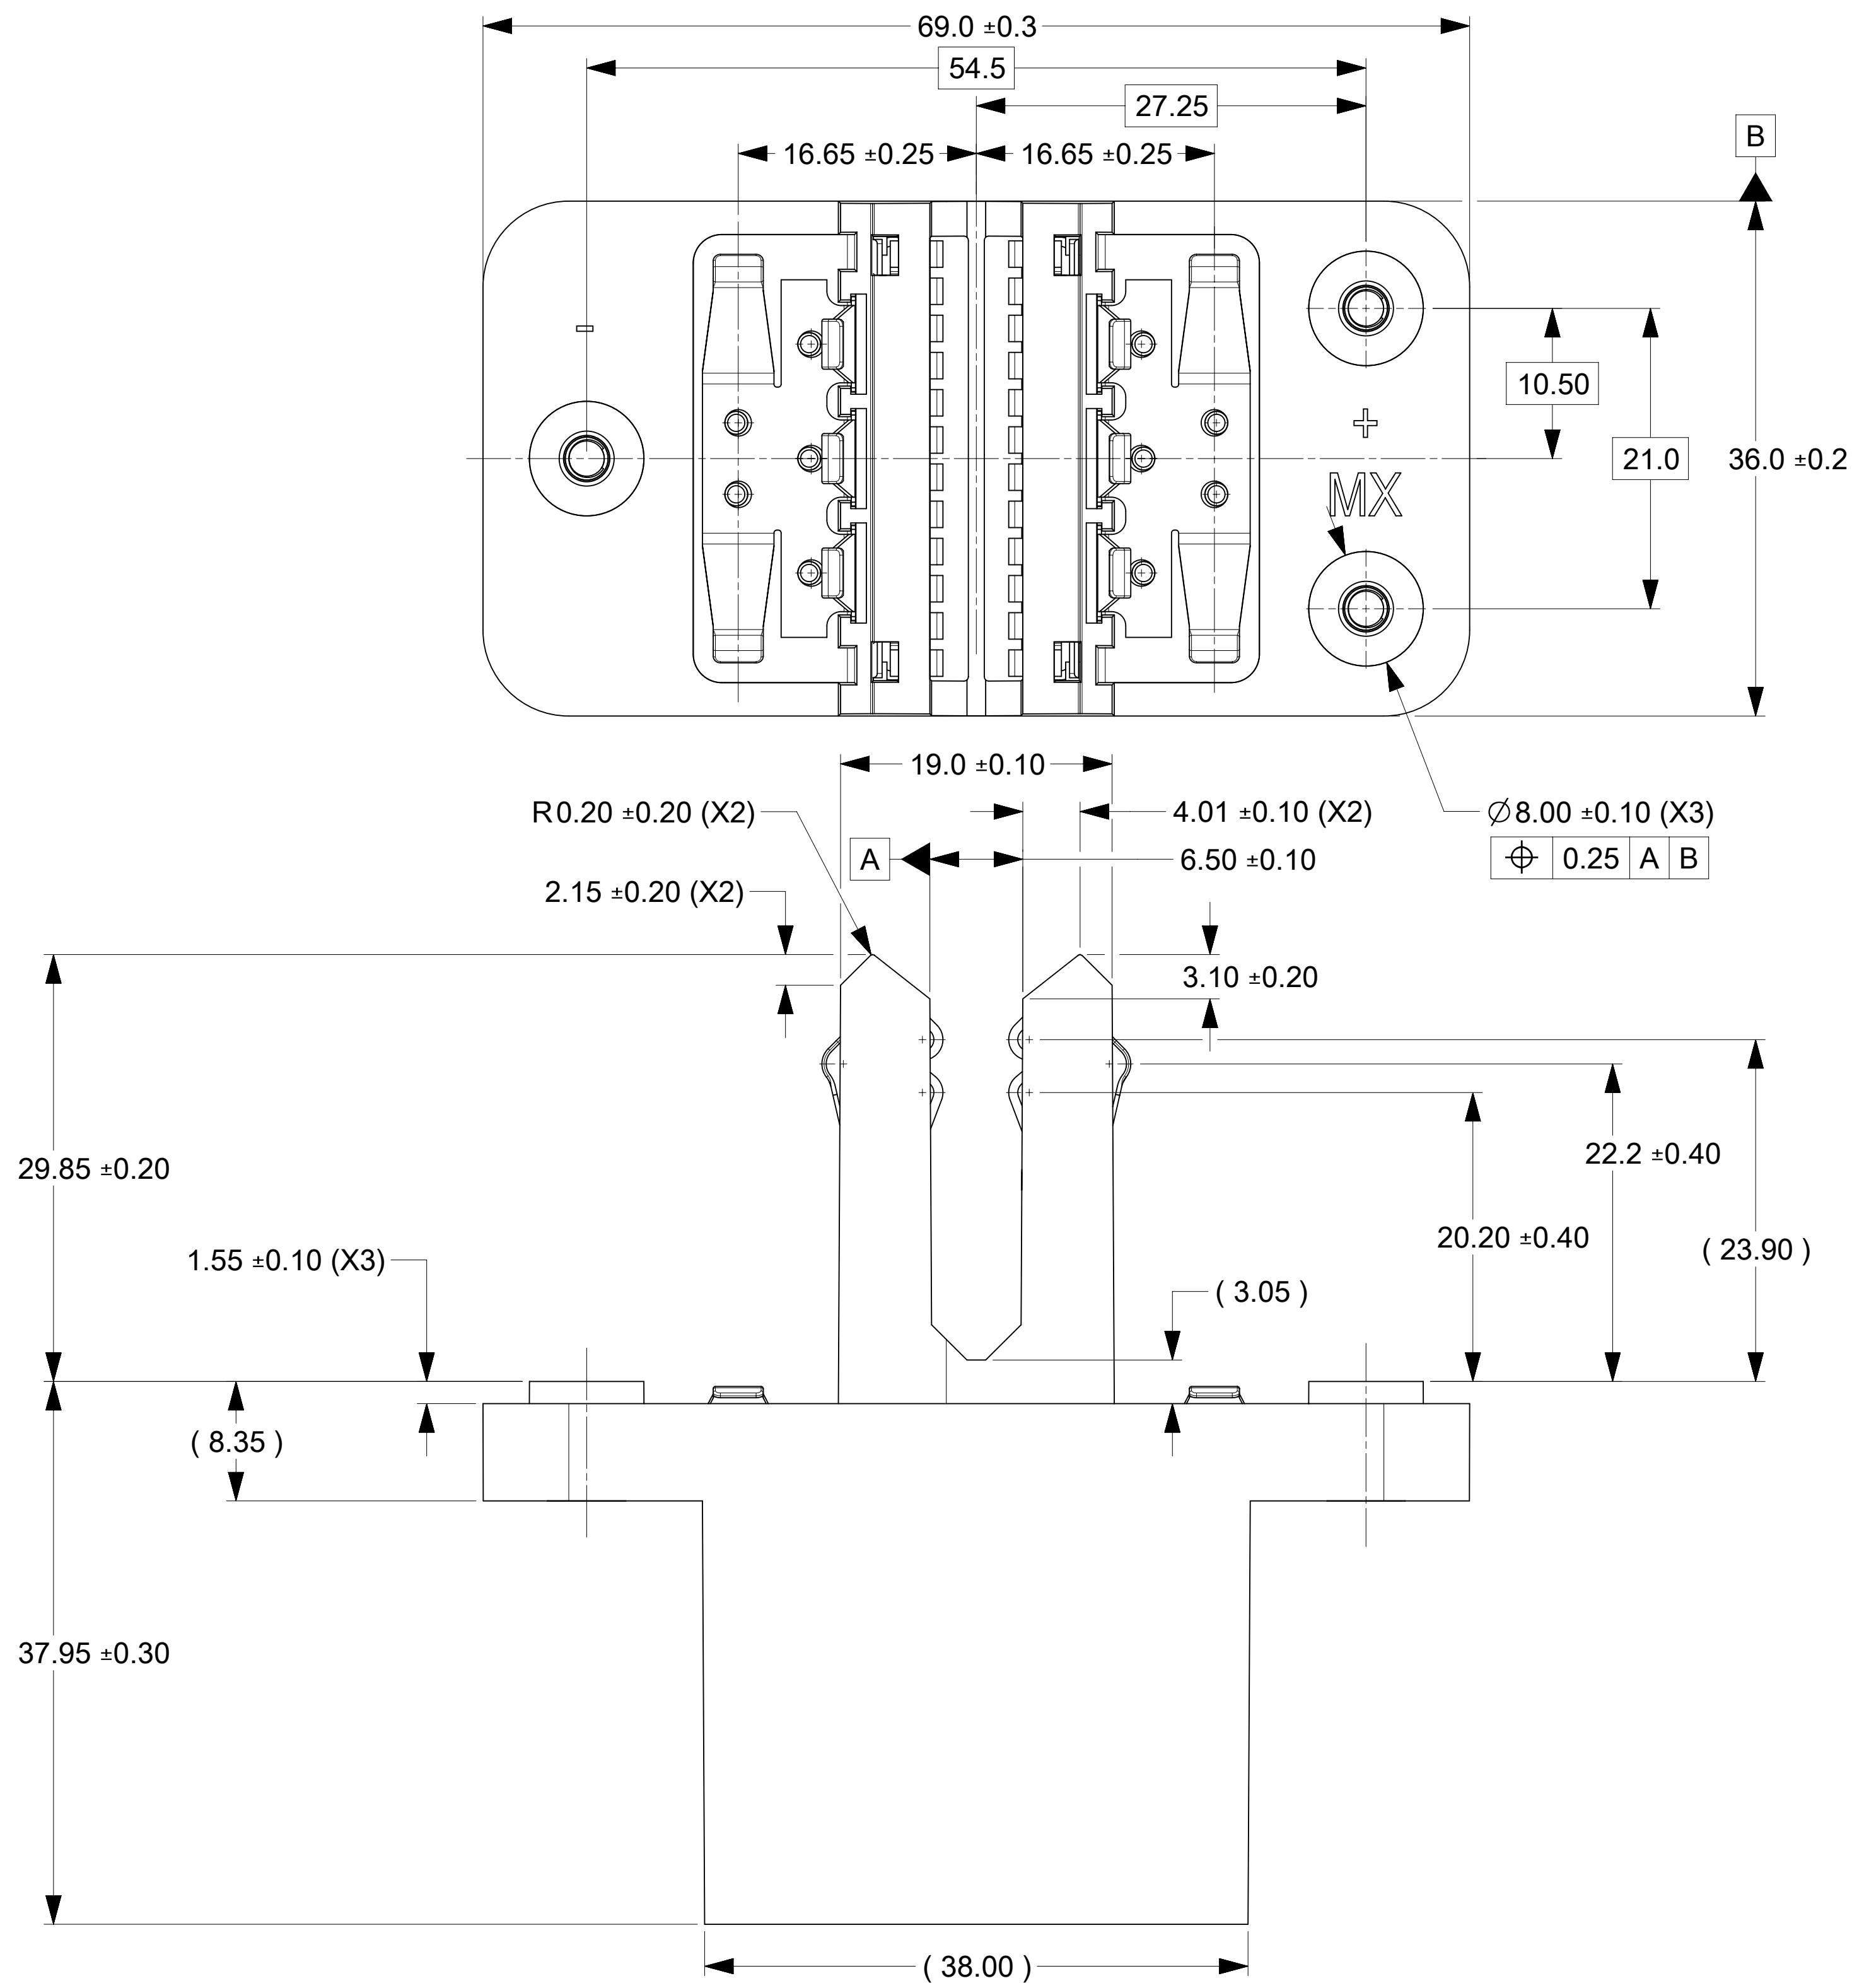

RECOMMENDED PANEL LAYOUT(1.32mm THICK MAX.)

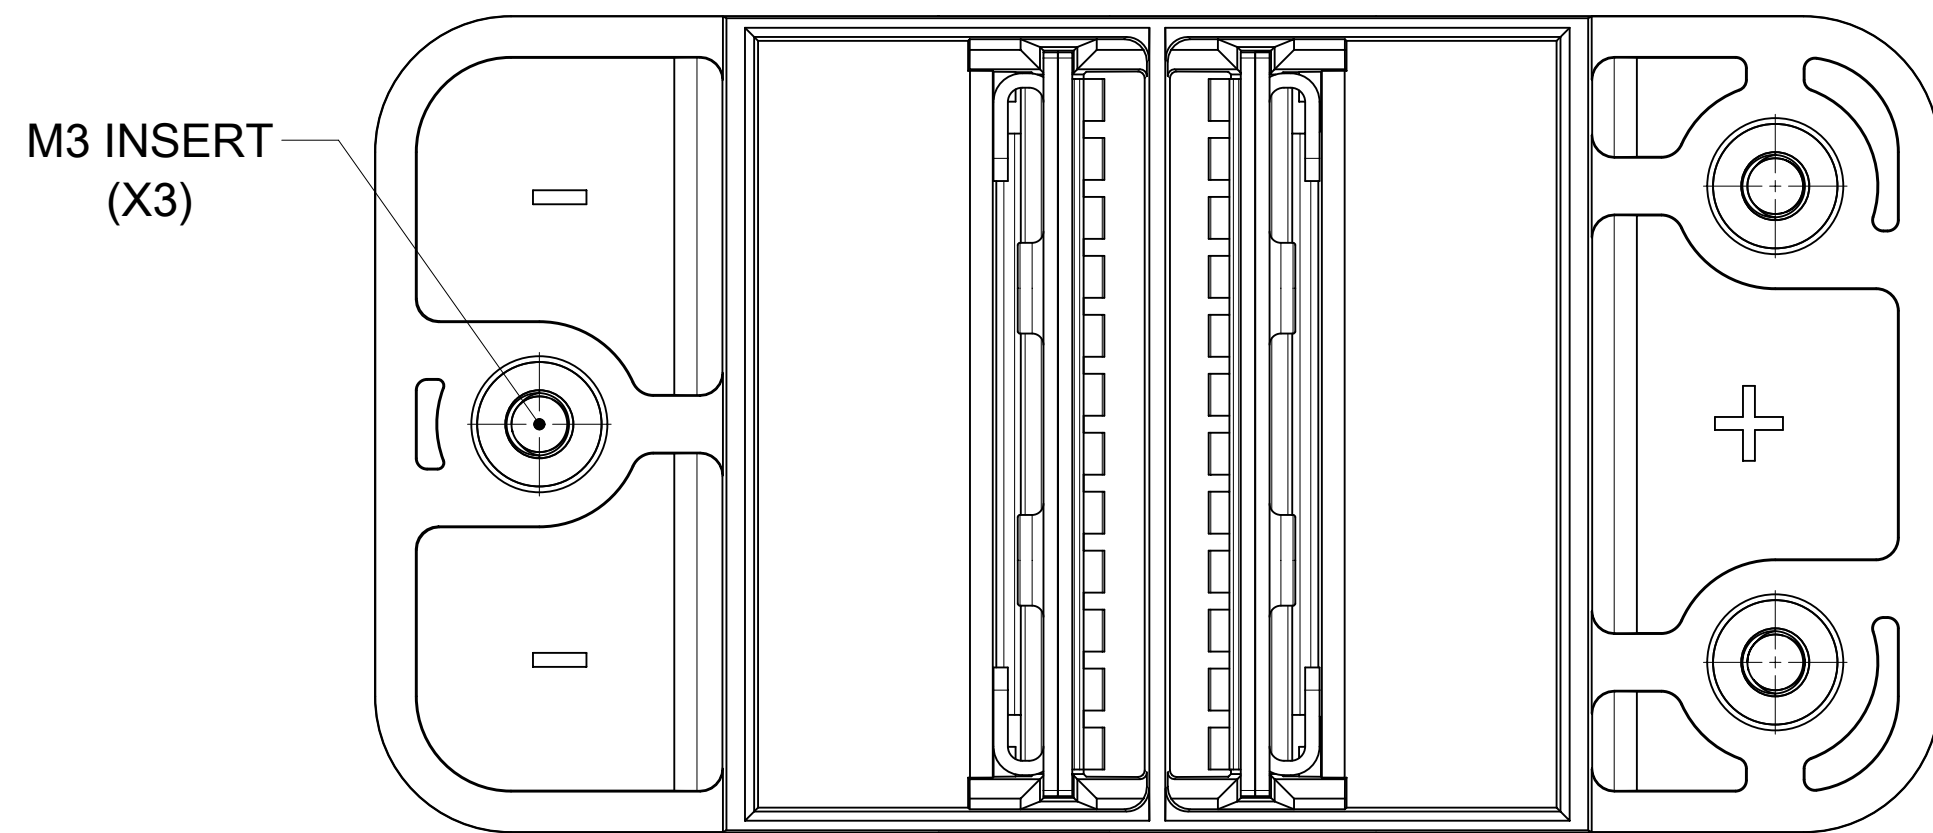

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	DIMENSION UNITS	SCALE	CURRENT REV DESC:
$\nabla_A = 0$	mm	3:1	
$\nabla_C = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		
$\nabla_D = 0$	ANGULAR TOL	\pm	$^\circ$
DIVISIONAL SYMBOLS	4 PLACES	\pm	
	3 PLACES	\pm	
	2 PLACES	± 0.15	
	1 PLACE	± 0.25	
	0 PLACES	\pm	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING
		SERIES	MATERIAL NUMBER
		D-SIZE	215860
		CUSTOMER	2158600011
		SHEET NUMBER	2 OF 2

molex

POWER SHELF 450MM TEST PIGTAIL

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER DOC TYPE DOC PART REVISION

2158600011 PSD 000 A

EC NO: 719733 DRWN: LLI205 2022/08/31

INITIAL REVISION: DRWN: LLI205 2022/07/11

APPR: YXZOU 2022/09/01