

Ratings

Voltage: 300
 Temperature: 105 °C
 Flammability: VW-1



Conductor

Conductor count: 2
 Gauge: 22 AWG, 0.34 mm²
 Material: bare copper strands
 Strand size: Ø 0.16 mm x 17
 Maximum resistance at 20 °C: 55.4 ohms/km

Insulator

Material: XLPE, LSZH
 Color: black
 Diameter: 3.20 ± 0.3 mm (1.6x3.2)
 Nominal thickness: 0.4 mm

Wire marking: E339579 UL AWM STYLE 4384 22 AWG 105°C
 300V VW-1 TENSILITY

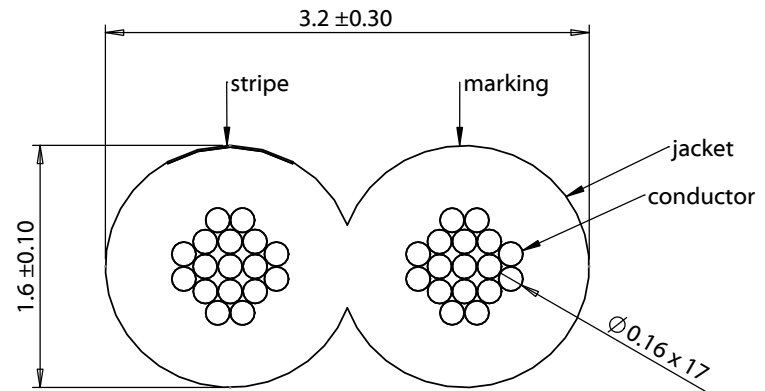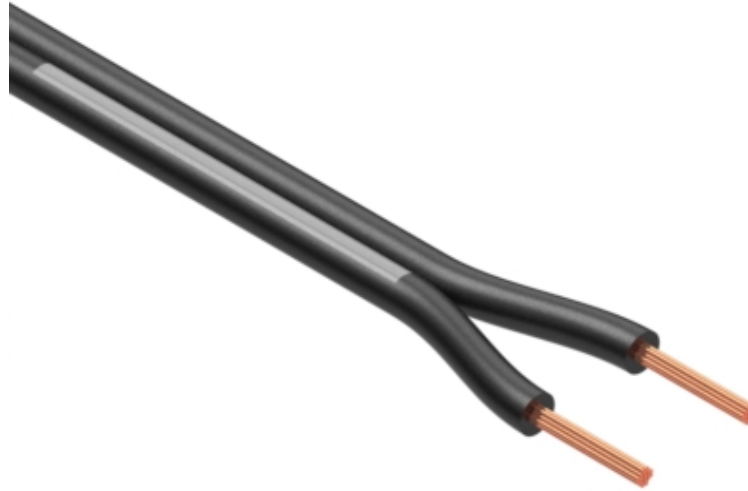

Revision:	Date:	Description:
A	10/19/2018	Initial release

Prepared:	 <small>Digitally signed by GL Date: 2018.10.19 15:11:34 -07'00'</small>
GL	
Verified:	 <small>Digitally signed by JP Date: 2018.10.19 16:35:03 -07'00'</small>
JP	
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	

Notes:
RoHS and REACH compliant
Function test: no open, no short circuit, no intermittent
Description:
Wire, 2C, 22 AWG, UL4384, 300V, 105C, 3.2 mm, VW-1, LSZH, XLPE

TENSILITY

tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com

Size:	Part number:
A	30-01253
Scale: 20:1	 Sheet 1 of 1