


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE INCH [mm]	HOUSING COLOR (TRANSLUCENT)	MAX WIRE INSULATION DIA.	DIMENSIONS in. [mm]			CRIMP TOOLS
					L± .03 [0,8]	W± .01 [0,3]	H± .01 [0,3]	
EDNF18250F1MB	#22-18 [0,5-1,0]	.250 X .032 [6,3 X 0,8]	RED	.136 [3,45]	.91 [23,1]	.45 [11,4]	.34 [8,6]	CT-520 CT-600-A CT-1525 CT-2500
EDNF14250F1MB	#16-14 [1,5-2,5]	.250 X .032 [6,3 X 0,8]	BLUE	.160 [4,06]	.91 [23,1]	.45 [11,4]	.34 [8,6]	
EDNF10250F1MB	#12-10 [4,0-6,0]	.250 X .032 [6,3 X 0,8]	YELLOW	.220 [5,59]	.96 [24,4]	.45 [11,4]	.36 [9,1]	CT-600-A CT-1550 CT-1551 CT-2500

NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
 - A. STRANDED COPPER WIRE ONLY
 - B. 221°F (105°C) MAX TEMP RATING (CSA)
 - C. 257°F (125°C) MAX TEMP RATING (UL)
 - D. 600V MAX VOLTAGE
- MATERIAL:
 - A. STAMPING: .016" (0.41) THK BRASS, NICKEL PLATED
 - EDNF10250F1MB: .032" (0,81) THK COPPER, NICKEL PLATED
 - B. HOUSING: 6/6 NYLON
- WIRE STRIP LENGTH: 9/32" ^{+1/32} ₋₀ [7,1mm ^{+0,8} ₋₀]
 FOR EDNF10250F1MB: 3/8" ^{+1/32} ₋₀ [9,5mm ^{+0,8} ₋₀]
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

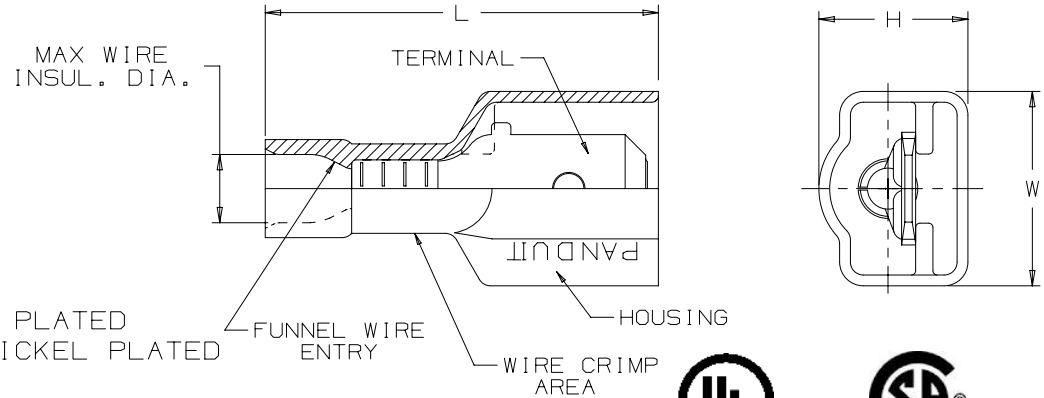

LISTED
20H3
E78522



CERTIFIED
LR31212

TITLE STRONGHOLD MALE DISCONNECT (250 SERIES) NYLON FULLY INSULATED #22-10 AWG CUSTOMER DRAWING				
ITEM REVISION NAME			00123SHY/00	
DATASET FILE NAME			00123SHY/00	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °				
DRAWING NUMBER:			SH41402	
DRAWN BY	DATE	CHK	SCALE	SIZE
JHNU	2/18	TMR	NTS	A
SHT 1 OF 1				

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

D10100DA/20