

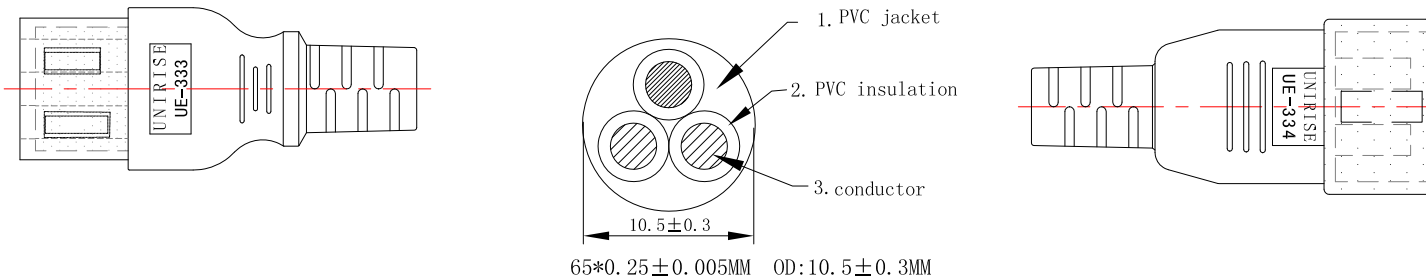


Items	Content Revised	Date
1		

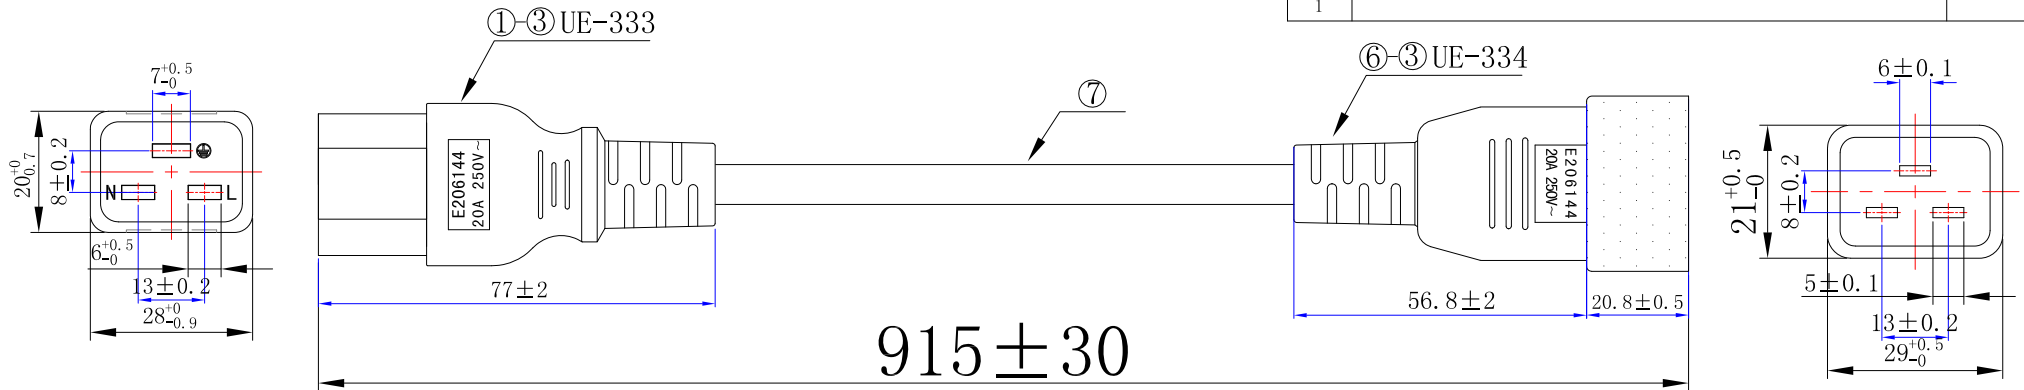

**Technical requirements:**

1. Plug: a: UE-333, Current (A) : 20, Voltage (V) : 250  
b: UE-334, Current (A) : 20, Voltage (V) : 250
2. Cord: Soft SJT #12/3C 105°C
3. High Voltage Tested: 1500V/S No Attacked, No Flicker
4. No nick, Spot, Mottle Nn Appearance and Wording is Clearly
5. The All Material Compliance with RoHS and REACH

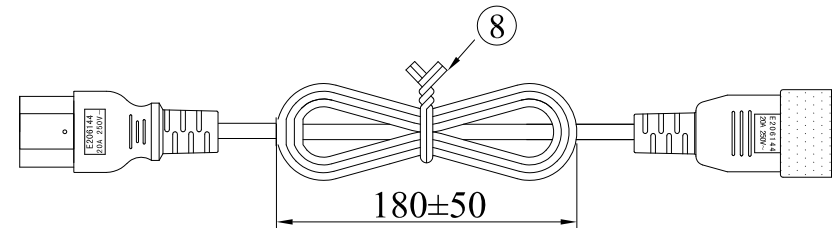

CORD MARKING: E176096 (UL) SJT VW-1 105°C 300V 3x3.31mm<sup>2</sup> (12AWG)  
Or C(UL) SJT FT1 105°C 300V 3x3.31mm<sup>2</sup> (12AWG) UNIRISE

**BOM表**

8	LK0713	PE two side strip13CM	1PCS
7	-----	SJT 12/3C 105°C Soft	1PCS
6	-----	UE-334 Inner frame	1PCS
5	-----	Earth Blade of UE-334	1PCS
4	-----	L and N Blade of UE-334	2PCS
3	BK116000	PVC of plug 77A	/
2	-----	UE-333 Inner frame	1PCS
1	-----	Blade of UE-333	3PCS
Items	Part Number	Description	Q' TY

CUSTOMER CONFIRM	Colors available: Black, Blue, Red, Green, Yellow, Orange, White	
<b>Drawing No.</b>		Page:    Version: A
Power Supply Cord: UE-333+UE-334		<b>Approved by:</b>
<b>Customer:</b>		<b>Checked by:</b>
		<b>Drawn by:</b>
	Unit: mm	Sheet: $\frac{1}{1}$
		DATE: 2013-01-23