


DESCRIPTION: 9 POS MICRO-D FEMALE (ASSEMBLED) TO BLUNT CUT

**THUMBSCREWS: NICKEL PLATED STEEL - UNC #2-56 THREAD**

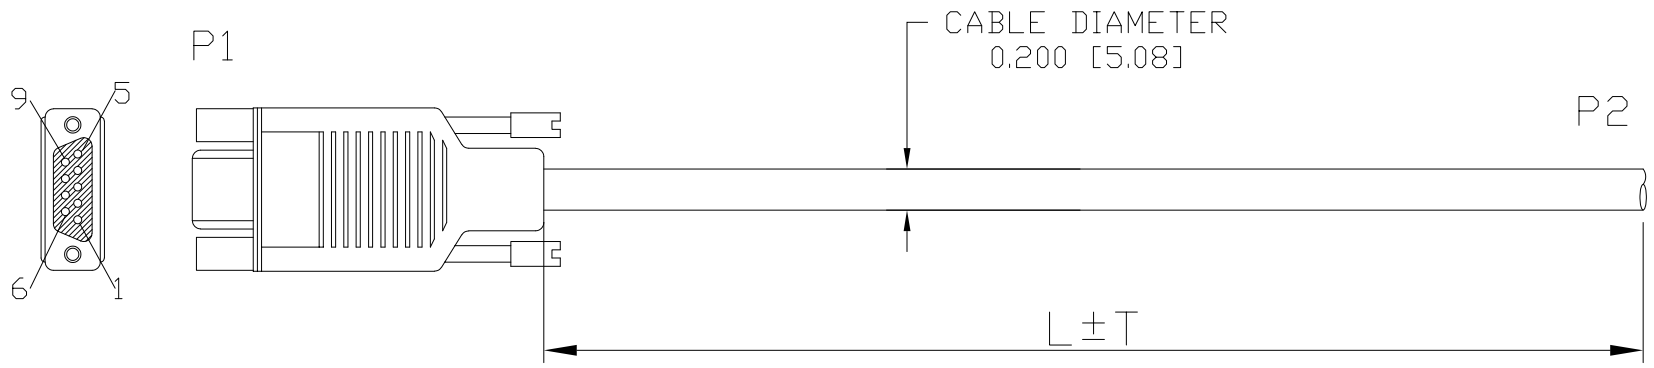

1. P1. CONNECTOR: NORCOMP MICRO D 9S, ASSEMBLED HOOD W/THUMBSCREWS
2. P2. BLUNT CUT END
3. WIRE: 28AWG [7X36] x9C +ALUMINUM FOIL W/ BRAID 65%, UL2464+CSA, COLOR BLACK
4. PINDOUT:

P1		P2
1	_____	BLACK
2	_____	BROWN
3	_____	RED
4	_____	ORANGE
5	_____	YELLOW
6	_____	GREEN
7	_____	BLUE
8	_____	VIOLET
9	_____	GRAY
SHELL	_____	SHIELD

P/N	L ± T
CCA-009-I18R152	18±0.590in
CCA-009-I36R152	36±0.787in
CCA-009-I72R152	72±0.984in
CCA-009-M.5R152	500±15mm
CCA-009-M01R152	1000±20mm
CCA-009-M02R152	2000±25mm
CCA-009-M03R152	3000±35mm

**NOTE:**

\*\*NOT DESIGNED TO MATE WITH NORCOMP 580-M // 581-M SERIES CONNECTORS. IF ANY QUESTIONS PLEASE CONTACT ENG@NORCOMP.NET

PACKAGED: 1 PER BAG

**DO NOT SCALE FROM DRAWING**

**RoHS COMPLIANT**



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
P. JENKINS  
DATE:  
01/18/2012

**NorComp**

SCALE: NTS	SHEET 1	OF 1	REV 5
DWG NO. CCA-009-YYYYR152			