


**Model No: NS15M32003-01**

Rev : 1.0

**Product Description**

High sensitivity, high reliability, thick gold plating of contact shrapnel, good conductivity and high durability

**Mechanical Drawing**

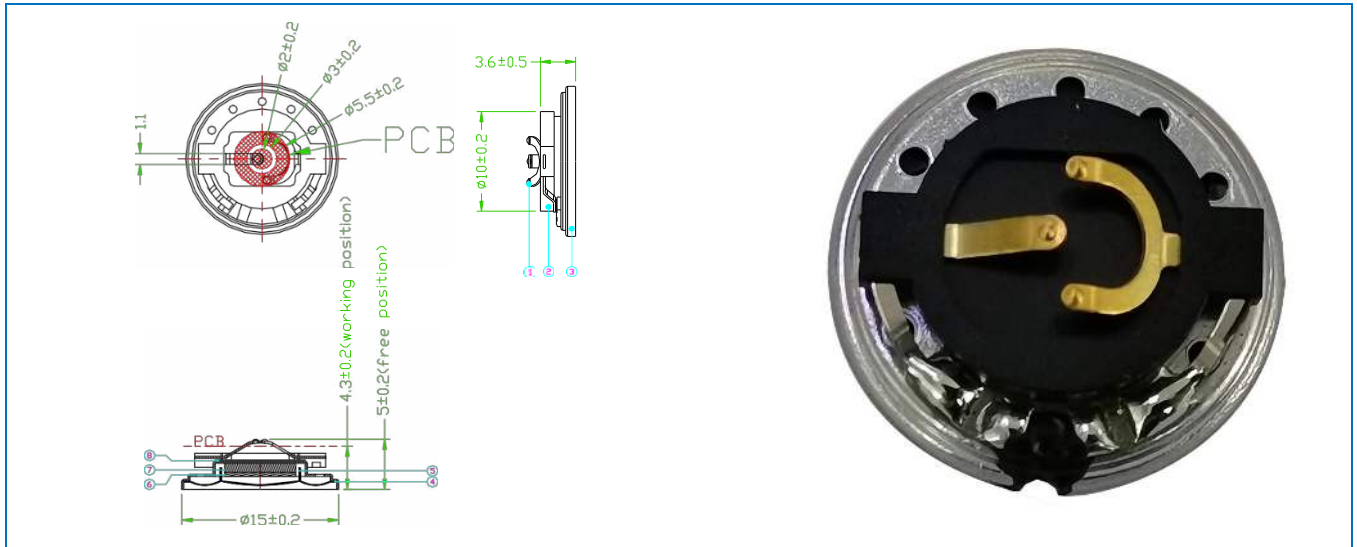

**Specifications**

ITEMS	DATA	UNIT	ITEMS	DATA	UNIT
Impedance	32	Ohm	F <sub>0</sub>	1400	Hz
Sensitivity	86	dB	Frequency Range	1200-10K	Hz
THD	15	%	Weight	1.2	g
Rated Power	0.3	W	Operating Temp	-40~85	°C
Max Power	0.5	W			

**Frequency Response Curve**

